



PRODUCT CATALOGUE
GRABENMEISTER · 2024

• LINGENER BAUMASCHINEN · SINCE 1964

Earthwork in *Perfection*

Technically sophisticated trenchers – developed and built in
Lingen, at work around the world.

TRENCHING

LOADING

BACKFILLING



The *Grabenmeister* at a glance.

From our company history and our manufacturing in Germany to the complete machine range – this catalogue guides you through the entire programme of Lingener Baumaschinen.

01	Our History	Since 1964	P. 03
02	Made in Germany	Built in Lingen	P. 04
03	Range & Applications	Overview	P. 05
04	Self-Propelled	GM 1 – GM 6 · Drainage Plough	P. 06
05	Attachment Trenchers	Tractor · Excavator	P. 14
06	Special Machines	Ploughs & Deep Trenchers	P. 22
07	Accessories & Spare Parts	For every job	P. 26
08	Service & Rental	Direct from the maker	P. 27
09	Contact	Lingen (Ems)	P. 28

QUALITY FROM THE EMSLAND

“Our many years of experience are your guarantee of know-how, service and reliable machines.”

Six Decades of *Grabenmeister*.

1964 Founded in Lingen

The Grabenmeister brand is born. Even the very first trenchers prove themselves and are sold worldwide – built in a small production hall.

1970s Growing Demand

Rising demand and an expanding product range call for larger, modernised production facilities.

1994 New Premises

We move into our present company building in Lingen, where we welcome our customers to this day.

Today Worldwide

Over 30 machine types and a worldwide sales and service network – with the same ambition as in 1964: earthwork in perfection.

IN FIGURES

60

YEARS

30+

TYPES

Worldwide

SALES & SERVICE



Built in *Lingen*.

Since 1964 we have developed and built our trenchers in Germany. For us, "Made in Germany" is not a label but a standard: precise engineering, solid workmanship and machines that endure the toughest conditions.

01

Engineering & Manufacturing in Lingen

Design, production and assembly under one roof in the Emsland – every machine is built by us in Germany.

02

German Craftsmanship

High-grade steel, rugged construction and well-engineered technology ensure long service life and high breaking loads.

03

Service from a Single Source

A direct line to the manufacturer, no middleman and a fast, reliable spare-parts supply.

04

Present Worldwide

Grabenmeister machines work on construction sites around the globe – with local service and sales partners.

"Earthwork in perfection – designed, built and tested in Germany."

A machine for every *trench*.

From compact attachments to self-propelled special machines – Grabenmeister trenchers handle the most varied tasks in fibre, civil, cable, lightning-protection, solar, pipe and drainage as well as golf- and sports-field construction.

SERIES 1

Self-Propelled

GM 1 – GM 6, wheeled & tracked, drainage plough

SERIES 2

Attachment Trenchers



For tractors & excavators


SERIES 3

Special Machines

Deep trenchers, ploughs, special depths

– APPLICATIONS

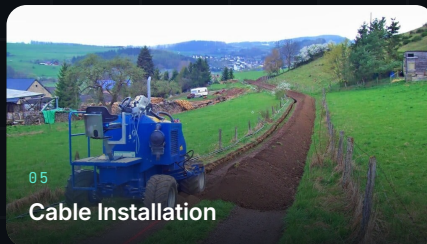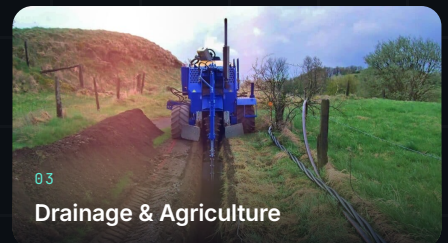

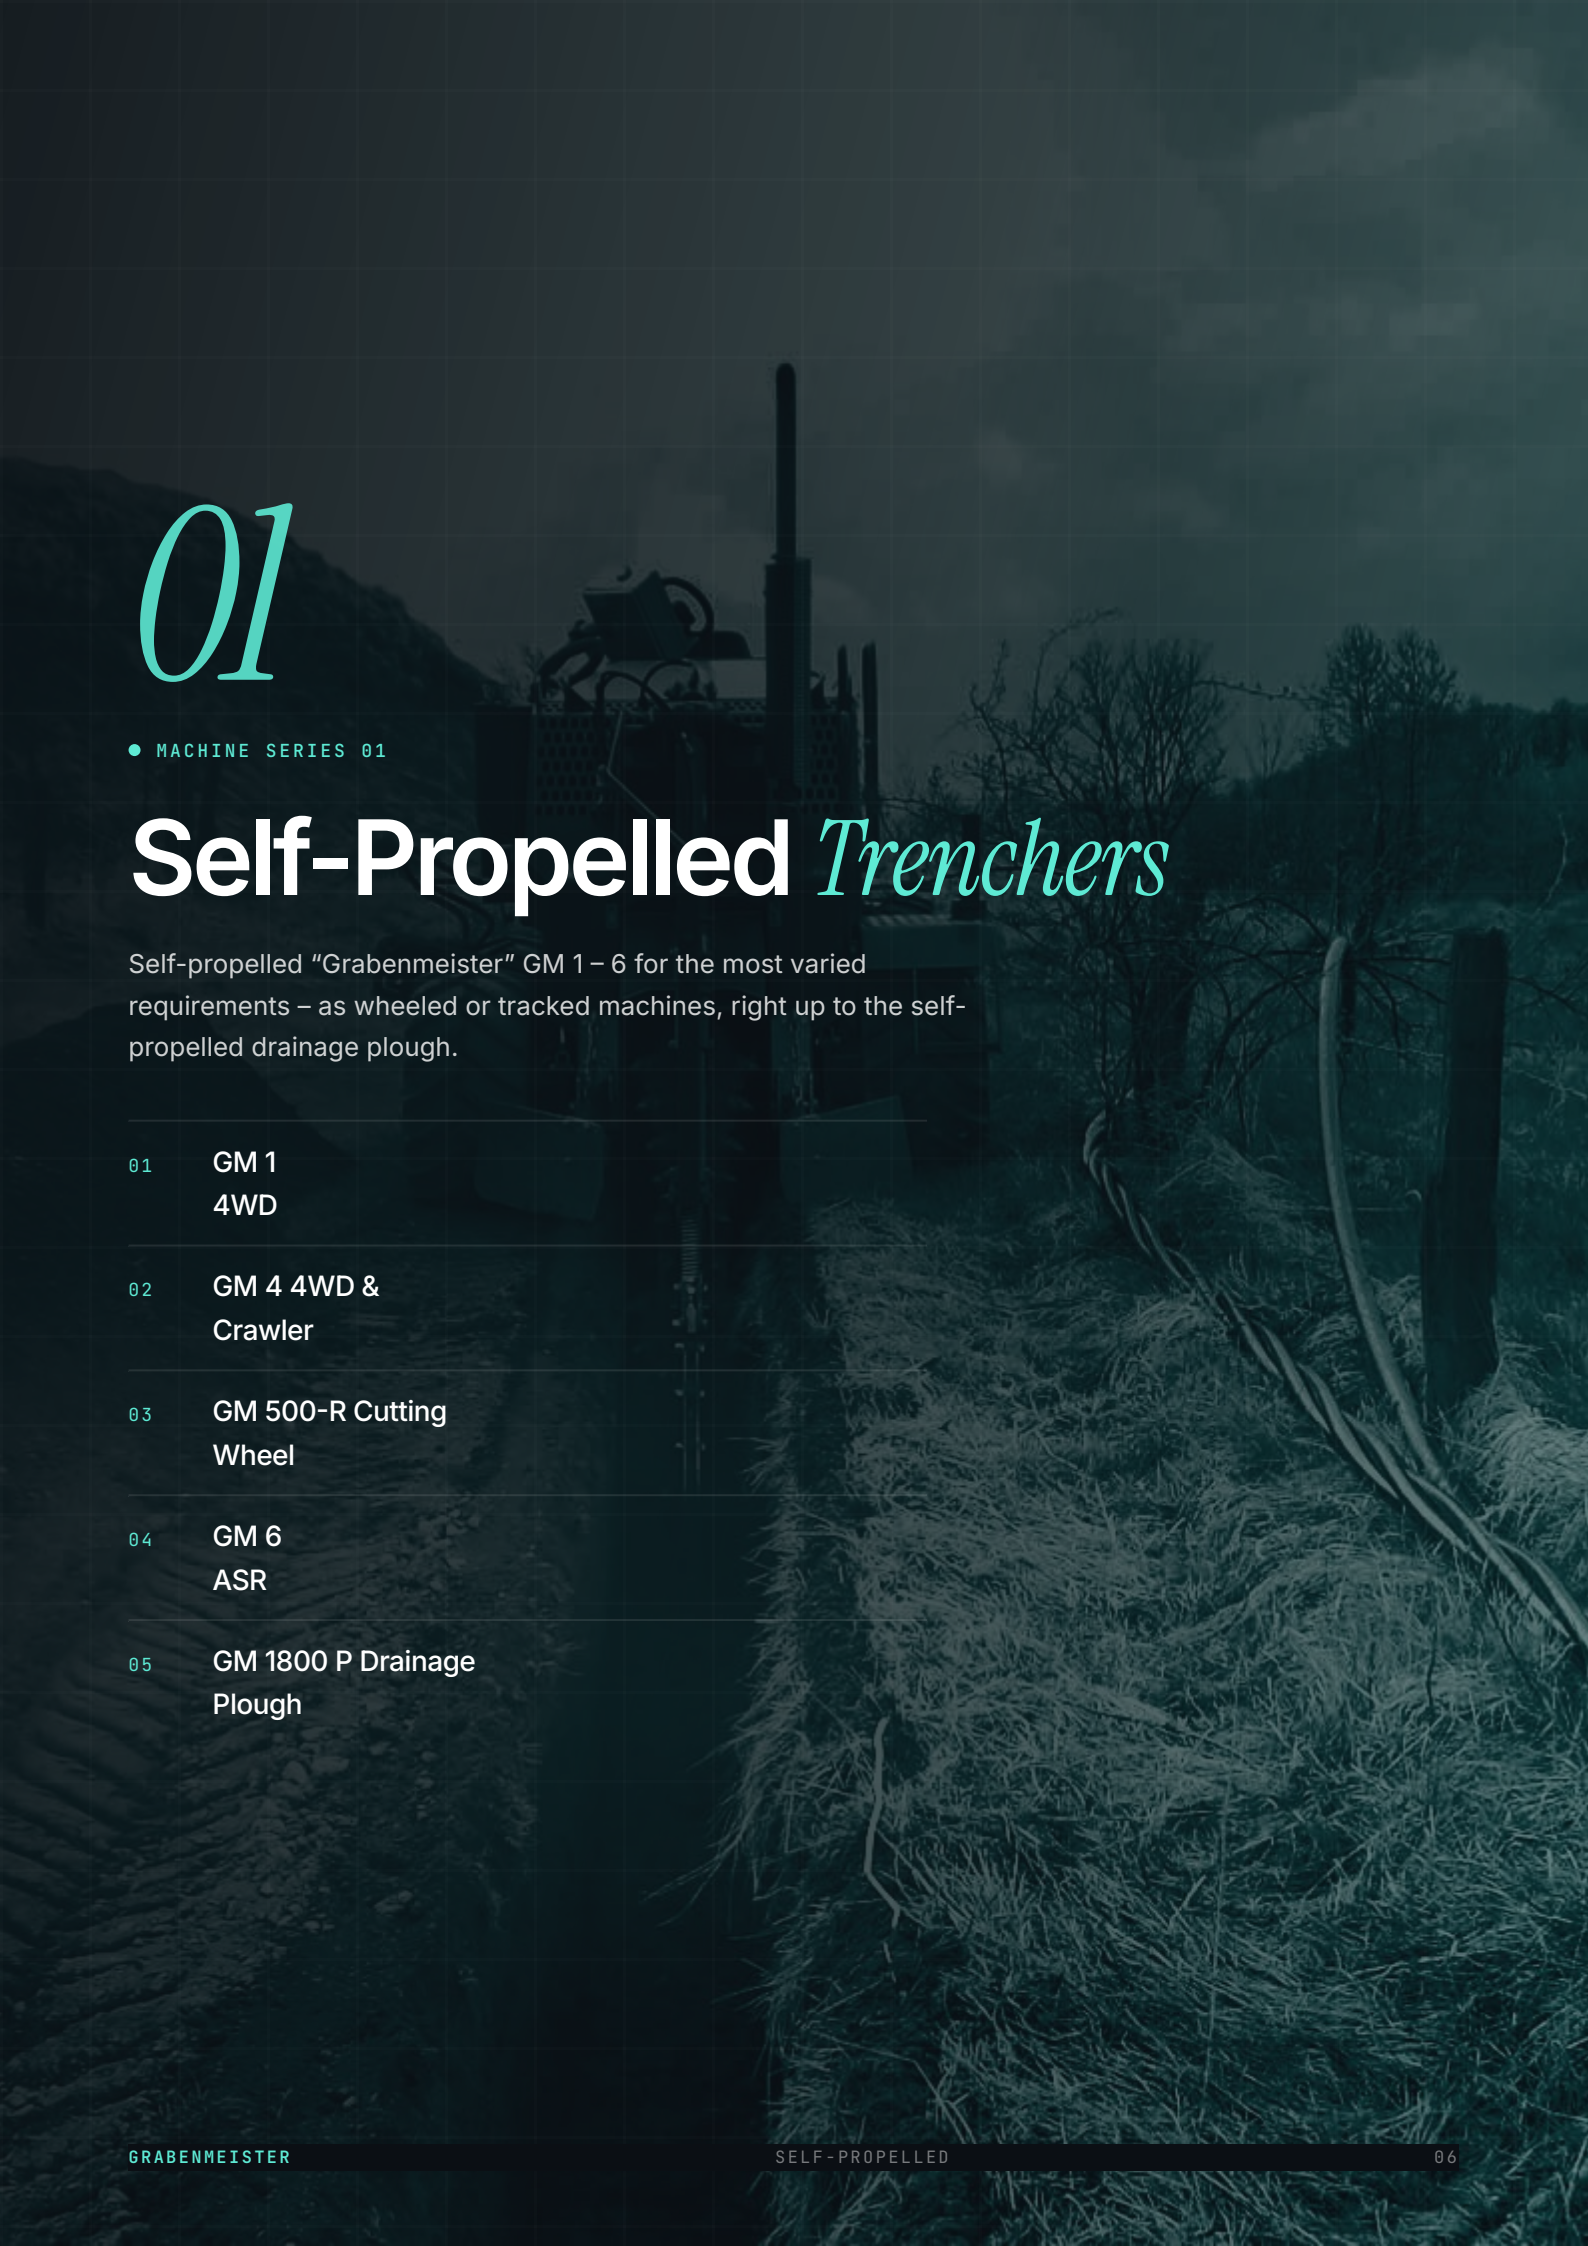

01

● MACHINE SERIES 01

Self-Propelled *Trenchers*

Self-propelled "Grabenmeister" GM 1 – 6 for the most varied requirements – as wheeled or tracked machines, right up to the self-propelled drainage plough.

- | | |
|----|------------------------------|
| 01 | GM 1
4WD |
| 02 | GM 4 4WD &
Crawler |
| 03 | GM 500-R Cutting
Wheel |
| 04 | GM 6
ASR |
| 05 | GM 1800 P Drainage
Plough |

Self-Propelled GM 1-6

The self-propelled "Grabenmeister" GM 1 – 6 can be used for the most varied requirements. Technical data depends on the type. GM 4 4×4 to GM 6 ASR are also available for hire with an operator.

- | | |
|----|--|
| 01 | Undercarriage: 4×4 all-wheel drive or crawler undercarriage with steel track and rubberised ground plates |
| 02 | Cutting-bar depth: 600 / 850 / 1,100 / 1,250 / 1,500 / 1,700 mm (special depths up to 3,000 mm) |
| 03 | Cutting widths: 70 – 600 mm |
| 04 | Cutting chains: knife chain · carbide-chisel chain · mixed chains |
| 05 | Chain pitch: 44.45 / 75 / 100 mm |
| 06 | Optional equipment: laser, slot equipment, loading conveyor, backfill hopper, backfill auger, reel, dozer blade, cab, offsettable cutting bar |
| 07 | Power: 26 kW – 350 kW |
| 08 | Weight: 1,960 kg – 17,000 kg |
| 09 | Dimensions: 4,100–9,100 mm L · 1,300–2,500 mm W · 2,300–3,100 mm H |



GM 6 ASR · SELF-PROPELLED WITH CRAWLER UNDERCARRIAGE

● SELF-PROPELLED · 4x4 WHEELED

GM 1 4WD

— GM 1 4WD · COMPACT SELF-PROPELLED TRENCHER

The compact entry into the self-propelled class.

The GM 1 4WD is the agile all-rounder among the self-propelled trenchers. The operator platform can be positioned above the wheel, giving a direct view into the trench. The 3-cylinder diesel engine with all-wheel drive provides sure traction even on soft ground.

LENGTH 4,400 MM

WIDTH 1,310 MM

HEIGHT 1,600 MM

WEIGHT APPROX. 1,960 KG

DRIVE 3-CYL. DIESEL · 4WD

STANDARD EQUIPMENT

- 01 3-cylinder diesel engine with all-wheel drive
- 02 Repositionable operator platform – direct trench view
- 03 Conveyor belt for lateral spoil discharge
- 04 Special wide tyres with fine-cleat tread

OPTIONS

- 01 Backfill hopper for immediate backfilling
- 02 Loading conveyor
- 03 Laser system for depth control
- 04 Knife, mixed and chisel chains

Custom configuration on request.

● SELF-PROPELLED · 4×4 WHEELED

GM 4 4WD

— GM 4 4WD · 4-CYLINDER TRENCHER

Power and flexibility.

A powerful 4-cylinder trencher for many applications. The GM 4 4WD features hydraulic valve controls and allows the operator platform to be placed front-left above the wheel – for a direct view into the trench. Side gradients of up to 12° are compensated by the tilt mechanism; spoil can be discharged to either side or loaded directly via an additional conveyor.

ENGINE 4-CYLINDER DIESEL

TILT SIDE GRADIENT UP TO 12°

DRIVE HYDROSTATIC · 4WD

STANDARD EQUIPMENT

- | | |
|----|--|
| 01 | Cross-slope adjustment via hydraulic cylinders |
| 02 | Repositionable operator stand, front-left |
| 03 | Roll-over bar – foldable |
| 04 | Hydraulic steering |
| 05 | Special wide tyres with fine-cleat tread |
| 06 | Conveyor belt for lateral spoil discharge |
| 07 | Hydrostatic all-wheel drive |

OPTIONS

- | | |
|----|--|
| 01 | Vibratory cable plough |
| 02 | Backfill auger unit with hydraulic drive |
| 03 | 70 mm drainage-slot equipment |
| 04 | Backfill hopper · loading conveyor |
| 05 | Laser system for depth control |
| 06 | Twin tyres · hydraulic cutting wheel |
| 07 | Cab with heating and air conditioning |

Custom configuration on request.

● SELF-PROPELLED ● CRAWLER

GM 4 Crawler

— GM 4 CRAWLER · FOR DIFFICULT TERRAIN

Sure-footed on difficult ground.

The GM 4 is also available with crawler drive – ideal for working on rough, stony ground, with the track camber compensating for uneven surfaces. Powered by a 4-cylinder diesel, optionally with guide rollers for direct cable and pipe feed. The operator stand can be moved front-left, giving a direct view of the digging chain and the trench.

ENGINE 4-CYLINDER DIESEL

UNDERCARRIAGE CRAWLER

TILT UP TO 12° HYDRAULIC

STANDARD EQUIPMENT

- 01 Cross-slope adjustment via hydraulic cylinders
- 02 Repositionable operator stand, front-left
- 03 Single-lever steering control
- 04 Conveyor belt for lateral spoil discharge
- 05 Fully hydrostatic travel drive

OPTIONS

- 01 Cab with heating and air conditioning
- 02 Vibratory cable plough
- 03 Backfill auger unit (hydraulic)
- 04 70 mm drainage-slot equipment
- 05 Backfill hopper · loading conveyor
- 06 Laser system · reel for drainage pipe

Custom configuration on request.



GM 500-R Cutting Wheel

The cutting wheel for compact depths.

The "GM 500-R" cutting wheel can be mounted on our GM 4 Crawler trencher – or, for example, on a tractor with a hydraulic output of at least 100 l and 250 bar. It reaches an infinitely adjustable working depth of up to 500 mm at a working width of 50 to 200 mm.

WORKING DEPTH UP TO 500 MM

WORKING WIDTH 50 - 200 MM

HYDRAULICS MIN. 100 L / 250 BAR

STANDARD EQUIPMENT

- 01 Mounts on GM 4 Crawler or tractor
- 02 Infinitely adjustable working depth
- 03 Compact design for narrow trenches

OPTIONS

- 01 Knife, mixed and chisel chains
- 02 Laser system for depth control

Custom configuration on request.

SELF-PROPELLED CRAWLER

GM 6 ASR

GM 6 ASR - TURBO-DIESEL WITH CUTTING BOOM

Working at the best angle – for less wear.

The GM 6 ASR with turbo-diesel and crawler undercarriage is a powerful, versatile trencher with a hydraulic cutting boom. The boom can be offset laterally by up to 60 cm beyond the machine's outer edge; spoil is discharged to the left in the cutting direction via a hydraulic conveyor. An additional conveyor is available for direct loading onto a truck. Guide rollers enable direct cable and pipe feed.

DRIVE TURBO-DIESEL · CRAWLER

BOOM OFFSET UP TO 600 MM

TILT SIDE GRADIENT UP TO 10°

STANDARD EQUIPMENT

- 01 Hydraulic cross-slope adjustment of the cutting bar
- 02 Hydraulically offsettable cutting bar (up to 60 cm)
- 03 Hydraulically swivelling cab
- 04 Hydrostatic crawler drive

OPTIONS

- 01 Cab with heating and air conditioning
- 02 Backfill auger or dozer blade
- 03 Loading conveyor for front loading
- 04 Cable-drum holder · laser system
- 05 Knife, chisel and mixed chains
- 06 Reel for drainage pipe

Custom configuration on request.

● SELF-PROPELLED ● DRAINAGE PLOUGH

GM 1800 P

— GM 1800 P — SELF-PROPELLED DRAINAGE PLOUGH

New – the drainage plough of the top class.

The Grabenmeister GM 1800 P drainage plough is the result of our many years of experience in building drainage machines, drainage ploughs and trenchers. It meets the highest demands in drainage work and in pulling trenches for cable, gas and water lines. Around 400 hp of engine power and a fully hydrostatic crawler travel drive, controlled by joystick. The undercarriages extend hydraulically from 2,700 to 4,000 mm track width.

ENGINE POWER APPROX. 400 HP

PLOUGH DEPTH 1,800 MM

TRACK WIDTH 2,700 – 4,000 MM

WEIGHT APPROX. 30,000 KG

STANDARD EQUIPMENT

- | | |
|----|--|
| 01 | Chassis 2,700 mm (opt. hydr. up to 4,000 mm) |
| 02 | Hydraulically offsettable plough blade |
| 03 | Hydraulically swivelling and extending cab |
| 04 | Hydrostatic crawler drive with joystick |
| 05 | Cab with heating, A/C and sunroof |
| 06 | Self-levelling vehicle cab |

OPTIONS

- | | |
|----|--------------------------------|
| 01 | Cable-drum holder |
| 02 | Laser system for depth control |
| 03 | GPS control with recording |
| 04 | Optional: air-sprung cab |
| 05 | Reel for drainage pipe |

Custom configuration on request.

02

● MACHINE SERIES 02

Attachment Trenchers for **Tractor & Excavator**

Attachment trenchers "Grabenmeister" for tractors and excavators in various power classes – economical, flexible and quick to mount.

- | | |
|----|-------------------------|
| 01 | GM 1-
AS |
| 02 | GM 140
AF |
| 03 | GM 160 AS /
AF |
| 04 | GM 140
H |
| 05 | GM 140 AFH-500 /
600 |

Attachment Trenchers at a glance

Attachment trenchers "Grabenmeister" for tractors and excavators in various power classes. Technical data depends on the type.

- | | |
|----|--|
| 01 | Drive: mechanical via PTO or hydraulic |
| 02 | Cutting-bar depth: 600 / 850 / 1,250 / 1,600 mm (special depths also available) |
| 03 | Cutting widths: 70 – 600 mm |
| 04 | Cutting chains: knife chain · carbide-chisel chain · mixed chains |
| 05 | Chain pitch: 44.45 / 75 / 100 mm |
| 06 | Optional equipment: laser, slot equipment, loading conveyor, pipe-laying chute, backfill auger, reel, offsettable cutting bar, bottom cleaner |
| 07 | Weight: 600 kg – 2,900 kg |
| 08 | Dimensions: 3,100–4,400 mm L · 1,500–1,800 mm W · 1,400–2,000 mm H |



GM 140 AF · ATTACHMENT TRENCHER FOR TRACTORS

GM 1-AS

GM 1-AS · LIGHT ATTACHMENT TRENCHER

Economical and strong.

The GM 1-AS is an attachment trencher for mounting on tractors with a rear three-point linkage – ideal for laying cable, pipe and drainage pipe. Its low weight allows operation even on very small tractors. It can be fitted with digging booms (600–1,200 mm) and cutting knives (70–300 mm); by reconfiguring the chain, slot drainage 70 mm wide is possible. Driven by the PTO, with spoil deposited by two augers.

DIGGING BOOMS 600 – 1,200 MM

CUTTING KNIVES 70 – 300 MM

SLOT DRAINAGE 70 MM

DRIVE PTO

STANDARD EQUIPMENT

- 01 Mounting on the tractor's three-point linkage
- 02 Drive via PTO
- 03 Spoil deposit via two augers
- 04 Low dead weight

OPTIONS

- 01 Bottom cleaner with depth adjustment
- 02 Laser system (manual or automatic)
- 03 Pipe pick-up and laying chute
- 04 Knife, chisel and mixed chains

Custom configuration on request.



GM 140 AF

GM 140 AF • ATTACHMENT TRENCHER FOR TRACTORS

Powerful and flexible.

The GM 140 AF is an attachment trencher for mounting on tractors with a three-point linkage – ideal for laying cable, pipe and drainage pipe. It can be fitted with digging booms from 600 to 1,600 mm deep and cutting widths up to 400 mm; drive is via the PTO. An optional tilt compensation ensures clean work on slopes, and a conveyor deposits spoil to the side.

DIGGING BOOMS 600 – 1,600 MM

CUTTING WIDTH UP TO 400 MM

REQUIREMENT 80 – 140 HP

DRIVE PTO

STANDARD EQUIPMENT

- 01 Mounting on the three-point tractor
- 02 Drive via PTO
- 03 Offsettable cutting bar
- 04 Optional: tilt compensation for cross-slope

OPTIONS

- 01 Loading conveyor for direct loading
- 02 Bottom cleaner with depth adjustment
- 03 Laser system (manual or automatic)
- 04 Pipe-laying system, reel
- 05 Knife, chisel and mixed chains

Custom configuration on request.

GM 160 AS / AF

— GM 160 AS/AF · VERSATILE ATTACHMENT TRENCHER

Versatile in use.

The GM 160 AS/AF is an attachment trencher for mounting on tractors with a rear three-point linkage. The cutting bar can be offset mechanically or hydraulically by up to 600 mm. It can be fitted with digging booms from 600 to 1,600 mm deep and chain widths from 150 to 470 mm; drive is via the PTO or, optionally, a hydraulic motor. As the GM 160 AF it comes with a hydraulic conveyor for lateral spoil deposit.

DIGGING BOOMS 600 – 1,600 MM

CHAIN WIDTH 150 – 470 MM

REQUIREMENT FROM 120 HP

STANDARD EQUIPMENT

- 01 Offsettable cutting bar (up to 600 mm)
- 02 Drive via PTO or hydraulic motor (opt.)
- 03 GM 160 AF with hydraulic conveyor

OPTIONS

- 01 Loading conveyor for direct loading
- 02 100 mm chain, cutting widths 150–470 mm
- 03 Bottom cleaner with depth adjustment
- 04 Laser system · pipe-laying system, reel
- 05 Knife, chisel and mixed chains

Custom configuration on request.

GM 140 H

— GM 140 H · EXCAVATOR TRENCHER, 2 CUTTING BARS

More flexibility on the excavator.

The GM 140 H attachment trencher with two cutting bars was designed specifically for use on hydraulic excavators. Mounted on an excavator arm, it reaches a large working area and can work over obstacles – laterally, parallel to the direction of travel. This often makes it an ideal alternative to the self-propelled trenchers. The GMA series cuts the trench as narrow as possible, saving costs when reinstating the ground.

TYPE 2 CUTTING BARS

USE HYDRAULIC EXCAVATOR

DEPTH CONTROL MANUAL / LASER

STANDARD EQUIPMENT

- | | |
|----|--|
| 01 | Designed for hydraulic excavators (2 cutting bars) |
| 02 | Large working area, working over obstacles |
| 03 | Infinite depth control (manual or laser) |
| 04 | Narrow trench – lower reinstatement costs |

OPTIONS

- | | |
|----|---|
| 01 | Various cutting bars |
| 02 | Pipe-laying chutes |
| 03 | Cable-reel holders in various versions |
| 04 | One/two backfill augers for lateral deposit |

Custom configuration on request.

GM 140 AFH-500

— GM 140 AFH-500 · WITH HYDRAULIC SLEWING RING

Offset trenching on the road-rail excavator.

The "GM 140 AFH-500" excavator trencher is fitted with a hydraulic slewing ring, enabling trenching offset to the excavator – necessary when the trench runs directly along or behind obstacles such as crash barriers, embankments, hedges or walls. Thanks to quick-change systems it can be attached and removed in the shortest time, so the deployment pays off even on short trenching distances. A conveyor that can be inserted on either side keeps the trench edge clear.

USE ROAD-RAIL EXCAVATOR

CHAIN 75 MM

CUTTING WIDTHS 120 - 400 MM

STANDARD EQUIPMENT

- 01 Hydraulic slewing ring – offset trenching
- 02 Quick-change system for fast fitting/removal
- 03 Conveyor insertable on either side
- 04 Spoil deposit on the backfill side

OPTIONS

- 01 Loading conveyor for direct loading
- 02 75 mm chain, cutting widths 120–400 mm
- 03 Knife, chisel and mixed chains
- 04 Bottom cleaner · laser system
- 05 Conversion kit for three-point tractor

Custom configuration on request.

GM 140 AFH-600

— GM 140 AFH-600 • TWIN-BAR SYSTEM UP TO 600 MM

Many applications – up to 600 mm.

The “GM 140 AFH-600” offers a wide range of uses in fibre-optic laying, pipeline and track construction. Its hydraulic slewing ring allows trenching behind or directly along obstacles such as crash barriers and embankments. Thanks to a quick-change system it is rapidly fitted and removed, so even short trenching routes are worthwhile. With the twin-bar system, cutting widths up to a maximum of 600 mm are possible; a conveyor inserted on the left or right keeps the trench edge clear.

USE ROAD-RAIL EXCAVATOR

CUTTING WIDTH UP TO 600 MM

SYSTEM SINGLE / TWIN BAR

STANDARD EQUIPMENT

- 01 Hydraulic slewing ring – trenching along obstacles
- 02 Twin-bar system for cutting widths up to 600 mm
- 03 Quick-change system for fast fitting/removal
- 04 Conveyor insertable left/right

OPTIONS

- 01 Loading conveyor for direct loading
- 02 75 mm chain: 120–400 mm / 500+600 mm
- 03 Knife, chisel and mixed chains
- 04 Bottom cleaner · laser system
- 05 Pipe-laying system, reel

Custom configuration on request.

03

● MACHINE SERIES 03

Special Machines

For special depths and laying tasks: self-propelled drainage ploughs, laying ploughs and deep trenchers down to 4,500 mm.

- 01 GM 300 H deep trencher
- 02 GM 1800 P drainage plough
- 03 GMV 130 plough
- 04 GM 450 H deep trencher

Drainage Ploughs & *Deep Trenchers*

Special machines in various power classes for special depths and laying tasks.
Technical data depends on the type.



GM 300 H

DEEP TRENCHER • 3,000 MM

Self-propelled deep trencher for special depths up to 4,500 mm.

- 01 **Engine:** Deutz / Caterpillar
- 02 **Depth:** 3,000 / 4,500 mm
- 03 **Width:** 150 – 450 mm
- 04 **Chain:** bucket • 125 mm
- 05 **Weight:** 10,700–20,000 kg



GM 1800 P

DRAINAGE PLOUGH

Self-propelled drainage plough with around 400 hp.

- 01 **Engine:** Deutz • approx. 400 hp
- 02 **Plough depth:** 1,800 mm
- 03 **Track:** 2,700 – 4,000 mm
- 04 **Extra:** laser • GPS
- 05 **Weight:** approx. 30,000 kg



GMV 130

LAYING PLOUGH

Compact laying plough for tractor, crawler and excavator.

- 01 **Plough depth:** max. 1,300 mm
- 02 **Width:** max. 80 mm
- 03 **Carrier:** from 150 hp / 20 t
- 04 **Weight:** approx. 2,700 kg

“The right machine for every depth – right up to bespoke special solutions.”

SPECIAL DEPTHS UP TO 4,500 MM

BUCKET & KNIFE CHAINS

CUSTOM BUILDS ON REQUEST

GMV 130

— GMV 130 — VERSATILE LAYING PLOUGH

The versatile laying plough.

The "GMV 130" plough was designed specifically for tractors, crawler vehicles or hydraulic excavators. As an attachment it runs on three-point tractors with continuously variable transmission or super-creeper gear from 150 hp, and on hydraulic excavators from 20 t. It reaches a maximum working depth of 1,300 mm and simultaneously pulls in several pipes or cables up to a diameter of 80 mm.

PLOUGH DEPTH MAX. 1,300 MM

DIAMETER MAX. 80 MM

CARRIER FROM 150 HP / EXCAVATOR FROM 20 T

WEIGHT APPROX. 2,700 KG

STANDARD EQUIPMENT

- 01 Attaches to three-point tractor or hydraulic excavator
- 02 Working depth up to 1,300 mm
- 03 Multiple pipe/cable feed up to Ø 80 mm

OPTIONS

- 01 Laser system for depth control
- 02 Pipe-laying accessories
- 03 Reel for drainage pipe

Custom configuration on request.

GM 450 H

GM 450 H · DEEP TRENCHER ON CLAAS XERION

Deep trencher down to 4,500 mm.

This special machine reaches a working depth of 4,500 mm and is mounted on a CLAAS Xerion using a hydraulic auxiliary frame. For trenching, the auxiliary frame is moved from the horizontal rest position into the vertical, and the cutting boom is driven hydraulically up to 4,500 mm into the ground via a guide carriage. The bucket chain conveys the soil upwards and throws it to the side over a deflector plate. The cutting boom and laying chute are removable – so other trenching depths can be realised as well.

WORKING DEPTH UP TO 4,500 MM

CARRIER VEHICLE CLAAS XERION

CHAIN BUCKET CHAIN

STANDARD EQUIPMENT

- 01 Mounted on CLAAS Xerion with hydr. auxiliary frame
- 02 Bucket chain with lateral soil discharge
- 03 Removable cutting boom and laying chute


OPTIONS

- 01 Variable trenching depths through conversion
- 02 Laying chute for pipes
- 03 Laser system for depth control

Custom configuration on request.

More function for your *machines*.

Whether tractor, loader, wheel loader or our Grabenmeister: we offer useful and practical accessories to equip your machines ideally for every job. Further accessories on request.

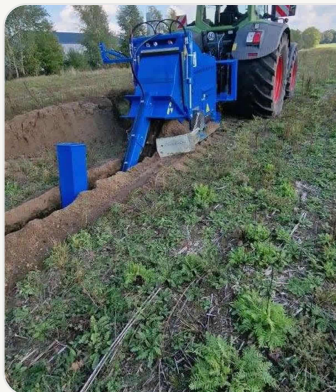

01

Backfill Hoppers

In various dimensions, as standard with a hydraulically adjustable axle and adjustable backfill height. Optionally with feed augers, compaction wheel and a hydraulic opening mechanism. Capacity



02

Backfill Augers

For wheel loaders with hydraulic drive and tractors with three-point linkage and PTO drive. Controllable vertically and horizontally by hydraulic cylinder, available as a push and pull auger.



03

Dozer Blades

In various sizes and versions, made from high-grade steel. Individually adapted to your needs on request and controllable vertically and horizontally by hydraulic cylinder.



04

Laying Accessories

For easier laying of drainage, lines and cables – for laying work in a single pass and thus noticeably less time.

Direct from the *manufacturer*.

With LIBA you get everything from a single source – from advice through rental and sales to service and spare parts. No middleman, with short distances and people who know your machine.



01 · RENT INSTEAD OF BUY

Rental

Our self-propelled GM 4 to GM 6 are available for hire with an



02 · FAST & RELIABLE

Service & Spare Parts

Maintenance, repair and a fast spare-parts supply – directly from



03 · CHECKED & AVAILABLE

Used Machines

Inspected used Grabenmeister machines, ready to work

NO MIDDLEMAN

“You talk directly with the people who designed and built your machine.”

ADVICE & RENTAL

+49 (0) 591 76 314

info@lingener-baumaschinen.de

MON - FRI · 08:00 - 16:00



Earthwork in *Perfection* – since 1964.

Get in touch. We will gladly advise you on the sale, rental and service of our Grabenmeister machines – competent and direct from Lingen.

TRENCHING

LOADING

BACKFILLING

ADDRESS

LIBA Lingener Baumaschinen GmbH & Co. KG
Diekstraße 59 · 49809 Lingen (Ems) · Germany

CONTACT

Phone +49 (0) 591 76 314 · Fax 0591 76547
info@lingener-baumaschinen.de
www.lingener-baumaschinen.de