


Main axle: rear, front and gear orientation

Corrected R3 • 54 mm frame posts • 186 mm axle • identical for 16x / 32x / 64x

REAR — main ballast bowl side

FRONT — pendulum side

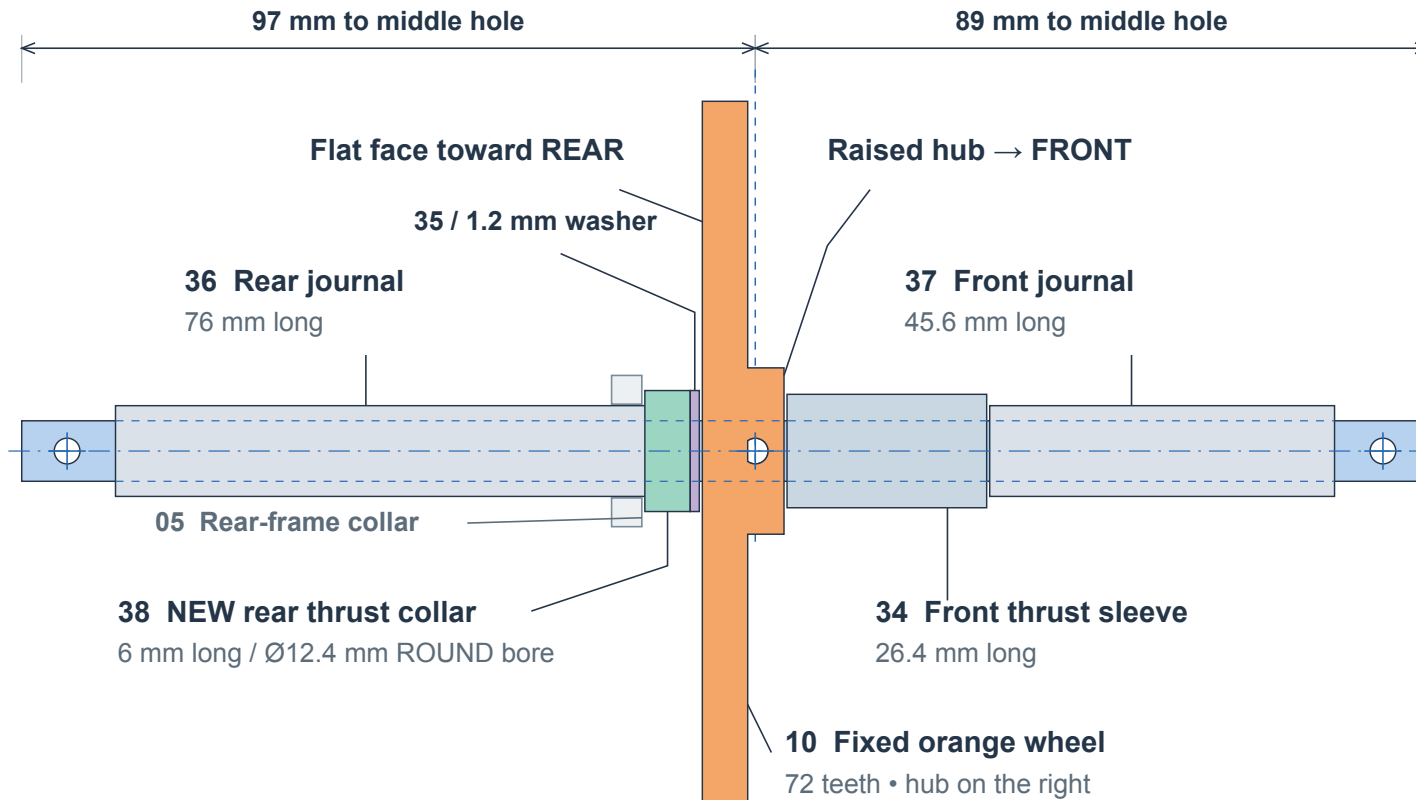

CHECK THE ASSEMBLY

Long side of the middle hole:
REAR (97 mm).


Fix gear 10 at this middle hole
with one M3x16 screw + nut.

38 surrounds rear journal 36.
It fits between frame 05
and rear thrust washer 35.
Parts are in their assembled
positions. Small gaps are
intentional; do not clamp tight.

Rear frame collar shown in section.
Other frame parts / drum omitted.

Lay the bare axle on the outline
below to identify its three holes.

BARE AXLE 03 • 8 mm square • Ø3.4 mm cross-holes

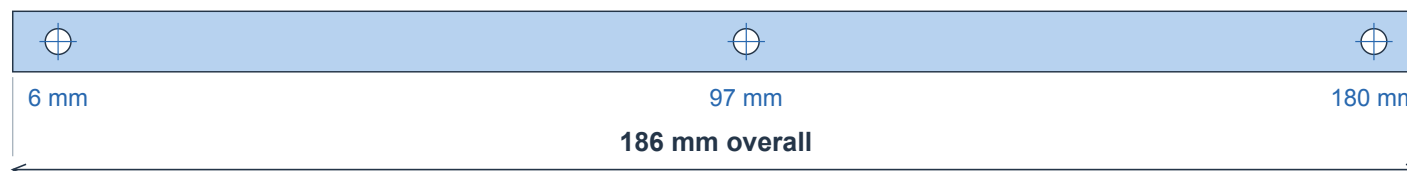

Hole labels are measured from the REAR end. Both end holes are 6 mm from their nearest end.

This bar must measure 50 mm

Print A4 landscape at 100% / Actual size.
Disable Fit / Shrink. Check the bar first.