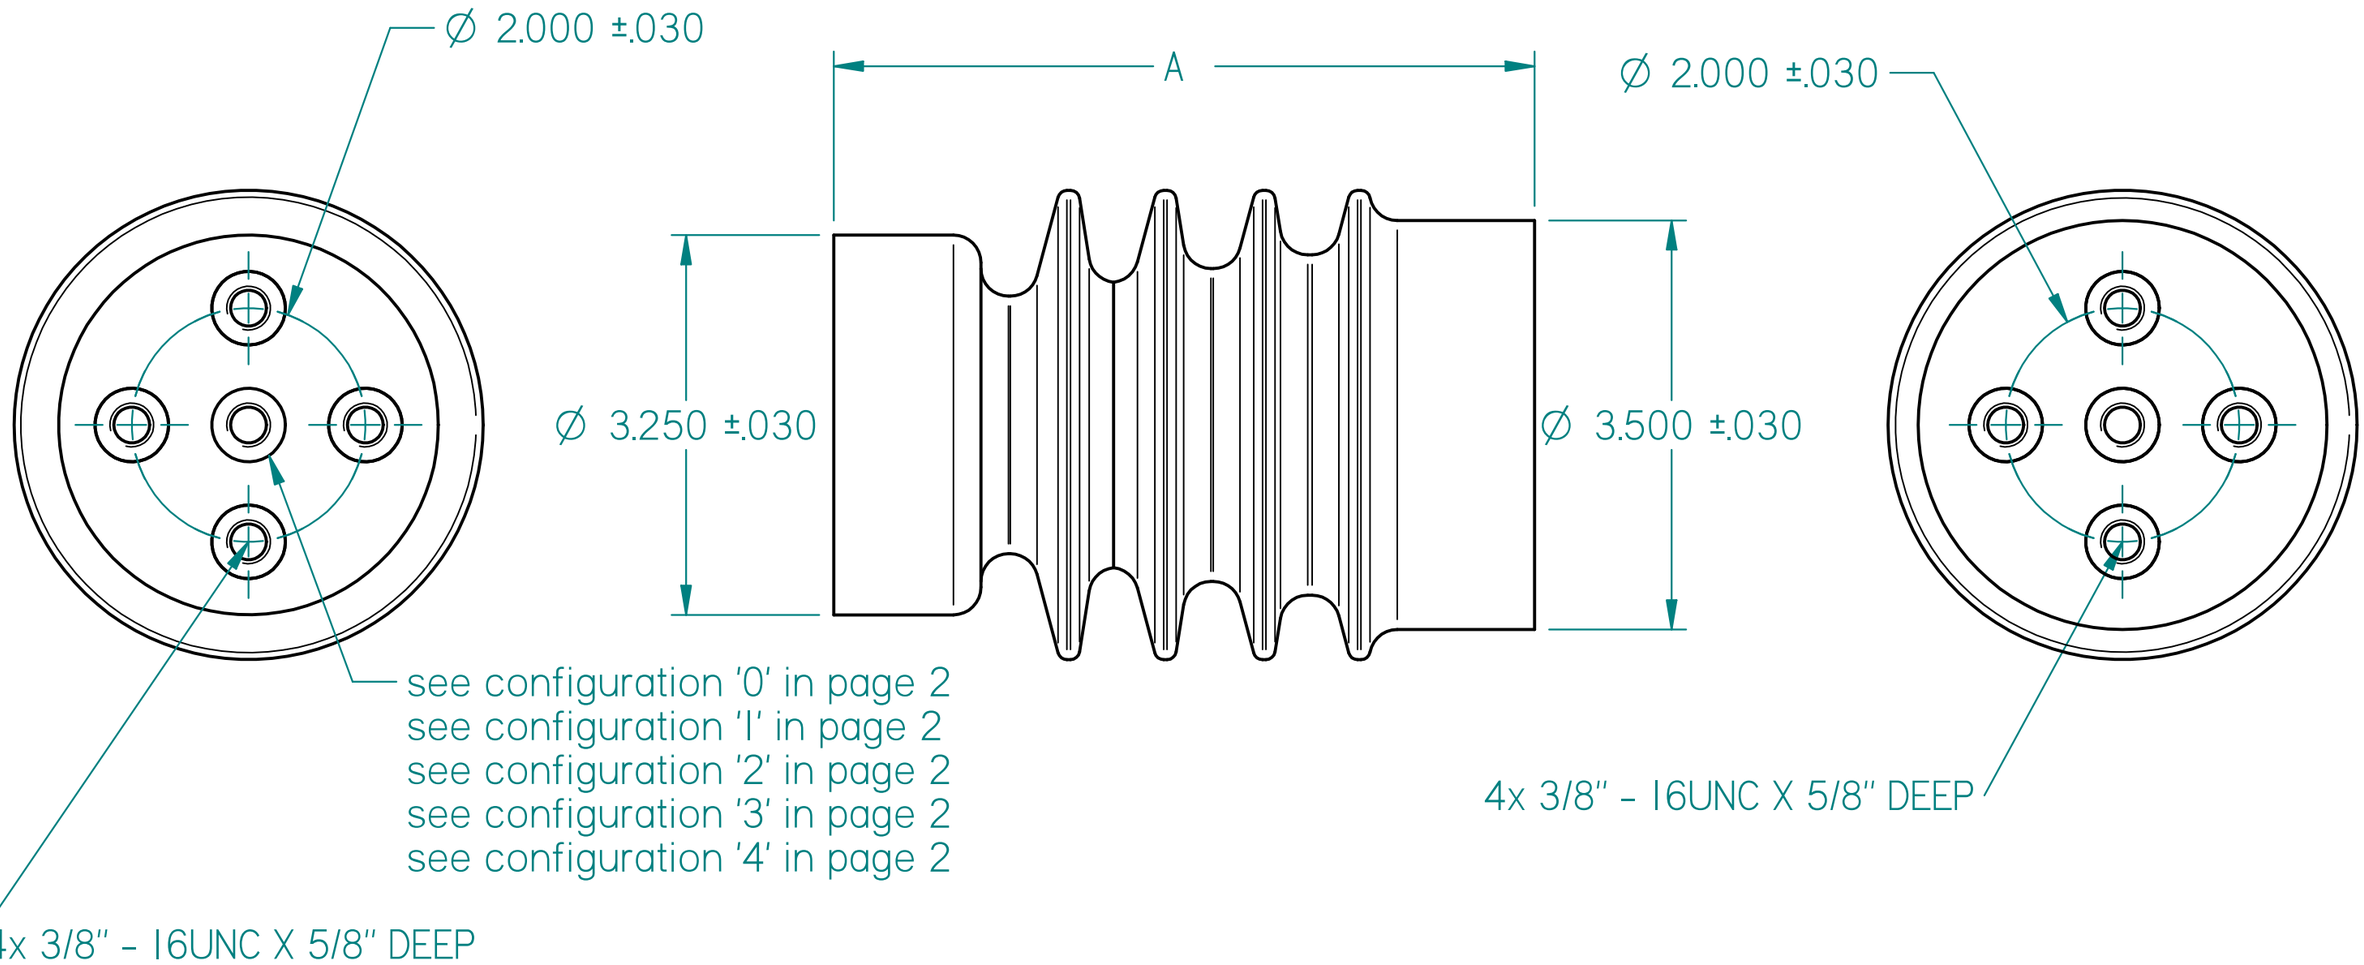


NOTE:

1. *All Dimensions are in INCHES*
2. *MATERIAL : EPOXY RESIN*
3. *ALL INSERTS ARE 304SST MATERIAL.*
4. *Unifo*rm strength Switch and Bus insulators are tested in accordance with ANSI C29.1-1988
5. The no. of Ribs and profile can change according to the capacity/application of the Insulator.

-FOR "BIL" RATINGS 95kV AND HIGHER, ALL INSERT CONFIGURATIONS WITH 3 OR MORE INSERTS ON EITHER END, WILL BE INTERNALLY CONNECTED (COMMON), ALLOWING FOR SELECTIVE APPLICATIONS.
-BREAK ALL SHARPS UNLESS OTHERWISE NOTED
-

THIRD ANGLE

THIS DRAWING IS PROPERTY OF ACCRETION POWER, LLC. - UNAUTHORISED USE BY COPYING ANY PARTY WHATSOEVER IS STRICTLY PROHIBITED

STANDARD TOLERANCES UNLESS OTHERWISE SPECIFIED			
	LINEAR DIMENSION	0.5 UP TO 3	±0.1
		OVER 3 UP TO 6	±0.1
		OVER 6 UP TO 30	±0.2
		OVER 30 UP TO 120	±0.3
		OVER 120 UP TO 400	±0.5
		OVER 400 UP TO 1000	±0.8
	HOLE DIAMETER	1 UP TO 6	±0.1
		OVER 6 UP TO 12	±0.1
		OVER 12	±0.2
	ANGLES	DIMENSIONED ± 1°	
		UNDIMENSIONED 90° ± 2°	

ACCRETION POWER

DRN BY	CHD BY	DATE	SCALE
AKD	C.P.P	14/09/2023	N.T.S

TITLE.
A20 Insulator Set

DRG NO.
TBD

REV A

CONFIGURATION "**0**" - FOR NO INSERT

Bottom \ Top	1	2	2A	3	3A	4	5
1							
2		02	11			14	
3							
4		23	23			04	
5							

CONFIGURATION "1" - FOR 1/2" CENTER
CONFIGURATION "2" - FOR 5/8" CENTER
CONFIGURATION "3" - FOR 3/8" CENTER
CONFIGURATION "4" - FOR 3/4" CENTER

Bottom \ Top	1	2	2A	3	3A	4	5
1	01	06	06	07	07	08	09
2	10			12	13		15
3	16	17	18	03	19	20	21
4	22			24	24		25
5	26	27	27	28	28	29	05

Identification no.	Height A (in)	Creep distance(in)	Highest System Voltage(kV)	Impulse Voltage (kV)	60 Hz withstand 1 min (kV)	Cantilever (lbs)
N-005-0115	3.5	4.53	4.8	60	19	3000
N-008-0162	4.5	6.41	8.3	75	26	2250
N-015-0230	6	9.06	15	95	36	1750
N-020-0311	7.5	12.26	20	110	50	1400
N-025-0394	8.75	15.51	25	125	60	1200
N-035-0485	10.5	19.10	38	150	80	1000
N-035-0496	11	19.55	38	150	80	950
N-035-0562	12.75	22.13	38	170	80	850
N-045-0639	14	25.17	48.3	200	100	750

THIRD ANGLE

THIS DRAWING IS PROPERTY OF ACCRETION POWER, LLC. - UNAUTHORISED USE BY COPYING ANY PARTY WHATSOVER IS STRICTLY PROHIBITED

STANDARD TOLERANCES UNLESS OTHERWISE SPECIFIED

LINEAR DIMENSION	0.5 UP TO 3	±0.1
	OVER 3 UP TO 6	±0.1
	OVER 6 UP TO 30	±0.2
	OVER 30 UP TO 120	±0.3
	OVER 120 UP TO 400	±0.5
	OVER 400 UP TO 1000	±0.8
HOLE DIAMETER	1 UP TO 6	±0.1
	OVER 6 UP TO 12	±0.1
	OVER 12	±0.2
ANGLES	DIMENSIONED ± 1°	
	UNDIMENSIONED 90° ± 2°	

ACCRETION POWER

DRN BY	CHD BY	DATE	
	C.P.P		SCALE

TITLE.

DRG NO.

REV