
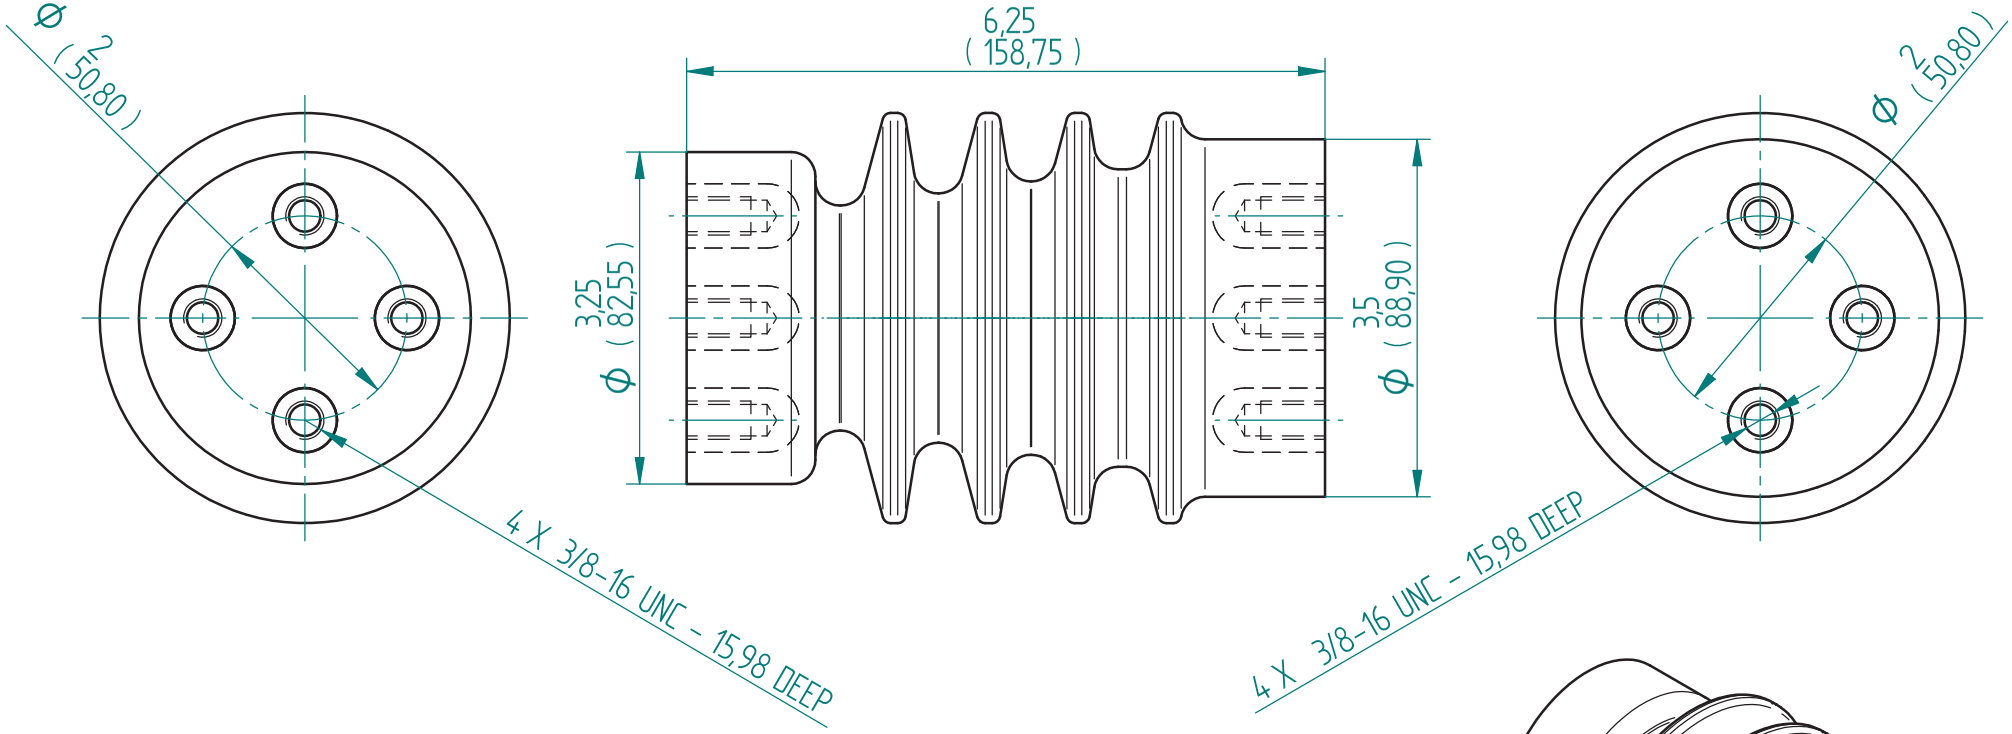


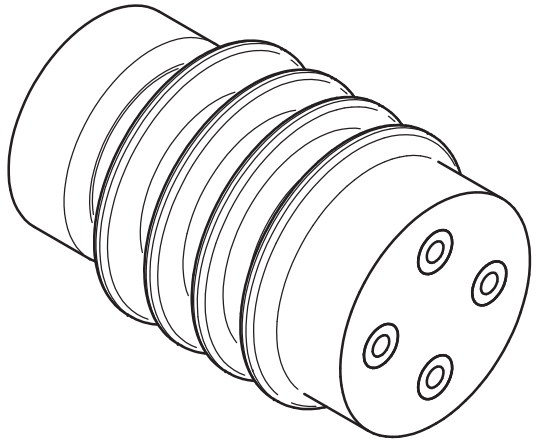

NOTE:
1. ALL DIMENSIONS ARE IN INCHES/MM
2. ALL TOLERANCES ARE IN INCHES
3. MATERIAL : EPOXY RESIN
4. RATED VOLTAGE : 15kV
5. CREEPAGE : >230MM
6. 95kV BIL
7. NO. OF INSERTS AND POSITION TO BE SELECTED BY PART NO. AND THE CONFIGURATION IS PROVIDED ON PAGE NO. 2.
-FOR "BIL" RATINGS 95kV AND HIGHER, ALL INSERT CONFIGURATIONS WITH 3 OR MORE INSERTS ON EITHER END, WILL BE INTERNALLY CONNECTED (COMMON), ALLOWING FOR SELECTIVE APPLICATIONS.
-BREAK ALL SHARPS UNLESS OTHERWISE NOTED

THIRD ANGLE

THIS DRAWING IS PROPERTY OF ACCRETON POWER AND UNAUTHORISED USE OF THERE OF BY COPYING ANY PARTY WHATSOVER IS STRICTLY PROHIBITED

STANDARD TOLERANCES UNLESS OTHERWISE SPECIFIED			
	LINEAR DIMENSION	TWO PLACE DEC.	± 0.06"
		THREE PLACE DEC.	±0.03"
	HOLE DIAMETER	1 UP TO 6	±0.02"
		OVER 6 UP TO 12	±0.02"
		OVER 12	±0.04"
	ANGLES	DIMENSIONED ± 1°	
		UNDIMENSIONED 90° ± 2°	

ACCRETION POWER

DRN BY	CHD BY	DATE	
PRP	C.P.P	30-09-2025	SCALE
			NTS

TITLE.
15kV INDOOR / OUTDOOR INSULATOR

DRG NO.
NEIS-E-15-003

REV A