

Rev.	Details	By	Date
B	Tolerance and Note modified	D.C.	06/01/2023

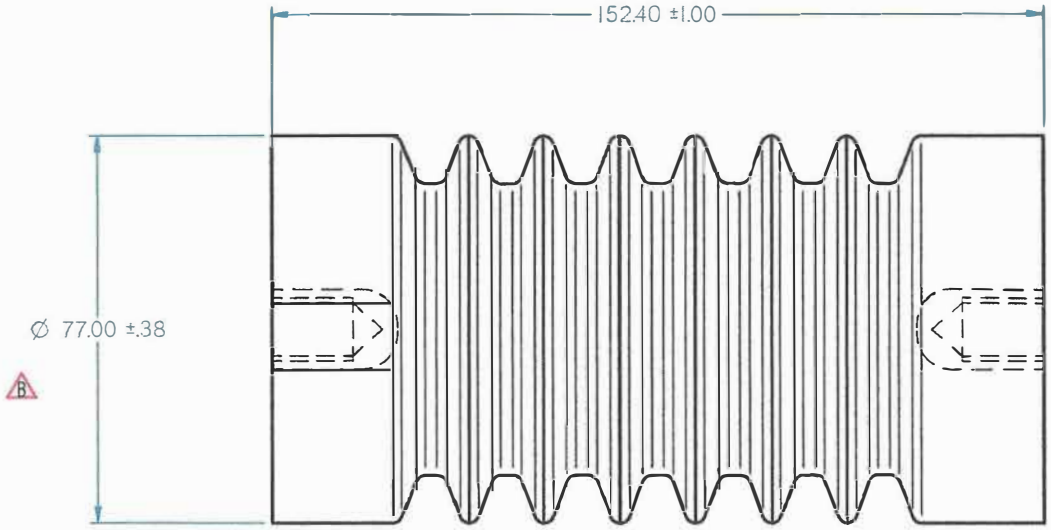

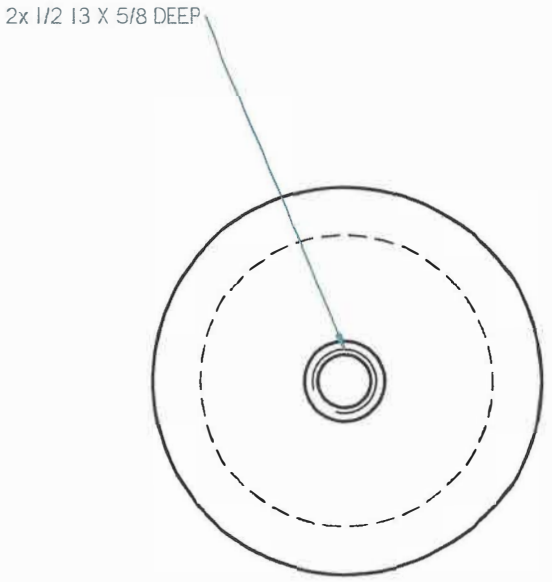

B NOTE:
MATERIAL : CYCLOALIPHATIC EPOXY RESIN
CREEPAGE : >240 MM
CANTILEVER STRENGTH : 10KN
TENSILE STRENGTH : >25KN
COMPRESSION STRENGTH : >100KN
RATED VOLTAGE : 13.5kV
ONE MINUTE DRY WITHSTAND VOLTAGE : 38kV

ACCRETION POWER