

| Drawing Ref. |
|---|
| 7000-XX |

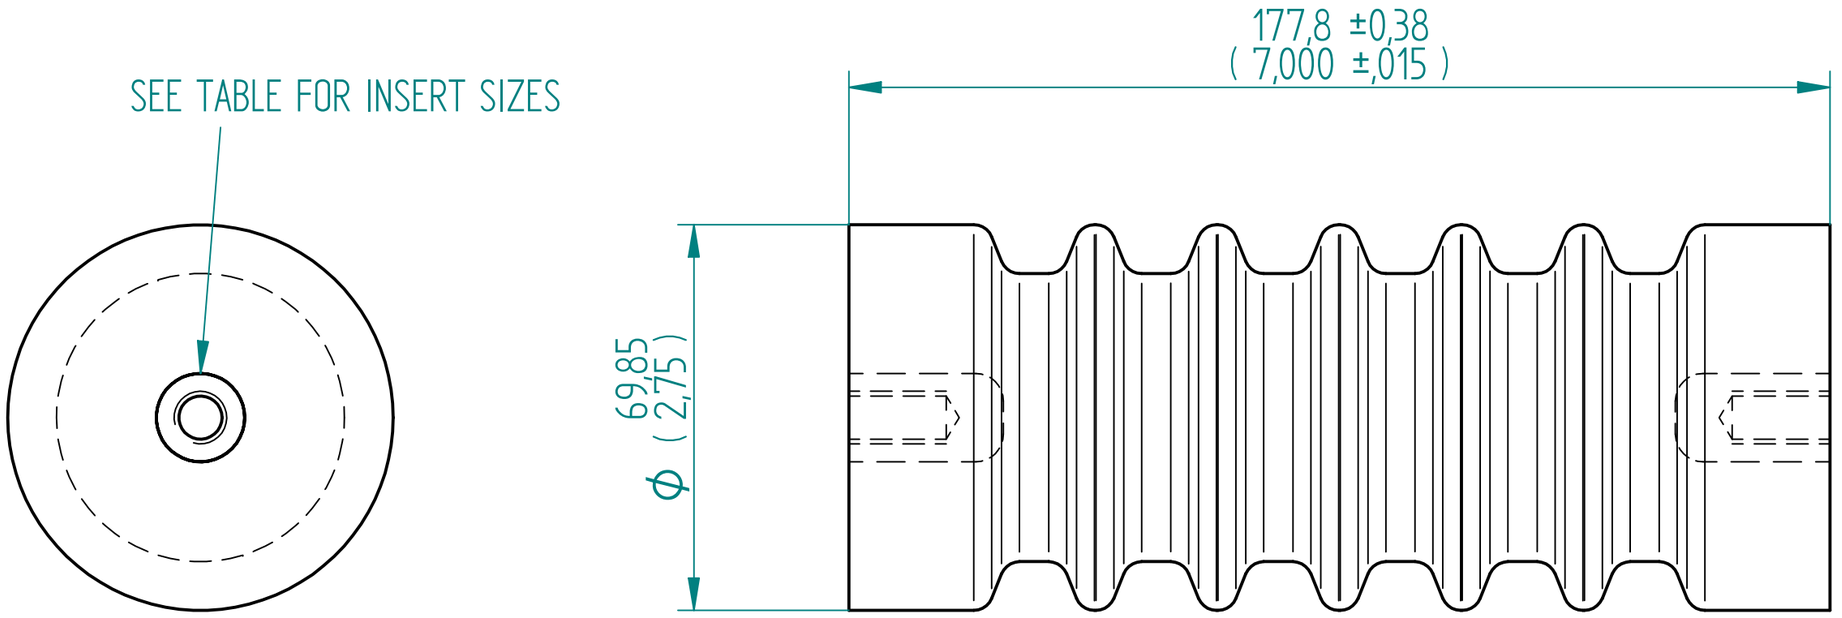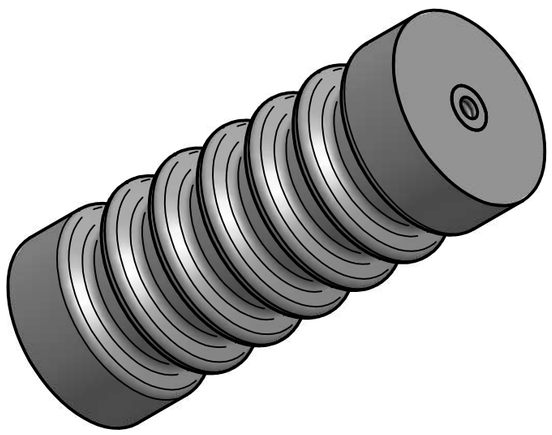

| AVAILABLE THREAD STYLE | | |
|---|---|---|
| UNC THREAD STYLE | | |
| PART NUMBER | INSERT SIZE | MATERIAL |
| N-015-0241-ASR-101 | 1/2-13-5/8 | SS 304 |
| N-015-0241-ASR-301 | 3/8-16-5/8 | SS 304 |

NOTE:
ALL DIMENSIONS ARE IN MM/INCHES
TOLERANCES ARE GIVEN IN MM ONLY
MATERIAL : RESIN EPOXY
CREEPAGE : >241.3 MM
RATED VOLTAGE : 13.5kV
ONE MINUTE DRY WITHSTAND VOLTAGE : 38kV

THIRD ANGLE

THIS DRAWING IS PROPERTY OF ACCRETION POWER AND UNAUTHORISED USE OF THERE OF BY COPYING ANY PARTY WHATSOVER IS STRICTLY PROHIBITED

| STANDARD TOLERANCES UNLESS OTHERWISE SPECIFIED | | | |
|---|---|---|---|
| LINEAR DIMENSION | 0.5 UP TO 3 | ±0.1 |
| | OVER 3 UP TO 6 | ±0.5 |
| | OVER 6 UP TO 30 | ±1 |
| | OVER 30 UP TO 120 | ±1.5 |
| | OVER 120 UP TO 400 | ±2.5 |
| | OVER 400 UP TO 1000 | ±4 |
| HOLE DIAMETER | 1 UP TO 6 | ±0.5 |
| | OVER 6 UP TO 12 | ±0.5 |
| | OVER 12 | ±1 |
| ANGLES | DIMENSIONED ± 1° | |
| | UNDIMENSIONED 90° ± 2° | |

ACCRETION POWER

| DRN BY | CHD BY | DATE | |
|---|---|---|---|
| AKD | C.P.P | 23.12.2024 | SCALE |
| | | | NTS |

TITLE.
13.5kV SUPPORT INSULATOR

| DRG NO. | |
|---|---|
| NEIS-13.5-003 | |
| REV | A |