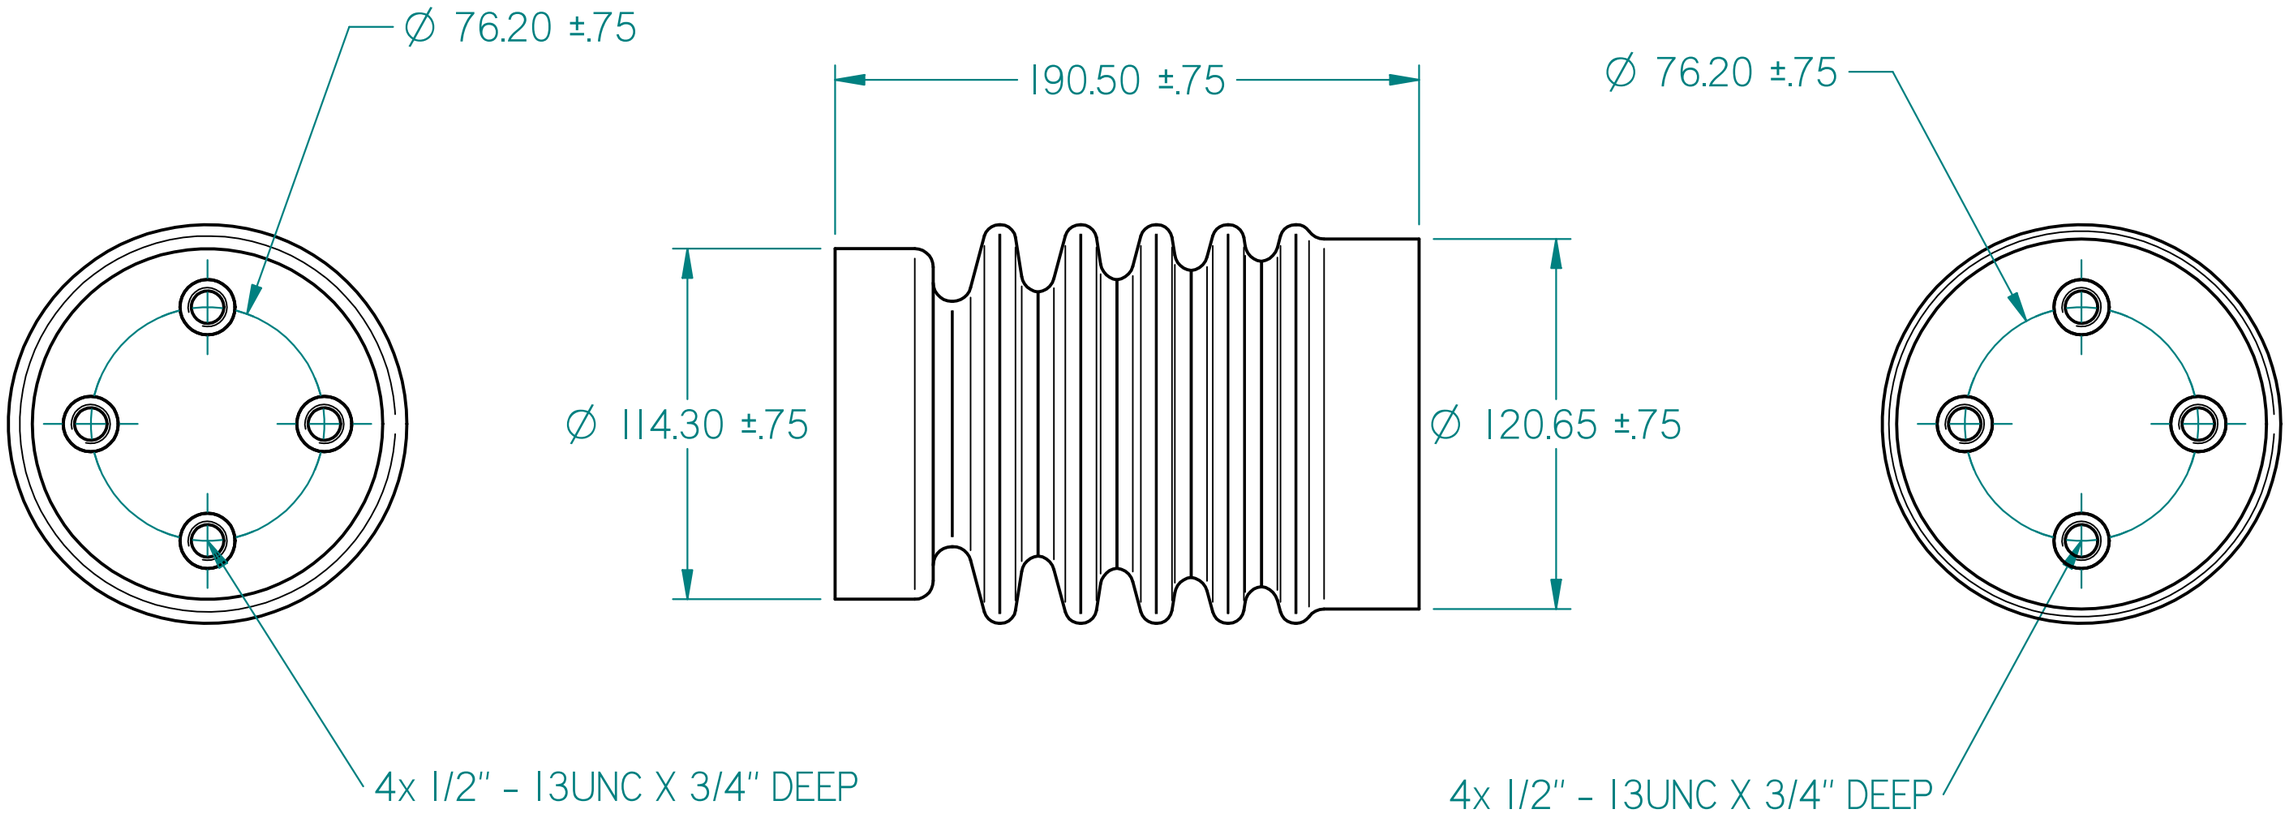


NOTE:

1. MATERIAL : EPOXY RESIN
2. RATED VOLTAGE : 20kV
3. CREEPAGE : >295MM
4. 110kV BIL

-FOR "BIL" RATINGS 95kV AND HIGHER, ALL INSERT CONFIGURATIONS WITH 3 OR MORE INSERTS ON EITHER END, WILL BE INTERNALLY CONNECTED (COMMON), ALLOWING FOR SELECTIVE APPLICATIONS.
-BREAK ALL SHARPS UNLESS OTHERWISE NOTED

THIRD ANGLE

STANDARD TOLERANCES UNLESS OTHERWISE SPECIFIED			
	LINEAR DIMENSION	0.5 UP TO 3	±0.1
		OVER 3 UP TO 6	±0.1
		OVER 6 UP TO 30	±0.2
		OVER 30 UP TO 120	±0.3
		OVER 120 UP TO 400	±0.5
		OVER 400 UP TO 1000	±0.8
	HOLE DIAMETER	1 UP TO 6	±0.1
		OVER 6 UP TO 12	±0.1
		OVER 12	±0.2
	ANGLES	DIMENSIONED ± 1°	
		UNDIMENSIONED 90° ± 2°	

ACCRETION POWER

TITLE
20kV INDOOR / OUTDOOR INSULATOR

DRG NO.

REV