
Drawing Ref.
5855-35



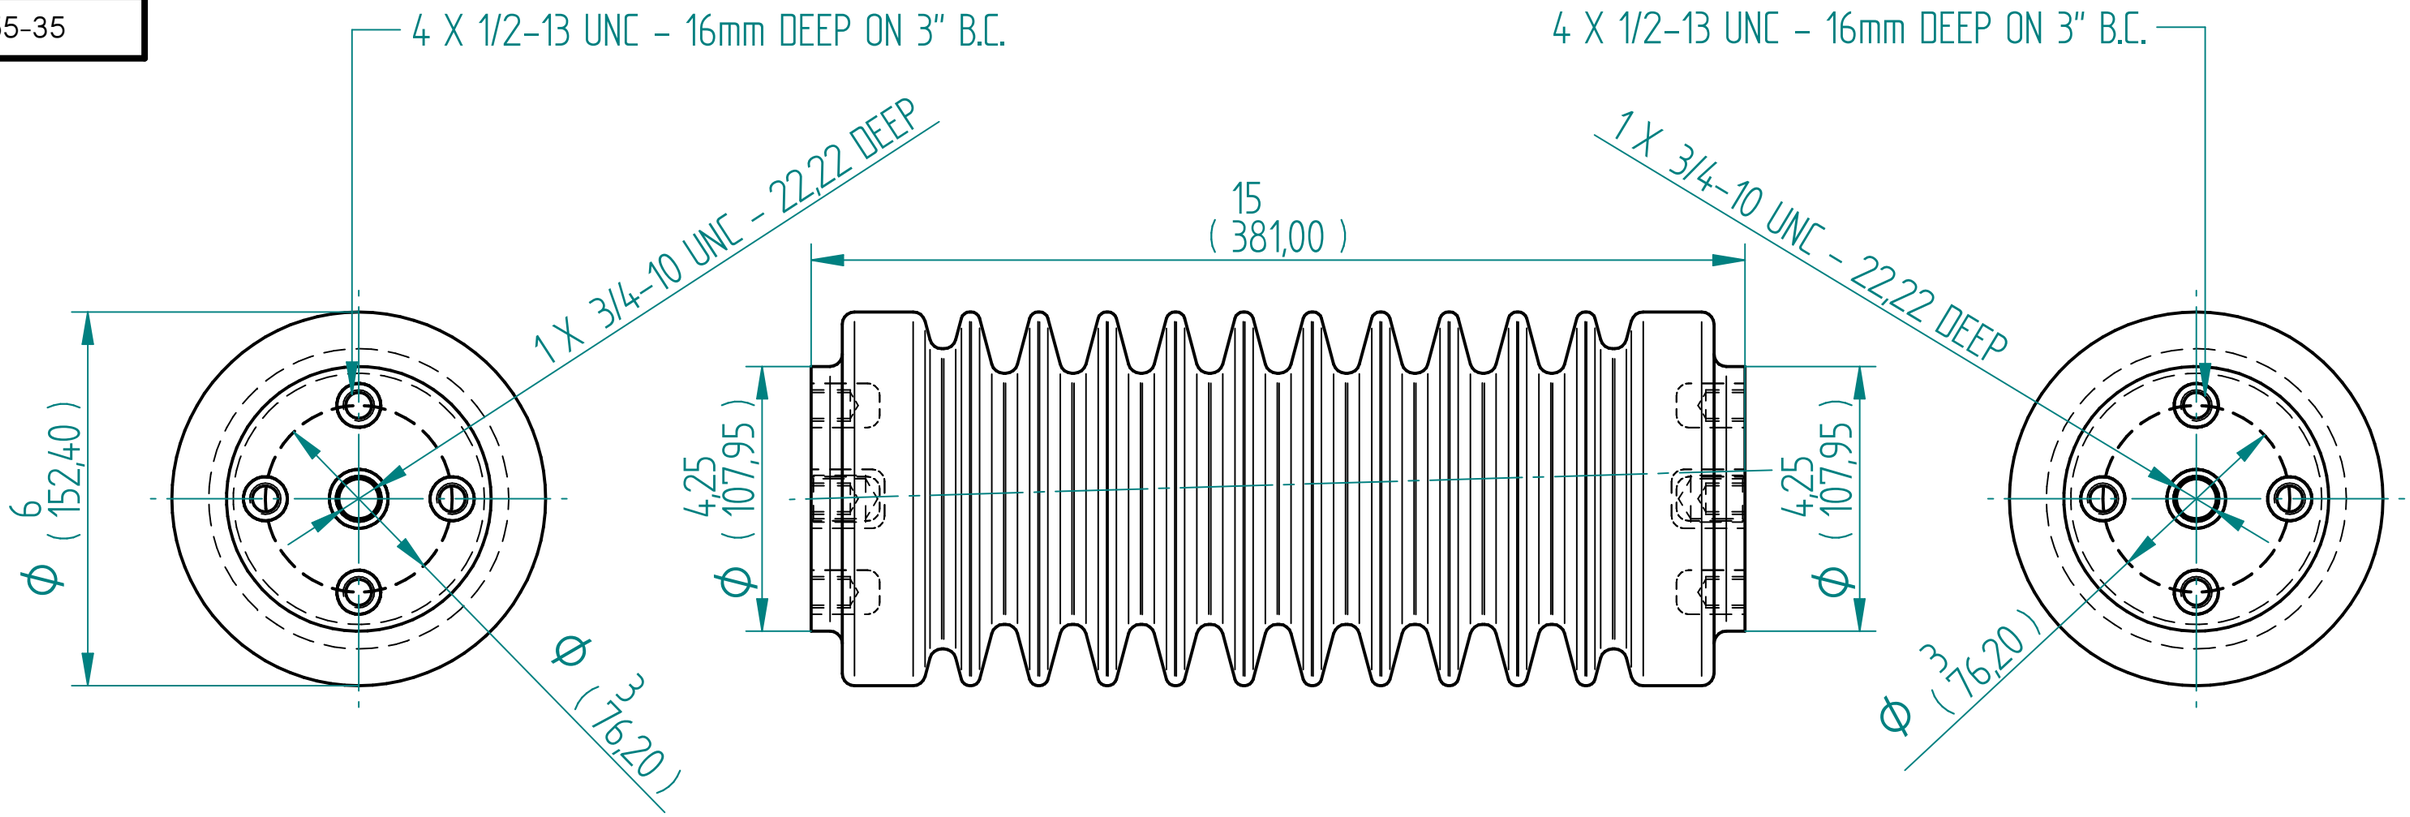

NOTE:

1. ALL DIMENSIONS ARE IN INCHES/MM
2. RATED VOLTAGE: 34.5 KV
3. BIL: 200KV
4. MATERIAL : EPOXY RESIN
5. UNIFORM STRENGTH SWITCH AND BUS INSULATORS ARE TESTED IN ACCORDANCE WITH ANSI C29.1-1988
6. THE NO. OF RIBS/RIB PATTERNS CAN BE CHANGE ACCORDING TO THE CAPACITY/APPLICATION OF THE INSULATOR.
7. CANTILEVER STRENGTH: 1250 LB
8. CREEPAGE: > 720mm
9. FOR "BIL" RATINGS 95kV AND HIGHER, ALL INSERT CONFIGURATIONS WITH 3 OR MORE INSERTS ON EITHER END, WILL BE INTERNALLY CONNECTED (COMMON), ALLOWING FOR SELECTIVE APPLICATIONS.
10. BREAK ALL SHARPS UNLESS OTHERWISE NOTED

THIRD ANGLE

THIS DRAWING IS PROPERTY OF ACCRETION POWER AND UNAUTHORISED USE OF THERE OF BY COPYING ANY PARTY WHATSOVER IS STRICTLY PROHIBITED

STANDARD TOLERANCES UNLESS OTHERWISE SPECIFIED		
LINEAR DIMENSION	0.5 UP TO 3	± 0.1
	OVER 3 UP TO 6	± 0.5
	OVER 6 UP TO 30	± 1
	OVER 30 UP TO 120	± 1.5
	OVER 120 UP TO 400	± 2.5
	OVER 400 UP TO 1000	± 4
HOLE DIAMETER	1 UP TO 6	± 0.5
	OVER 6 UP TO 12	± 0.5
	OVER 12	± 1
ANGLES	DIMENSIONED ± 1°	
	UNDIMENSIONED 90° ± 2°	

ACCRETION POWER

DRN BY	CHD BY	DATE	
AKD	C.P.P	22.12.2025	SCALE
			NTS

TITLE.
15" - 35KV Support Insulator

DRG NO.
NEIS-E-35-003

REV A