


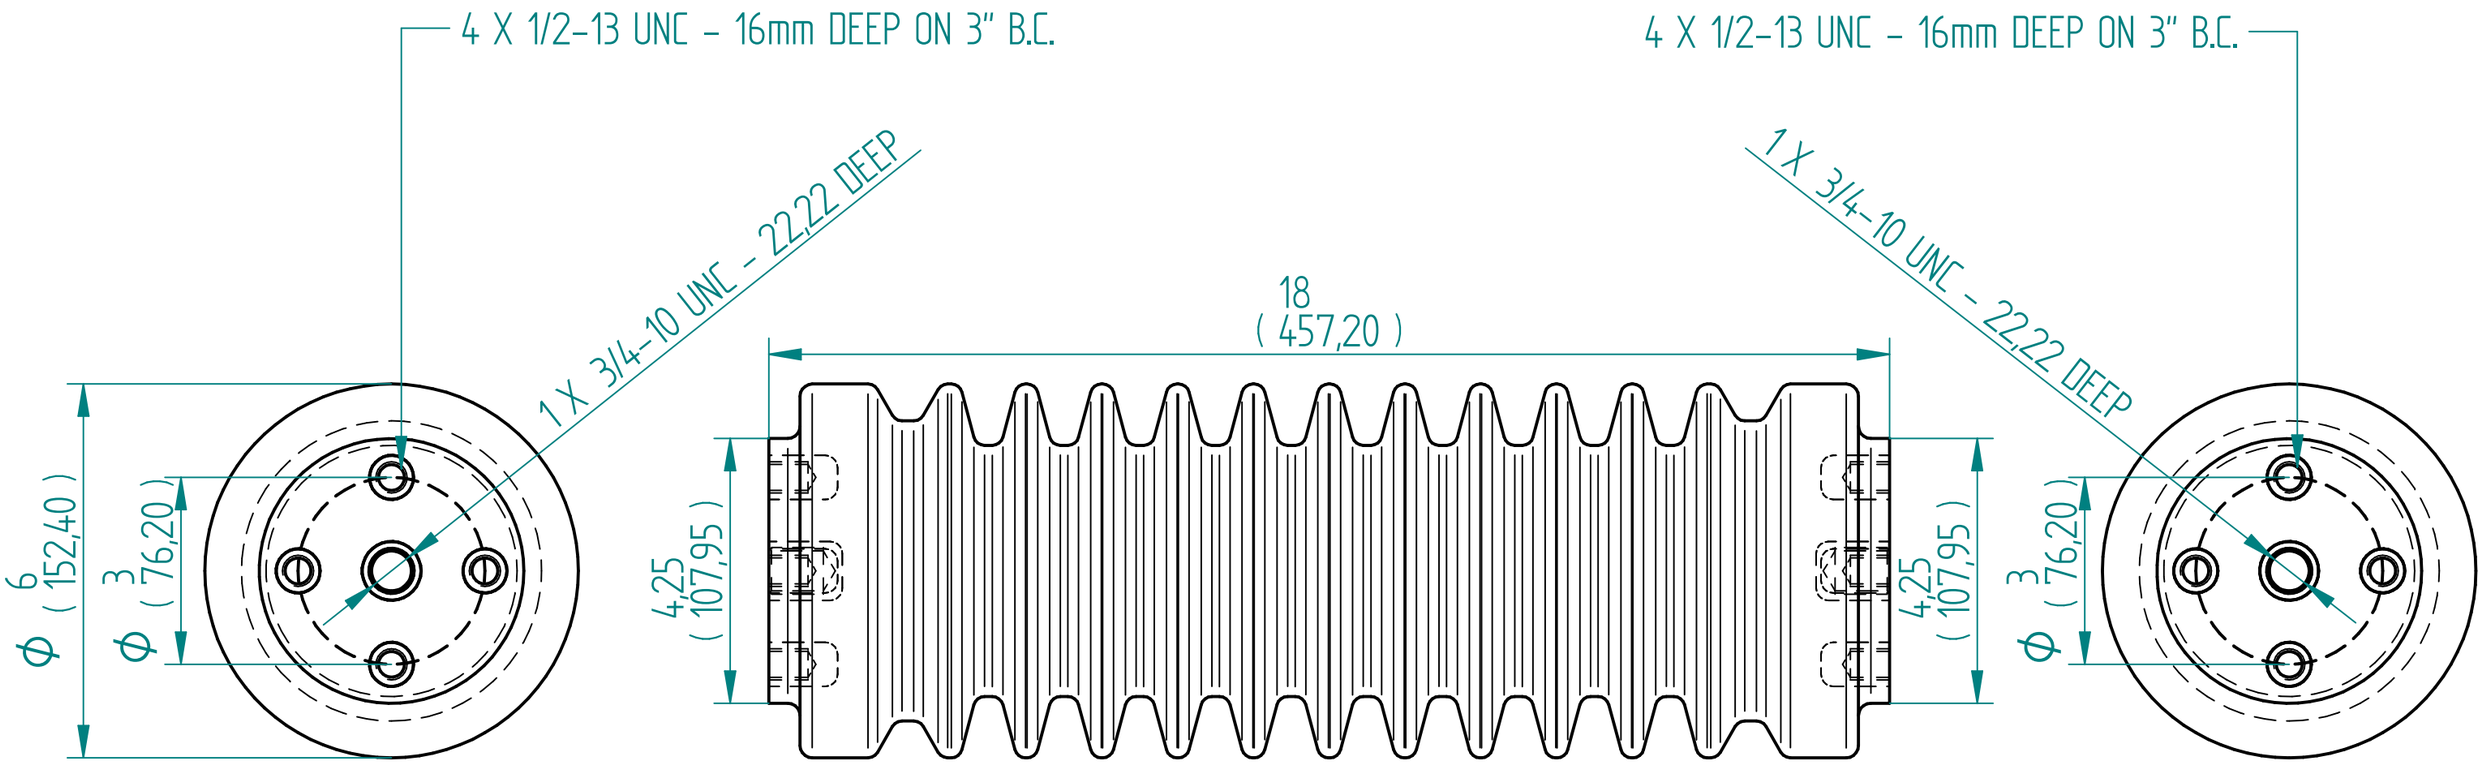


NOTE:

1. ALL DIMENSIONS ARE IN INCHES/MM
2. RATED VOLTAGE: 75KV
3. BIL: 300KV
4. MATERIAL : EPOXY RESIN
5. UNIFORM STRENGTH SWITCH AND BUS INSULATORS ARE TESTED IN ACCORDANCE WITH ANSI C29.1-1988
6. THE NO. OF RIBS/RIB PATTERNS CAN BE CHANGE ACCORDING TO THE CAPACITY/APPLICATION OF THE INSULATOR.
7. CANTILEVER STRENGTH: 1200 LB
8. CREEPAGE: > 800mm
9. FOR "BIL" RATINGS 95kV AND HIGHER, ALL INSERT CONFIGURATIONS WITH 3 OR MORE INSERTS ON EITHER END, WILL BE INTERNALLY CONNECTED (COMMON), ALLOWING FOR SELECTIVE APPLICATIONS.
10. BREAK ALL SHARPS UNLESS OTHERWISE NOTED

THIRD ANGLE

THIS DRAWING IS PROPERTY OF ACCRETION POWER AND UNAUTHORISED USE OF THERE OF BY COPYING ANY PARTY WHATSOVER IS STRICTLY PROHIBITED

| STANDARD TOLERANCES UNLESS OTHERWISE SPECIFIED | | | |
|---|---|---|---|
| | LINEAR DIMENSION | 0.5 UP TO 3 | ± 0.1 |
| | | OVER 3 UP TO 6 | ± 0.5 |
| | | OVER 6 UP TO 30 | ± 1 |
| | | OVER 30 UP TO 120 | ± 1.5 |
| | | OVER 120 UP TO 400 | ± 2.5 |
| | | OVER 400 UP TO 1000 | ± 4 |
| | HOLE DIAMETER | 1 UP TO 6 | ± 0.5 |
| | | OVER 6 UP TO 12 | ± 0.5 |
| | | OVER 12 | ± 1 |
| | ANGLES | DIMENSIONED ± 1° | |
| | | UNDIMENSIONED 90° ± 2° | |

ACCRETION POWER

| DRN BY | CHD BY | DATE | |
|---|---|---|---|
| AKD | C.P.P | 24.12.2025 | SCALE |
| | | | NTS |

TITLE.
18" - 75 KV Support Insulator

DRG NO.
NEIS-E-75-001

REV A