
Project Name _____ **Qty** _____

Type _____ **Catalog / Part Number** _____




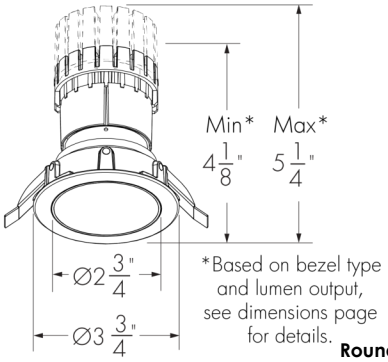

Round trim

(Deep decorative bezel shown with 1 in ceiling springs)

Round trim ceiling cutout: Ø3.25 in

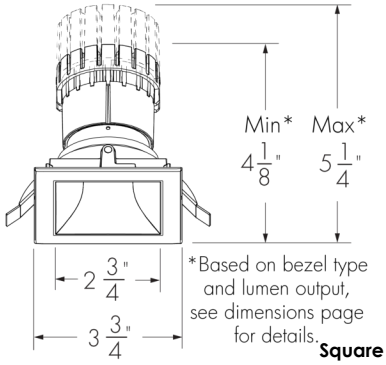

Square trim

(Deep decorative bezel shown with 1 in ceiling springs)

Square trim ceiling cutout: 3.25 in x 3.25 in

Photometric Summary


Based on Wide Faceted Reflector (nominal 60°), 4000K, CRI 90+

Nominal output [lm]	Delivered output [lm][1]	Non-insulated ceiling		Insulated ceiling	
		Power (120V) [W]	Efficacy [lm/W]	Power (120V) [W]	Efficacy [lm/W]
700	666	8.5	78	6.5	102
1000	860	10	86	8	108
1300	1,193	13	92	11	108
2000	1,859	20	93	18	103
3000	2,774	30	92	N/A	N/A


1. Consult website for latest IES files.

2. Photometric performance is measured in compliance with IESNA LM-79-24.

Optics

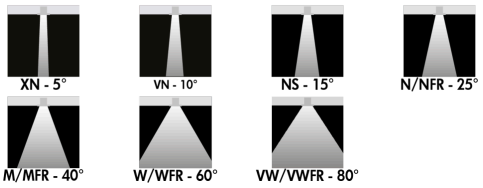

Color and Color Temperature

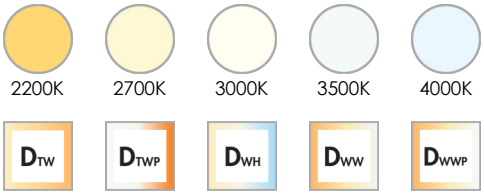

Color Rendering

CRI 80+ CRI 90+ CRI 95+

Description

The Lumencore Recessed Nano Downlight is a high-performance LED downlight for ceiling applications. Available in an array of trims and finishes, outputs, optics, color renderings, accessories, and a WET IP54 option, these luminaires are here to outperform. The Lumencore Recessed Nano Downlight possesses a previously unseen lifespan, is quick to install, and can be used with a number of different control options.

Physical

Cutout	**R:** Round, **S:** Square
Decorative Bezel	**SB:** Standard, **MB:** Mid/Semi Recess, **DB:** Deep Recess, **DR:** Deep Rollover
Trim	**RD:** Round, **SR:** Square Trim with Round Hole, **TLR:** Trimless Round, **SQ:** Square, **TLS:** Trimless Square
Ceiling Thickness	**1:** 0.04 in to 1 in Ceiling Thickness **2:** 1.05 in to 2 in Ceiling Thickness
Housing Material	Aluminum
TIR Optics Material	Clear polycarbonate
Reflector Material	Aluminum
Weight	3 lbs with RM installation type, 4.2 lbs with NC installation type, 7.2 lbs with PC, IC, IC/AT and RMR installation types (Weights are approximate based on the heaviest fixture configuration) Please consult factory if exact fixture weight is needed

LMPG Inc. reserves the right to make changes to this product at any time without prior notice and such modification shall be effective immediately.
2026.04.15 Copyright © 2026 LMPG Inc.
JC- R22

Controls

ON/OFF | 0-10V | PRO 0-10V | PH | PPH | PHB | LUTRON | DALI | PRO DALI | DALIT8 | DMXrdm | lumentalk

Ceiling Cutout Shapes



R - Round



S - Square

Decorative Bezels (Round Trim)




SB - Standard | **MB -** Mid / semi recess | **DB -** Deep recess | **DR -** Deep rolled over

Decorative Bezels (Square Trim)



SB - Standard | **MB -** Mid / semi recess | **DB -** Deep recess | **DR -** Deep rolled over

Standard Finishes - Decorative Bezels

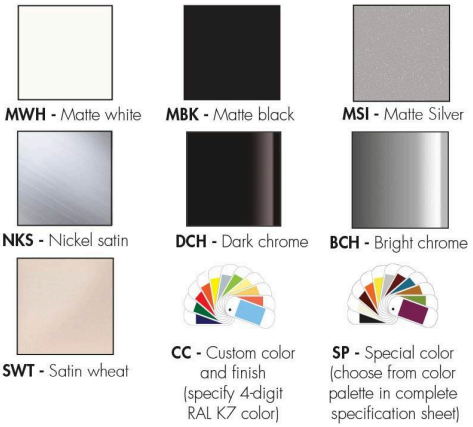

MWH - Matte white | **MBK -** Matte black | **MSI -** Matte Silver


NKS - Nickel satin | **DCH -** Dark chrome | **BCH -** Bright chrome

SWT - Satin wheat

CC - Custom color and finish (specify 4-digit RAL K7 color)

SP - Special color (choose from color palette in complete specification sheet)

Trim Shapes

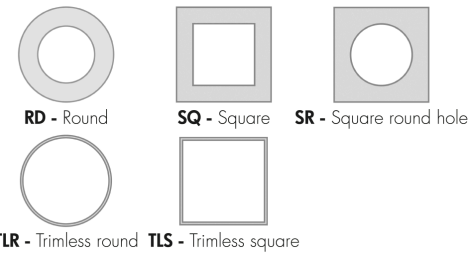

RD - Round | **SQ -** Square | **SR -** Square round hole

TLR - Trimless round | **TLS -** Trimless square


Ceiling Space Requirements (Length x Width x Height)	Up to 15 in x 8 in x 12 in with RM installation type, Up to 15 in x 9 in x 12 in with NC installation type Up to 18 in x 15 in x 9 in with PC/IC/ICAT/RMR installation types (Dimensions will vary by output and color rendering, refer to Ceiling Requirements table for details.)

Features

Output (Nominal Lumens)	**L07:** 700 lm, **L10:** 1000 lm, **L13:** 1300 lm, **L20:** 2000 lm, **L30:** 3000 lm
Color and Color Temperature	**22K:** 2200K **27K:** 2700K **30K:** 3000K **35K:** 3500K **40K:** 4000K **DTW:** Dim to Warm **DTWP:** Dim to Warm Plus **DWH:** Dynamic White **DWW:** Dynamic Warm White **DWWP:** Dynamic Warm White Plus
Optics (Nominal Distribution)	**XN:** Extra Narrow Spot Distribution 5° **VN:** Very Narrow Spot Distribution 10° **NS:** Narrow Spot Distribution 15° **N:** Narrow Distribution 25° **NFR:** Narrow Faceted Reflector 25° **M:** Medium 40° **MFR:** Medium Faceted Reflector 40° **W:** Wide 60° **WFR:** Wide Faceted Reflector 60° **VW:** Very Wide 80° **VWFR:** Very Wide Faceted Reflector 80°
Decorative Bezel Finish	**MWH:** Matte White **MBK:** Matte Black **MSI:** Matte Silver **NKS:** Nickel Satin **DCH:** Dark Chrome **BCH:** Bright Chrome **SWT:** Satin Wheat **CC:** Custom Color Trim (Specify 4-Digit RAL K7 Color) **SP:** Special Color (Choose From standard Point Source Color Palette)
Trim Finish	**MWH:** Matte White **MBK:** Matte Black **MSI:** Matte Silver **NKS:** Nickel Satin **CC:** Custom Color Trim (Specify 4-Digit RAL K7 Color) **SP:** Special Color (Choose From standard Point Source Color Palette)

LMPG Inc. reserves the right to make changes to this product at any time without prior notice and such modification shall be effective immediately.
2026.04.15 Copyright © 2026 LMPG Inc.
JC- R22


Standard Finishes for Trim



MWH - Matte white



MBK - Matte black



MSI - Matte Silver



NKS - Nickel satin



CC - Custom color and finish (specify 4-digit RAL K7 color)



SP - Special color (choose from standard Point Source color palette)

Options



Emergency battery backup



IP54 rating suitable for wet locations

Ratings

IP20

IP54

Wet Location

Lumencycle™ Program



Certifications











Installation Type	**RM:** Remodel Non-Insulated Ceiling (Plenum Rated in Accordance to UL 2043 & CAN/ULC-S142) **NC:** New Construction Non-Insulated Ceiling (Plenum Rated in Accordance to UL 2043 & CAN/ULC-S142) **PC:** Plenum Non-Insulated Ceiling (Enclosed Box) **IC:** New Construction Insulated Ceiling (Enclosed Box) **IC/AT:** New Construction Insulated Ceiling (Chicago Plenum/airtight, enclosed box) **RMR:** Remote Recessed Insulated Ceiling/Plenum (enclosed box)
Options	**EBB:** Emergency Battery Backup with Hanger Bar (Bodine BSL17C-C2) **EBI:** Emergency Battery Backup with Hanger Bar (Iota ILB-CP07-A TBTS) **WET:** IP54 rating suitable for wet locations. For IP55 Shower Rated "Dead Front" applications see Lumencore Nano Shower Rated specification sheet
Certifications	UL compliant (this luminaire is listed & labeled for such use in accordance with UL2043 & CAN/ULC-S142), UL Wet Location (WET option only), ENERGY STAR®, RoHS
Warranty	5-year limited warranty

Electrical and Control

Voltage	**120:** 120 Volts, **277:** 277 Volts, **347:** 347 Volts
Wattage Range	8.5W to 30W (wattage will vary based on voltage, output, color temperature, color rendering, optic, control and installation type, refer to Power Consumption table for details)
Control	**NO:** On/Off Control **NO3:** On/Off Control 347V **DAMC:** Standard 0-10V Dimming 1% Linear Curve **DA1:** Standard 0-10V Dimming 1% Linear Curve **DA2:** Standard 1-10V Dimming 1% Logarithmic Curve **DA3:** Standard 0-10V Dimming 1% Linear Curve (347V) **PDA1:** Professional 0-10V Dimming 0.1% Linear Curve **PDA2:** Professional 0-10V Dimming 0.1% Logarithmic Curve **PH:** Phase Dimming **PPH:** Phase Dimming 1% **PHB:** Pro Phase Dimming ERP PHB Series **ESP:** Lutron® Hi-lume Premier 0.1% EcoSystem® PEQ0 Soft-on/Fade-to-Black **SDALI1:** Standard DALI Dimming 1% Linear Curve **SDALI2:** Standard DALI Dimming 1% Logarithmic Curve **DALI1:** Professional DALI Dimming 0.1% Linear Curve **DALI2:** Professional DALI Dimming 0.1% Logarithmic Curve **DALIT8:** DALI-2 T8 Enabled Dimming 1% **DMX/RDM:** DMX/RDM Enabled Dimming 1% **LT:** Lumentalk Enabled Dimming

Performance

Maximum Delivered Output	Up to 2,868 lm (Very Wide Faceted Reflector optic 80°, 4000K, CRI 80)
Maximum Delivered Intensity	Up to 31,473 cd (Extra Narrow Spot optic 5°, 4000K, CRI 80)

LMPG Inc. reserves the right to make changes to this product at any time without prior notice and such modification shall be effective immediately.
2026.04.15 Copyright © 2026 LMPG Inc.
JC- R22

Color Consistency	2 SDCM, 3 SDCM (XN optic only)
Color Rendering	**80:** CRI 80+, **90:** CRI 90+, **95:** CRI 95+
Lumen Maintenance	L95 55,000 hrs (Ta 25 °C) L70 225,000 hrs (Ta 25 °C)

Environmental

Ingress Protection Rating	IP20, IP54 (with CL, SL or PD accessory and WET option specified)
Environment	Damp location rating (interior applications only) Wet location rating (with CL, SL or PD accessory and WET option only)
Operating Temperature (Ceiling Cavity Ambient Temperature)	-4 °F to 104 °F (DA1, DA2, DA3, PDA1, PDA2, SDALI1, SDALI2, DALI1, DALI2, DALIT8, LT, DMX/RDM, PH and PPH control options), 14 °F to 104 °F (NO control option), 32 °F to 104 °F (NO3, ESP control options and EBB and EBI options)

Accessories (Order Separately)

Control Systems	Pharos® Designer Lighting Control Kit (PHAROS), Pharos® Expert Control Kit (EXPERT)
Diagnostic and Addressing Tools	LumenID (LID)

Important

Virtual Patent Marking Notice

This website (https://www.lmpg.com/patents-trademarks) is provided to satisfy the virtual patent marking provisions of applicable jurisdictions. Some products listed may be covered by additional patents not referenced here.

Lumencycle™ Program


Lumencycle is a comprehensive program designed to maximize the life of Lumenpulse fixtures while preserving their performance, quality, and design intent. Built around three pillars—Repair, Restore, and Recycle—the program provides clear pathways to maintain existing installations, restore fixtures, and responsibly manage them at end of life. For full program details, visit https://www.lumenpulse.com/lumencycle.


LMPG Inc. reserves the right to make changes to this product at any time without prior notice and such modification shall be effective immediately.
2026.04.15 Copyright © 2026 LMPG Inc.
JC- R22

Photometric Information

XN - Extra Narrow Spot (Nominal 5°), 4000K


Nominal output [lm]	Delivered output [lm]†	
	CR80	CR90
700	712*	641






VN - Very Narrow Spot (Nominal 10°), 4000K


Nominal output [lm]	Delivered output [lm]†	
	CR80	CR90
700	736	662
1000	1,051	946
1300	1,366*	1,229






NS - Narrow Spot (Nominal 15°), 4000K


Nominal output [lm]	Delivered output [lm]†	
	CR80/90	CR95
700	696	626
1000	916	824
1300	1,247	1,122






N - Narrow (Nominal 25°), 4000K


Nominal output [lm]	Delivered output [lm]†	
	CR80/90	CR95
700	698	628
1000	918	826
1300	1,250	1,125






NFR - Narrow Faceted Reflector (Nominal 25°), 4000K


Nominal output [lm]	Delivered output [lm]†	
	CR80/90	CR95
700	689	620
1000	907	816
1300	1,235	1,112
2000	1,930*	N/A






M - Medium (Nominal 40°), 4000K


Nominal output [lm]	Delivered output [lm]†	
	CR80/90	CR95
700	572	515
1000	739	665
1300	1,025	922
2000	1,597	1,437
3000	2,383*	N/A






MFR - Medium Faceted Reflector (Nominal 40°), 4000K


Nominal output [lm]	Delivered output [lm]†	
	CR80/90	CR95
700	663	596
1000	856	770
1300	1,187	1,069
2000	1,850	1,665
3000	2,761*	N/A






W - Wide (Nominal 60°), 4000K


Nominal output [lm]	Delivered output [lm]†	
	CR80/90	CR95
700	598	538
1000	772	695
1300	1,071	964
2000	1,668	1,501
3000	2,490*	N/A






WFR - Wide Faceted Reflector (Nominal 60°), 4000K


Nominal output [lm]	Delivered output [lm]†	
	CR80/90	CR95
700	666	599
1000	860	774
1300	1,193	1,074
2000	1,859	1,673
3000	2,774	N/A






VW - Very Wide (Nominal 80°), 4000K

Nominal output [lm]	Delivered output [lm]†	
	CR80/90	CR95
700	620	558
1000	801	721
1300	1,111	1,000
2000	1,731	1,558
3000	2,584*	N/A







LMPG Inc. reserves the right to make changes to this product at any time without prior notice and such modification shall be effective immediately.
2026.04.15 Copyright © 2026 LMPG Inc.

VWFR - Very Wide Faceted Reflector (Nominal 80°), 4000K

Nominal output [lm]	Delivered output [lm]†	
	CR80/90	CR95
700	688	620
1000	889	800
1300	1,233	1,110
2000	1,922	1,730
3000	2,868*	N/A






Based on Standard Bezel and Round or Square trim configuration.
† Consult website for IES files. Delivered output: +/- 10% tolerance.
Consult Power consumption section for more wattage information.
*Photometric performance is measured in compliance with IESNA LM-79-24.

TM-30


CRI 80+

CRI 80 +				
CCT	CIE		TM-30	
3500K	R_a	84	84	R_f
	R_9	15	97	R_g




CRI 90+

CRI 90 +				
CCT	CIE		TM-30	
3500K	R_a	94	91	R_f
	R_9	55	98	R_g



CRI 95+


CRI 95 +				
CCT	CIE		TM-30	
3500K	R_a	97	91	R_f
	R_9	97	99	R_g



Refer to TM-30 Reference Guide for details.

LMPG Inc. reserves the right to make changes to this product at any time without prior notice and such modification shall be effective immediately.
2026.04.15 Copyright © 2026 LMPG Inc.
JC- R22

Exploded Overview - Part Selection

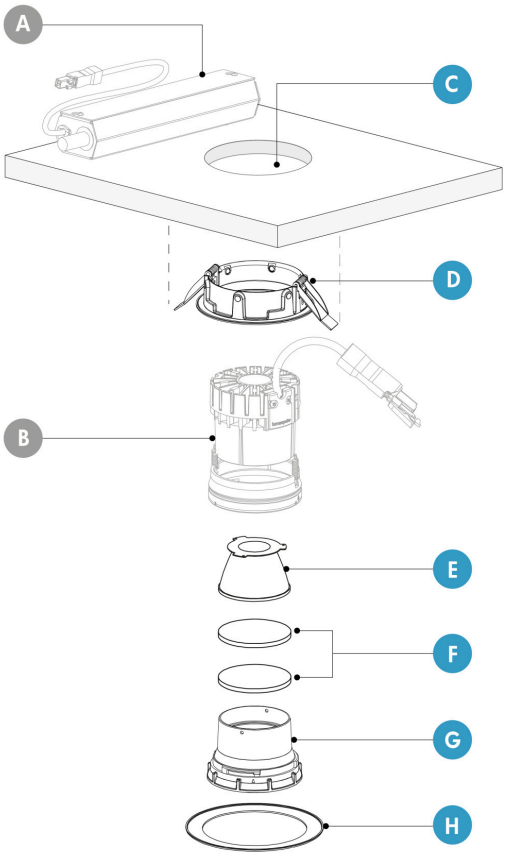

Standard parts

A - MTG kit
B - LUM Core (heatsink, universal fixing ring, LED module)
MTG: Mounting Kit
LUM: Luminaire

Customizable Parts

C - Ceiling cutout shape (round or square)
D - Ceiling mounting ring (round or square, based on ceiling cutout selection)
E - Optic*
F - Optical accessory (up to two optical accessories can be combined in the fixture, field changeable)
G - Decorative bezel**
H - Trim (round or square, based on ceiling ring selection)**

*Field changeable. Consult Interchangeable Optics section of the specification sheet for details. Consult factory for ordering details.
**Field changeable, consult installation instructions for details. Consult factory for ordering details.

LMPG Inc. reserves the right to make changes to this product at any time without prior notice and such modification shall be effective immediately.
2026.04.15 Copyright © 2026 LMPG Inc.
JC- R22

Ceiling Requirements

Ceiling Cavity Space Requirements (Length x Width x Height)


Installation type	Control	Output/Color Rendering							
		L07	L10	L13	L20		L30		L40
		CR80/90/95			CR80/90	CR95	CR80/90	CR95	CR80/90
RM	NO/PH/PHB/ESP	12"x 8"x 6" (with trim) 12"x 8"x 8" (trimless)			12"x 10"x 8"			N/A	
	DA/DAMC/PDA/SDALI/DALI/ LT/DMX-RDM	15"x 8"x 8" (with trim) 15"x 8"x 12" (trimless)						N/A	
NC	NO/PH/PHB/ESP	15"x 10"x 6" (with trim) 15"x 10"x 8" (trimless)			15"x 10"x 8"			N/A	
	DA/DAMC/PDA/SDALI/DALI/ LT/DMX-RDM	15"x 10"x 8" (with trim) 15"x 9"x 12" (trimless)						N/A	
PC/IC/ICAT/RMR	ALL	14.5"x 10"x 7"		18"x 15"x 9"		N/A		N/A	

See Installation Type section for dimensional view of keep out and/or MTG mounting kit option.
Above dimensions include any keep out requirements for proper airflow and thermal cooling.

LMPG Inc. reserves the right to make changes to this product at any time without prior notice and such modification shall be effective immediately.
2026.04.15 Copyright © 2026 LMPG Inc.


Installation Types

RM : Remodel Non-Insulated Ceiling (Plenum Rated in Accordance to UL 2043 & CAN/ULC-S142) (NO, PH, ES and ESP Controls Only)

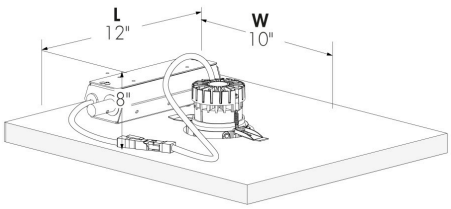


Ceiling cavity space requirements for L20 CR95 and L30 CR80/CR90 shown.

RM: Remodel Non-Insulated Ceiling (Plenum Rated in Accordance to UL 2043 & CAN/ULC-S142) (Other Controls)

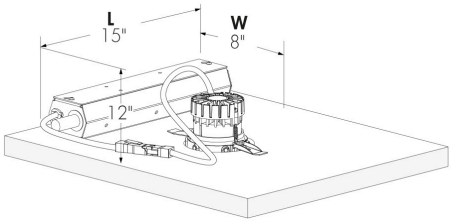


Ceiling cavity space requirements up to L20 CR95 and L30 CR80/CR90 shown, trimless version.

NC: New Construction Non-Insulated Ceiling (Plenum Rated in accordance to UL 2043 & CAN/ULC-S142) (NO, PH, ES and ESP Control Options only)

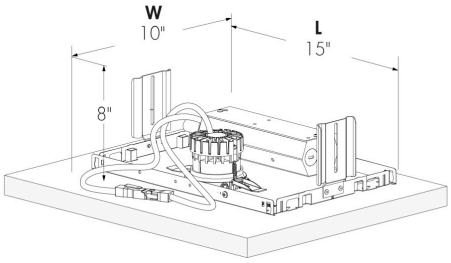


Ceiling cavity space requirements for L20 CR95 and L30 CR80/CR90 shown.

NC: New Construction Non-Insulated Ceiling (Plenum Rated In Accordance To UL 2043 & CAN/ULC-S142) (Other Controls)

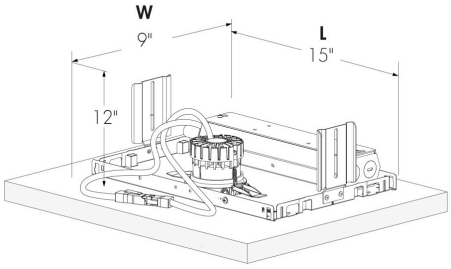

Ceiling cavity space requirements up to L20 CR95 and L30 CR80/CR90 shown, trimless version.


IC, PC, IC/AT: New Construction Insulated and Non-Insulated Ceiling (Enclosed Box)

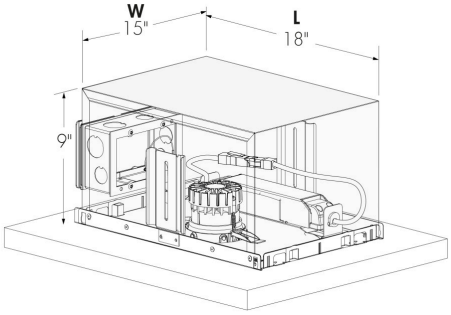

IC - New construction insulated ceiling (enclosed box)
PC - Plenum non-insulated ceiling (enclosed box)
IC/AT - New construction insulated ceiling (Chicago Plenum/airtight, enclosed box)

Ceiling cavity space requirements for L13 CR80/90/95 and L20 CR80/CR90 shown.

RMR: Remote Recessed Insulated Ceiling/Plenum (Enclosed Box)

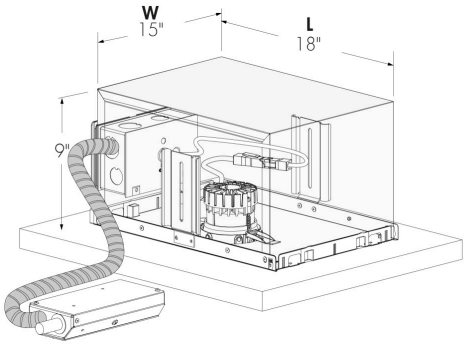

Luminaire ceiling cavity space requirements for L13 CR80/90/95 and L20 CR80/CR90 shown. Refer to remote driver box dimensions in installation instructions for space required for driver.


Remote distance is a maximum of 75 ft, consult Lumenpulse Application Engineering Team for longer remote distances.

Fixture shown for reference only. Refer to Ceiling Requirements section and installation instructions for dimensions and ceiling cutout requirements.

LMPG Inc. reserves the right to make changes to this product at any time without prior notice and such modification shall be effective immediately.
2026.04.15 Copyright © 2026 LMPG Inc.
JC- R22

Ceiling Requirements


Ceiling Cutout

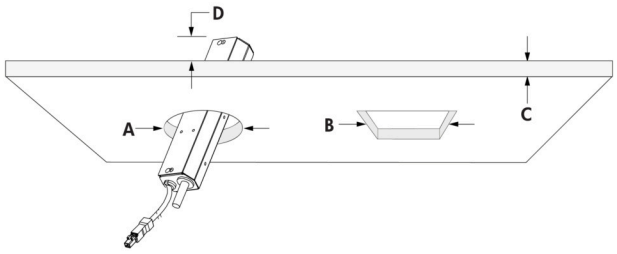

A - Ceiling cutout: Ø3.25 in
B - Ceiling cutout: 3.25 in x 3.25 in
C - Maximum ceiling thickness: 2 in
D - Minimum ceiling height: refer to Ceiling Cavity Space Requirements table


Ceiling Thickness Options

Ceiling Thickness 1

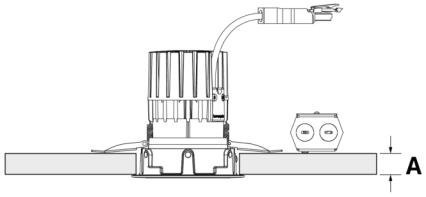

A - Ceiling thickness range: 0.04 in to 1 in

Ceiling Thickness 2

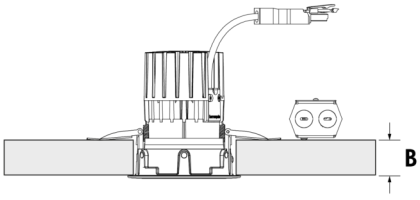

B - Ceiling thickness range: 1.05 in to 2 in


Ceiling springs are field changeable, consult installation instructions and factory for details.

LMPG Inc. reserves the right to make changes to this product at any time without prior notice and such modification shall be effective immediately.
2026.04.15 Copyright © 2026 LMPG Inc.
JC- R22

Dimensions


SB - Standard

L07, L10, L13



Front view

L20, L30*




Front view

*Also applicable to L13 for VN optic (CR80/90), L13 for NS and N optics (CR90/95), L13 for DTW and DTWP,L13 for DWH, DWW and DWWP


SB - Standard (Trimless Version)

L07, L10, L13



Front view

L20, L30*




Front view

*Also applicable to L13 for VN optic (CR80/90), L13 for NS and N optics (CR90/95), L13 for DTW and DTWP,L13 for DWH, DWW and DWWP


MB - Mid/Semi Recess

L07, L10, L13



Front view


L20, L30*



Front view

*Also applicable to L13 for VN optic (CR80/90), L13 for NS and N optics (CR90/95), L13 for DTW and DTWP,L13 for DWH, DWW and DWWP


TLR - Trimless Round



Bottom view


DB - Deep Recess
DR - Deep Rolled Over

L07, L10, L13



Front view


L20, L30*



Front view


*Also applicable to L13 for VN optic (CR80/90), L13 for NS and N optics (CR90/95), L13 for DTW and DTWP,L13 for DWH, DWW and DWWP

TLS - Trimless Square




Bottom view

RD - Round Shape, Round Trim




Bottom view

SQ - Square Shape, Square Trim



Bottom view

SR - Square Shape, Round Hole




Bottom view

Round ceiling cutout: Ø3.25 in
Square ceiling cutout: 3.25 in x 3.25 in

LMPG Inc. reserves the right to make changes to this product at any time without prior notice and such modification shall be effective immediately.
2026.04.15 Copyright © 2026 LMPG Inc.


Beam Cutoff Angle

SB - Standard Decorative Bezel




Front view

MB - Mid/Semi Recess



Front view


DB - Deep Recess
DR - Deep Rolled Over



Front view

Delivery - How it Works


Standard Shipping (1 delivery)

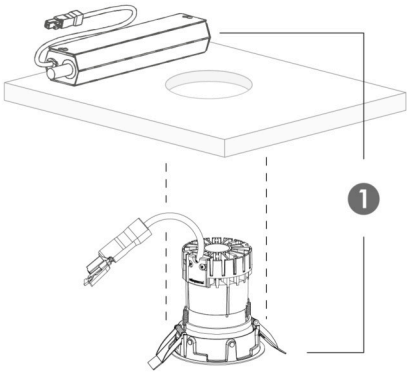

Included

1. MTG kit and complete fixture assembly

Advanced Shipping of Mounting kit (2 Separate Deliveries)

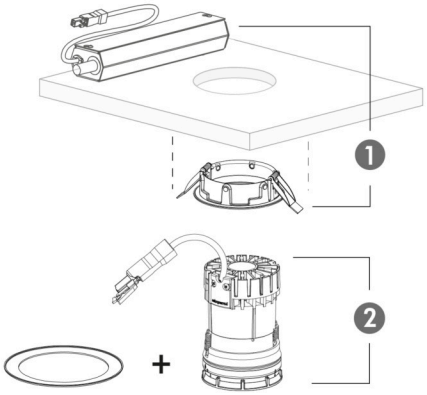

Included


1. Optional advanced delivery: MTG kit and ceiling mounting ring
2. Second delivery: LUM Core (heatsink, universal fixing ring, LED module, optic, accessories, decorative bezel) and trim

Consult factory for Advanced Shipping details.


LMPG Inc. reserves the right to make changes to this product at any time without prior notice and such modification shall be effective immediately.
2026.04.15 Copyright © 2026 LMPG Inc.
JC- R22

Ceiling Cutout Shape Options

RD - Round Ceiling Cutout



SQ - Square Ceiling Cutout



Decorative Bezel Options

RD - Compatible Round Decorative Bezels



SB - Standard



MB - Mid/semi recess



DB - Deep recess



DR - Deep rolled over

SQ - Compatible Square Decorative Bezels



SB - Standard



MB - Mid/semi recess



DB - Deep recess



DR - Deep rolled over

Standard Finishes - Decorative Bezels



MWH - Matte white



MBK - Matte black



MSI - Matte silver



NKS - Nickel satin



DCH - Dark chrome



BCH - Bright chrome



SWT - Satin wheat



CC - Custom colour*



SP - Special colour**

*Custom color: specify 4-digit RAL K7 color.
**Special color: choose one of the standard Point Source colors from the Point Source product brochure or Lumencore Cylinder specification sheets. Contact manufacturer for additional information.

LMPG Inc. reserves the right to make changes to this product at any time without prior notice and such modification shall be effective immediately.
2026.04.15 Copyright © 2026 LMPG Inc.

Trim Shape Options

RD - Compatible Round Trim Shapes



RD - Round



SR - Square trim with round hole

TLR - Trimless round

SQ - Compatible Square Trim Shapes



SQ - Square

TLS - Trimless Square

Standard Finishes - Trims



MWH - Matte white



MBK - Matte black



MSI - Matte silver



NKS - Nickel satin



CC - Custom colour*




SP - Special colour**

*Custom color: specify 4-digit RAL K7 color.
**Special color: choose one of the standard Point Source colors from the Point Source product brochure or Lumencore Cylinder specification sheets. Contact manufacturer for additional information.

LMPG Inc. reserves the right to make changes to this product at any time without prior notice and such modification shall be effective immediately.
2026.04.15 Copyright © 2026 LMPG Inc.
JC- R22

Optical Accessories

HL - Honeycomb Louver



XLVR - Concentric Ring Louver




CL - Clear Glass Lens




SL - Softening Glass Lens


PD – Prismatic Diffuser




LSN - Linear Spread Lens Narrow (1° x 40°)

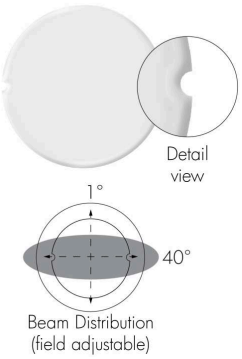

LSW - Linear Spread Lens Wide (1° x 60°)

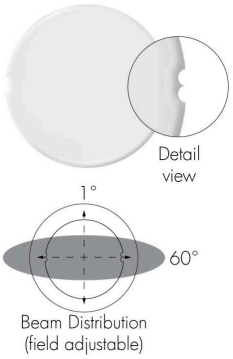


BW1 - Beam Widening Lens (+10°)




Refer to Beam Widening Lens table for beam distribution based on optic installed in the fixture.

BW2 - Beam Widening Lens (+20°)



Refer to Beam Widening Lens table for beam distribution based on optic installed in the fixture.

BW3 - Beam widening lens (+30°)




Refer to Beam Widening Lens table for beam distribution based on optic installed in the fixture.


LMPG Inc. reserves the right to make changes to this product at any time without prior notice and such modification shall be effective immediately.
2026.04.15 Copyright © 2026 LMPG Inc.
JC- R22

Optical Accessories - Installation Options (Field Changeable)

One Optical Accessory Installed

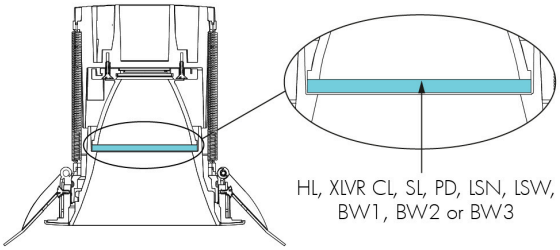

Two Optical Accessories Installed

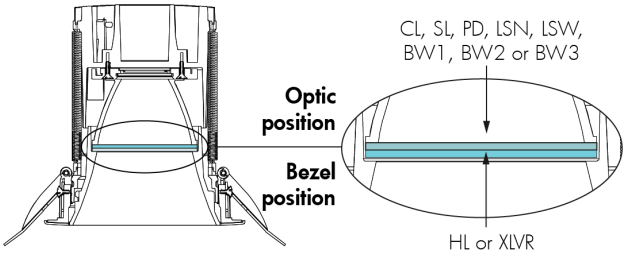

Accessories specified in the fixture code will ship from the factory in the order shown above.

LMPG Inc. reserves the right to make changes to this product at any time without prior notice and such modification shall be effective immediately.
2026.04.15 Copyright © 2026 LMPG Inc.

Optics

TIR Optic - Total Internal Reflection



Applicable to XN (5°), VN (10°), NS (15°) and N (25°) distributions.

Semi-Specular Reflector



Applicable to M (40°), W (60°) and VW (80°) distributions.

Faceted Reflector



Applicable to NFR (25°), MFR (40°), WFR (60°) and VWFR (80°) distributions.

Beam Widening Lenses

	Optic installed in fixture										
	XN 5°	**VN** 10°	**NS** 15°	**N** 25°	**NFR** 25°	**M** 40°	**MFR** 40°	**W** 60°	**WFR** 60°	**VW** 80°	**VWFR** 80°
BW1	11°	14°	21°	26°	26°	51°	51°	61°	61°	81°	81°
BW2	21°	22°	27°	31°	31°	54°	54°	63°	63°	82°	82°
BW3	30°	32°	35°	38°	38°	58°	58°	67°	67°	85°	85°

The above beam angles are nominal beam angles.
Variations in beam angles can be seen due to different LES sizes. For exact beam calculations please consult factory.
Beam widening lenses should not be used with other accessories with the nominal results above.

Interchangeable Optics

	Optic installed in fixture										
	XN 5°	**VN** 10°	**NS** 15°	**N** 25°	**NFR** 25°	**M** 40°	**MFR** 40°	**W** 60°	**WFR** 60°	**VW** 80°	**VWFR** 80°
Interchangeable optics	N/A	N/A	N NFR	NS NFR	NS N	MFR W WFR VW VWFR	M W WFR VW VWFR	M MFR WFR VW VWFR	M MFR W VW VWFR	M MFR W WFR VWFR	M MFR W WFR VW

The optic options listed above are field changeable. Consult factory and installation instructions for details.

LMPG Inc. reserves the right to make changes to this product at any time without prior notice and such modification shall be effective immediately.
2026.04.15 Copyright © 2026 LMPG Inc.

Power Consumption

Static White Color Temperatures

Power consumption [W]										
	XN (5°) - **VN** (10°)		**NS** (15°) - **N** (25°) - **NFR** (25°)				**M** (40°) - **MFR** (40°) - **W** (60°) - **WFR** (60°) - **VW** (80°) - **VWFR** (80°)			
	120 V	**277 V**	**120 V**		**277 V**		**120 V**		**277 V**	
Output [lm]	**CR80/90**		**CR80/90**	**CR95**	**CR80/90**	**CR95**	**CR80/90**	**CR95**	**CR80/90**	**CR95**
700	13	15	9.5	10	10.5	12	8.5	9	9.5	11
1000	17*	18*	13	14.5	14	16	10	13	12	15
1300	23*	24*	15	20	16	21	13	15	15	16
2000	N/A	N/A	23**	N/A	24**	N/A	20	23	21	24
3000	N/A	N/A	N/A	N/A	N/A	N/A	30	N/A	30	N/A


*Not applicable to XN optic.
**Not applicable to NS and N optics.


Dynamic Colors

Power consumption [W]				
	NFR (25°) - **M** (40°) - **MFR** (40°) - **W** (60°) - **WFR** (60°) - **VW** (80°) - **VWFR** (80°)			
	120 V		**277 V**	
Output [lm]	**DTW - DTWP**	**DWW - DWH - DWWP**	**DTW - DTWP**	**DWW - DWH - DWWP**
1000	14	N/A	15	N/A
1300	17	26	19	26

- Power consumption values are for non-insulated ceiling (RM and NC) and remote recessed insulated ceiling/plenum (RMR) installation types. For plenum ceiling (PC), new construction insulated ceiling (IC and IC/AT) installation types, remove 2 watts per fixture.
- Add 3 watts per fixture when specifying LT control option.
- Add 2 watts per fixture when specifying DMX/RDM control option.
- Add 4 watts per fixture when specifying 347V.

Control





Dimming	Control options with linear dimming curve						Control options with logarithmic dimming curve				
Dimming down to 0.1%	PDA1	ESP	DALI1				PDA2	DALI2	DALIT8		
Dimming down to 1%	DA1	DA3	DAMC	PPH	PHB	SDALI1	DA2	SDALI2	DALIT8	DMXrdm*	lumentalk


*DMX/RDM control can be programmed onsite via RDM for linear dimming curve option. Logarithmic curve is standard from factory. Consult factory for further details.

Refer to website product code for exceptions.

LMPG Inc. reserves the right to make changes to this product at any time without prior notice and such modification shall be effective immediately.
2026.04.15 Copyright © 2026 LMPG Inc.

Color and Color Temperature

Color Temperature Ranges

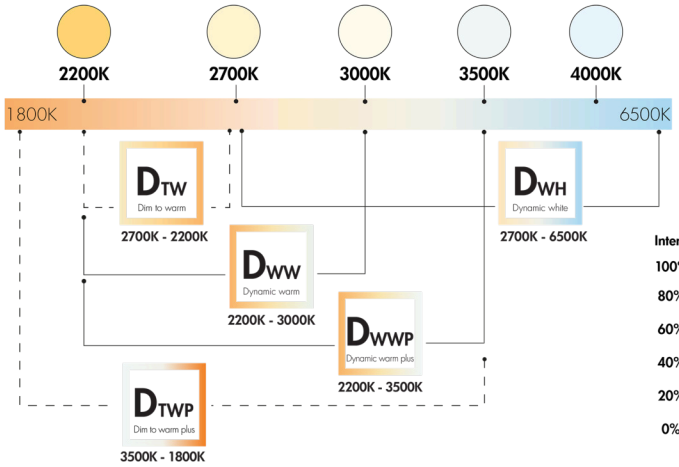



---1 channel (DTW, DTWP) Compatible with: DA1 SDALI1 SDALI2 DMXrdm lumentalk

——2 channels* (DWH, DWW, DWWP) Compatible with: DALIT8 DMXrdm lumentalk

——3 channels (DWH, DWW, DWWP) Compatible with: DALIT8 DMXrdm lumentalk

*Can be changed in the field via RDM & LT for individual CCT control.

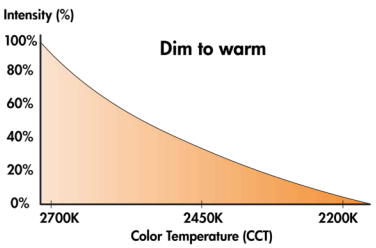


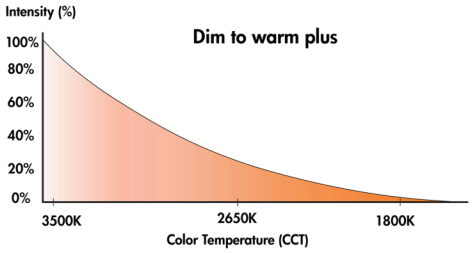

LMPG Inc. reserves the right to make changes to this product at any time without prior notice and such modification shall be effective immediately.
2026.04.15 Copyright © 2026 LMPG Inc.


Wiring Details RM: Remodel Non-Insulated Ceiling (Plenum Rated in Accordance to UL 2043 & CAN/ULC-S142)

NO And PH Controls - Wiring Detail

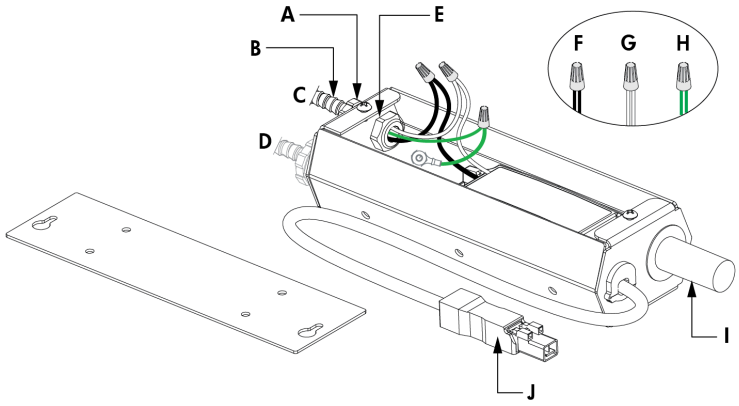


A - Conduit fitting (by others)
B - Conduit (by others)
C - Power Input
D - Optional Output
E - Locknut (by others)
F - Line
G - Neutral
H - Ground
I - Thermal protector
J - Output to luminaire

Other Controls - Wiring Detail

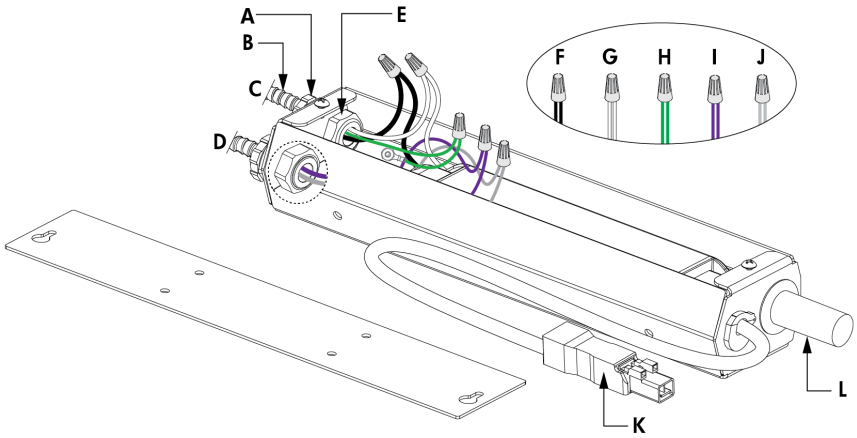

A - Conduit fitting (by others)
B - Conduit (by others)
C - Power Input
D - Data Input from Control System
E - Locknut (by others)
F - Line
G - Neutral
H - Ground
I - Data +
J - Data -
K - Output to luminaire
L - Thermal protector

Other Controls - Daisy Chain Layout Wiring Detail

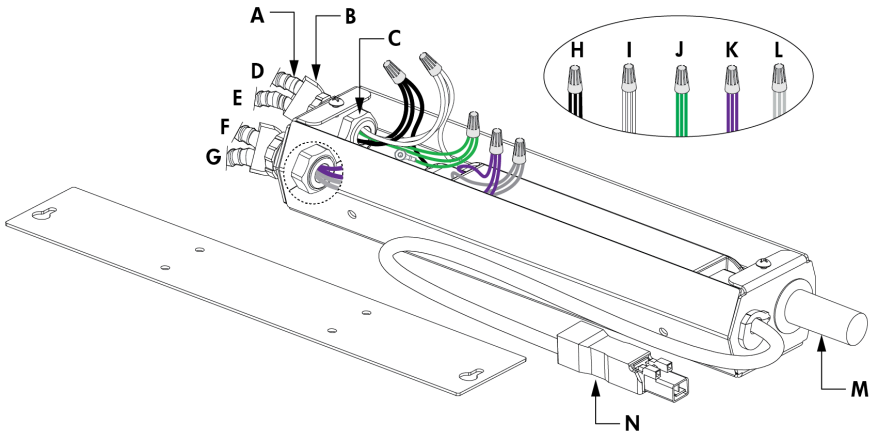


A - Conduit (by others)
B - Duplex connector (by others)
C - Locknut (by others)
D - Power Output to next luminaire
E - Power input
F - Data Output to next luminaire
G - Data Input from Control System
H - Line
I - Neutral
J - Ground
K - Data +
L - Data -
M - Thermal protector
N - Output to luminaire

Remodel driver box varies by control option. Refer to installation instructions for additional wiring details.

LMPG Inc. reserves the right to make changes to this product at any time without prior notice and such modification shall be effective immediately.
2026.04.15 Copyright © 2026 LMPG Inc.


Options

EBB - Emergency Battery Backup With Hanger Bar (Bodine BSL17C-C2)

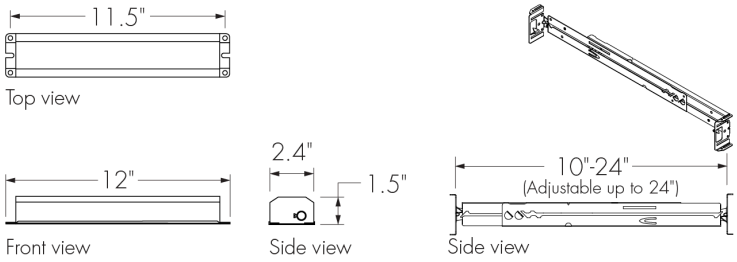

Hardware to mount the battery backup to the hanger bar is included. A test button is included. The unit comes pre-wired with 2 ft flexible conduit in and out. Refer to installation instructions for details.


EBI - Emergency Battery Backup With Hanger Bar (Iota ILB-CP07-A TBTS)

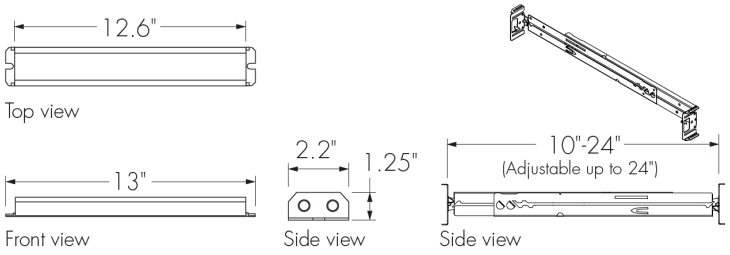

Hardware to mount the battery backup to the hanger bar is included. A test button is included. The unit comes pre-wired with 2 ft flexible conduit in and out. Refer to installation instructions for details.

Diagnostic And Addressing Tools (Order Separately)


LID - LumenID



The updated LumenID (LID) is an all-in-one diagnostic and addressing solution for both DMX/RDM and Lumentalk (LT) systems. Engineered for versatility, it streamlines commissioning and troubleshooting across protocols—no need for multiple tools. Cable option may vary; please consult factory. For complete details, refer to the LID specification sheet.


Control Systems (Order Separately)

PHAROS - Pharos® Designer Lighting Control Kit

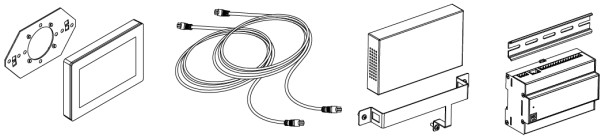

The Pharos Designer Lighting Contol Kit, available for 1 or 2 DMX universes, allows for complete control of large lighting installations.

EXPERT - Pharos® Expert Control Kit

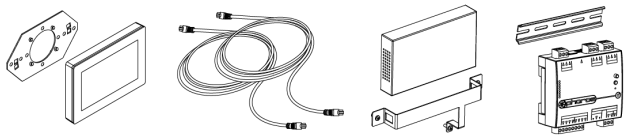

The Pharos Expert Control Kit, available for 1, 2, 4 or 6 DMX universes, allows for complete control of large lighting installations.

LMPG Inc. reserves the right to make changes to this product at any time without prior notice and such modification shall be effective immediately.
2026.04.15 Copyright © 2026 LMPG Inc.

How to Order

Housing [1]	EZ Ship	Certification	Type	Voltage	Cutout	Output (Nominal Lumens)	Color and Color Temperature	Color Rendering	Optics (Nominal Distribution)	Control [24]
LCRN Lumencore Recessed Nano - 2.75 in	**EZ** EZ Ship [2]	**A** UL/cUL **ESR** UL/cUL & ENERGY STAR® [3]	**FD** Downlight	**120** 120 Volts **277** 277 Volts **347** 347 Volts [4] [5] [6] [7] [8]	**R** Round **S** Square	**L07** 700 lm [9] **L10** 1000 lm **L13** 1300 lm **L20** 2000 lm **L30** 3000 lm [9] [10] [11]	**22K** 2200K [7] [12] [13] **27K** 2700K [13] **30K** 3000K [13] **35K** 3500K [13] **40K** 4000K [13] **DTW** Dim to Warm (2700K to 2200K) [7] [14] [15] [16] **DTWP** Dim to Warm Plus (3500K to 1800K) [7] [14] [15] [16] **DWH** Dynamic White (2700K to 6500K) [7] [15] [17] [18] **DWW** Dynamic Warm White (2200K to 3000K) [7] [15] [17] [18] **DWWP** Dynamic Warm White Plus (2200K to 3500K) [7] [15] [17] [18]	**80** CRI 80+ **90** CRI 90+ **95** CRI 95+ [7]	**XN** Extra Narrow Spot Distribution 5° [7] [19] **VN** Very Narrow Spot Distribution 10° [7] [20] **NS** Narrow Spot Distribution 15° [21] **N** Narrow Distribution 25° [21] **NFR** 25° Faceted Reflector [22] **M** Medium 40° [23] **MFR** 40° Faceted Reflector [23] **W** Wide 60° [23] **WFR** 60° Faceted Reflector [23] **VW** 80° Reflector [23] **VWFR** 80° Faceted Reflector [23]	**NO** On/Off Control [7] [25] [26] **NO3** On/Off Control 347V [4] [5] [7] [27] **DAMC** Standard 0-10V Dimming 1% Linear Curve [6] [7] [26] [28] [29] **DA1** Standard 0-10V Dimming 1% Linear Curve [26] [30] **DA2** Standard 1-10V Dimming 1% Logarithmic Curve [26] [30] **DA3** Standard 0-10V Dimming 1% Linear Curve (347V) [4] [5] [7] [27] **PDA1** Professional 0-10V Dimming 0.1% Linear Curve [26] [30] **PDA2** Professional 0-10V Dimming 0.1% Logarithmic Curve [26] [30] **PH** Phase Dimming [31] [32] **PPH** Phase Dimming 1% [5] [6] [7] [32] [33] **PHB** Pro Phase Dimming ERP PHB Series [6] [29] [34] [35] **ESP** Lutron® Hi-lume Premier 0.1% EcoSystem® PEQ0 Soft-on/Fade-to-Black [7] [26] [36] [37] **SDALI1** Standard DALI Dimming 1% Linear Curve [7] [26] **SDALI2** Standard DALI Dimming 1% Logarithmic Curve [7] [26] **DALI1** Professional DALI Dimming 0.1% Linear Curve [7] [26] **DALI2** Professional DALI Dimming 0.1% Logarithmic Curve [7] [26] **DALIT8** DALI-2 T8 Enabled Dimming 1% [5] [7] [26] [38] [39] **DMX/RDM** DMX/RDM Enabled Dimming 1% [7] [26] [40] [41] [42] **LT** Lumentalk Enabled Dimming [7] [26] [43]

Notes:

1. Refer to website product configurator for all exceptions.
2. Refer to website for EZ Ship configurations.
3. Refer to website for ENERGY STAR certified product configurations.
4. Not available for 700 lumens. Not available for 1000 lumens when combined with 80 color rendering option.
5. Not available for XN and VN optics.
6. Not available for DTW, DTWP, DWH, DWW or DWWP color options.
7. Not available for ENERGY STAR certification.
8. Not available for CR90.
9. For ENERGY STAR certification, not available with RM or NC installation types when combined with 90 color rendering option.
10. Available for M, MFR, W, WFR, VW and VWFR optics only.
11. Not available with PC, IC, IC/AT or RMR installation types.
12. Available for CRI 80 only.
13. Compatible with all control options except for DALIT8.
14. Available for 1000 and 1300 lumens when combined with 90 color rendering option and MFR, W, WFR, VW or VWFR optics only.
15. MFR, WFR and VWFR faceted reflector optics are recommended for optimal performance.
16. Compatible with DA1, SDALI1, SDALI2, DMX/RDM and LT control options only.
17. Available for 1300 lumens when combined with 80 color rendering option and MFR, W, WFR, VW or VWFR optics only.
18. Compatible with LT, DMX/RDM and DALIT8 control options only.
19. Available for 700 lumens when combined with 80 or 90 color rendering options and 27K, 30K, 35K or 40K color temperature options only.
20. Available up to 1300 lumens when combined with 80 or 90 color rendering options and 27K, 30K, 35K or 40K color temperature options only.
21. Available up to 1300 lumens when combined with 80, 90 or 95 color rendering options only.
22. Available up to 2000 lumens when combined with 80 or 90 color rendering options and up to 1300 lumens when combined with 80, 90 or 95 color rendering options only.
23. Available up to 3000 lumens when combined with 80 color rendering option and up to 2000 lumens when combined with 80, 90 or 95 color rendering options only.
24. Control options vary according to color temperature, color rendering, optics and installation type combination. Refer to website product configurator for details.
25. Manufacturer's choice driver. Order code may change to NO1.
26. Not available with 347V.
27. Not available for 3000 lumens.
28. Manufacturer's choice driver. Order code may change to DAMC1 or DAMC2.
29. Not available for XN and VN optics.
30. Driver cuts off power to the fixture when the control signal drops below 0.5V.

LMPG Inc. reserves the right to make changes to this product at any time without prior notice and such modification shall be effective immediately.
2026.04.15 Copyright © 2026 LMPG Inc.

31. Manufacturer's choice driver. Order code may change to PH1 or PH2.
32. Available for 120V voltage option only.
33. Manufacturer's choice driver. Order code is subject to change.
34. Not available for 700 lumens.
35. Not available for M, MFR, W, WFR, VW and VWFR optics when combined with 1000 lumens.
36. One EcoSystem® address per fixture. Lutron® EcoSystem® Enabled dimming not available for 1300 lumens combined with VN optic. Available for static white color temperatures only.
37. Not available for 3000 lumens.
38. Available for DWH, DWW and DWWP color options only. DALI-2 Type 8 controller required.
39. Not available for PC, IC or IC/AT installation types.
40. Configurable between 8 or 16-bit dimming control via RDM. DMX/RDM requires LumenID, LumenID software and onsite commissioning.
41. A Control Box (CBX-DS or CBX-ST) and lumenID (LID) must be specified.
42. Configurable to 1, 2, or 3 channel control via RDM in the field.
43. A Lumentranslator 2 (LTL2) and LumenID (LID) must be specified for Lumentalk applications. Consult Lumentranslator 2 and Lumentalk pages and specification sheets for details.

LMPG Inc. reserves the right to make changes to this product at any time without prior notice and such modification shall be effective immediately.
2026.04.15 Copyright © 2026 LMPG Inc.

How to Order

Decorative Bezel	Decorative Bezel Finish	Trim [49]	Trim Finish	Installation Type	Ceiling Thickness [56]	Option	Accessories [65]
SB Standard **MB** Mid/Semi Recess **DB** Deep Recess **DR** Deep Rollover	**MWH** Matte White **MBK** Matte Black [44] **MSI** Matte Silver **NKS** Nickel Satin [45] **DCH** Dark Chrome [44] **BCH** Bright Chrome [45] **SWT** Satin Wheat [46] **CC** Custom Color Trim [46] [47] **SP** Special Point Source Color [46] [48]	**RD** Round [50] **SR** Square Trim with Round Hole [50] **TLR** Trimless Round [50] **SQ** Square [51] **TLS** Trimless Square [51]	**MWH** Matte White **MBK** Matte Black **MSI** Matte Silver **NKS** Nickel Satin **CC** Custom Color Trim [47] **SP** Special Point Source Color [48]	**RM** Remodel Non-Insulated Ceiling (Plenum Rated in Accordance to UL 2043 & CAN/ULC-S142) [52] **NC** New Construction Non-Insulated Ceiling (Plenum Rated in Accordance to UL 2043 & CAN/ULC-S142) [52] **PC** Plenum Non-Insulated Ceiling (Enclosed Box) [37] [53] [54] **IC** New Construction Insulated Ceiling (Enclosed Box) [37] [53] [54] **IC/AT** New Construction Insulated Ceiling (Chicago Plenum/airtight, enclosed box) [37] [53] [54] **RMR** Remote Recessed Insulated Ceiling/Plenum (enclosed box) [37] [53] [54] [55]	**1** 0.04 in to 1 in Ceiling Thickness **2** 1.05 in to 2 in Ceiling Thickness	**WET** IP54 Rating Suitable for Wet Locations [57] [58] [59] [60] [61] **EBB** Emergency Battery Backup with Hanger Bar (Bodine BSL17C-C2) [6] [7] [26] [62] [63] [64] **EBI** Emergency Battery Backup with Hanger Bar (Iota ILB-CP07-A TBTS) [6] [7] [26] [62] [63] [64]	**NA** No Accessory **HL** Honeycomb Louver [7] [66] **XLVR** Concentric Ring Louver [7] [67] [68] **CL** Clear Glass Lens [60] **SL** Softening Glass Lens [7] **PD** Prismatic Diffuser [60] [69] **LSN** Linear Spread Lens Narrow (1° x 40°) [7] [70] [71] **LSW** Linear Spread Lens Wide (1° x 60°) [7] [71] [72] **BW1** Beam Widening Lens (+10°) [7] [71] **BW2** Beam Widening Lens (+20°) [7] [71] **BW3** Beam Widening Lens (+30°) [7] [71]

Notes:

6. Not available for DTW, DTWP, DWH, DWW or DWWP color options.
7. Not available for ENERGY STAR certification.
26. Not available with 347V.
37. Not available for 3000 lumens.
44. For ENERGY STAR certification, not available with MB, DB and DR decorative bezels when combined with RM or NC installation types or PC, IC and IC/AT installation types when combined with 90 color rendering option.
45. For ENERGY STAR certification, not available with MB, DB and DR decorative bezels when combined with RM or NC installation types.
46. For ENERGY STAR certification, not available with MB, DB and DR decorative bezels.
47. Longer lead times can be expected for custom RAL color finishes.
48. Refer to Cylinder specification sheet and brochure for color options.
49. Not applicable to DR bezel option.
50. Cannot be combined with square ceiling cutout.
51. Cannot be combined with round ceiling cutout.
52. Available for 700 lumens when combined with XN optic and up to 1300 lumens when combined with VN, NS and N optics. Available up to 2000 lumens when combined with NFR optic and up to 3000 lumens when combined with M, MFR, W, WFR, VW and VWFR optics. Refer to optic option notes for color rendering limitations.
53. Available for 700 lumens when combined with XN optic and up to 1300 lumens when combined with VN, NS, N and NFR optics. Available up to 2000 lumens when combined 80 color rendering option and M, MFR, W, WFR, VW and VWFR optics. Refer to optic option notes for color rendering limitations.
54. Not available for DWH, DWW or DWWP color options.
55. Remote distance is a maximum of 75 ft. For longer remote distances, please contact Lumenpulse Application Engineering Team for application validation.
56. Ceiling springs are field changeable, consult factory and installation instructions for details.
57. IP54 rating only if installation is interior covered recessed ceiling-mounted or exterior canopy-mounted.
58. DR bezel is recommended for outdoor canopy installations.
59. A CL, SL or PD must be specified to maintain an IP54 rating. A second accessory may be specified.
60. For ENERGY STAR certification, not available with RM or NC installation types when combined with 90 color rendering option combined and 2000 lumens.
61. Wet option respects the IEC 60529:2013 standard.
62. Available for RM and NC installation types only.
63. Emergency battery backup options are field installed and not presided by Lumenpulse. Refer to related installation instructions for details.
64. Emergency battery backup options require ceiling access for test button use. The battery will operate for 90 minutes minimum and maintain a minimum of 1 fc from a 7 ft 2 in height as per UL 924. For indoor use only in dry or damp locations.
65. Maximum two accessories per fixture.
66. Not available for DTW and DTWP color options.
67. Available for XN, VN and NS optics only.
68. Can be combined with PD accessory only.
69. Recommended to be combined with HL or XLVR accessory only.
70. Recommended for XN, VN, NS, N and NFR optics when combined with 2200K, 2700K, 3000K, 3500K, 4000K color temperature options. Nominal 10° x 40° distribution when used with the NS optic. Recommended for MFR optic when combined with DTW, DTWP, DWH, DWW or DWWP color options only.
71. For optimal performance, it is not recommended to mix with other accessories.
72. Recommended for XN, VN, NS, N and NFR optics when combined with 2200K, 2700K, 3000K, 3500K, 4000K color temperature options only. Nominal 10° x 60° distribution when used with the NS optic. Recommended for MFR optic when combined with DTW, DTWP, DWH, DWW or DWWP color options only.

LMPG Inc. reserves the right to make changes to this product at any time without prior notice and such modification shall be effective immediately.
2026.04.15 Copyright © 2026 LMPG Inc.