DESCRIPTION

New construction housing for MINI ACCURUS round trims. For **12V MR16** lamps.

For new construction applications. Insulation must be kept 3" from all sides and at least 1" above the housing.

Catalog #	ACM500	**Type**	
Project	METRO STATE COLLEGE OF DENVER	D4	
Comments		**Date**	
Prepared by	ILLUMINATION SYSTEMS	3/15/2011	

SPECIFICATION FEATURES

A ...Housing
Housing and plaster frame: 18 gauge CRS with flat black powder coated internal finish. Removable housing top with toollless access provides easier maintenance. Adjustable plaster frame can accommodate up to 1" ceiling thickness.

B ...System Protection:
Thermal protection provided to guard against overheating and misuse of insulation over and around fixture. Vent holes in housing provide cooler operation.


C ...Electrical
Integral j-box and electronic or magnetic low voltage transformer. 120V or 277V input. Junction box is U.L. listed for through branch wiring. Includes six 1/2 trade size knockouts. J-box and transformer enclosure are located at separate ends of the housing. Transformers and electrical include easy toolless removal for maintenance.

D ...Lamp
Internal rotation ring with locking adjustment. Provides 360° rotation of trim and secures original trim position after relamping.


12V MR16 50W max. Includes "POSI-GRIP" bi-pin lamp socket for firm, mechanical lamp connection.

E ...Mounting
Hanger Bars and Butterfly Brackets included for residential and commercial applications respectively. Perforated flaps for secure drywall installation.

GOT NAIL hanger bars include pre-installed nails that easily install in regular lumber, engineered lumber, and laminated beams. Safety and guidance system prevents snagging, ensures smooth straight nail penetration and allows bar hangers to be easily removed if necessary. Automatic levelling flange aligns the housing and lets you hold the housing in place with one hand while driving the nails. Housing can be positioned at any point within a 24" joist span. Pass-N-Thru™ feature allows bar hangers to be shortened without removing from plasterframe. Score lines allow "tooless" shortening for 12" joists. Integral T-bar clip snaps onto T-bars with no additional clips required.



Ceiling Cut-Out: 3.63" dia.

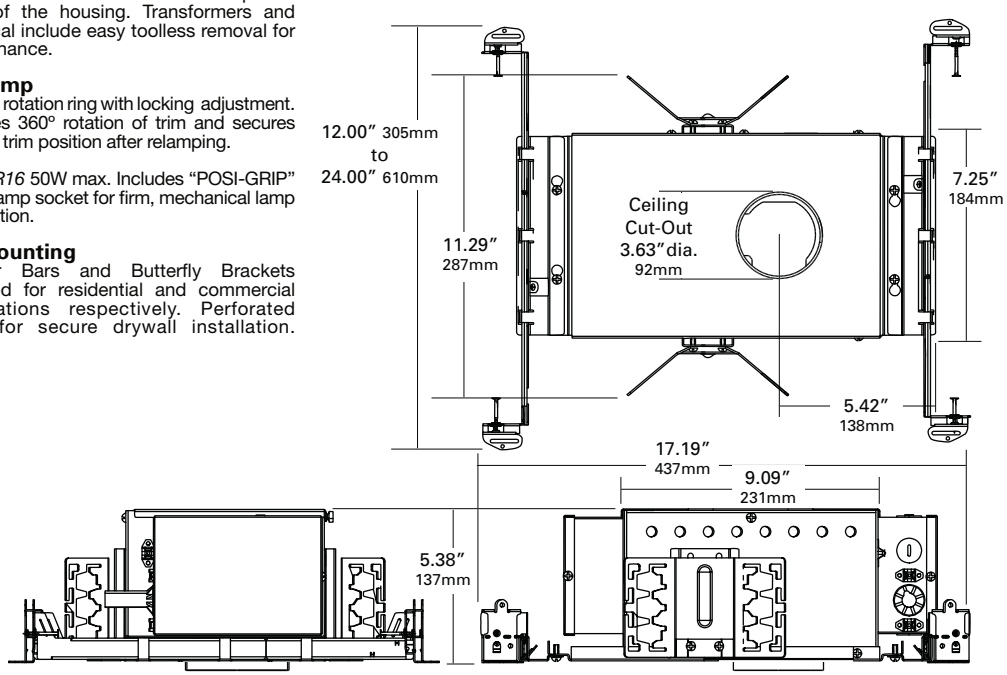



MINI ACCURUS

ACM500
New Construction Housing for Round Trim

Compatible with the following lamps:

12V MR16 50W max.

c UL us

ORDERING INFORMATION

ACM500			
Fixture	**Power Supply**	**Lamp Type / Wattage Label**	**Power Supply Voltage**
ACM500 = MINI ACCURUS New Construction Housing for Round Trim Insert	**E** = Electronic Transformer **M** = Magnetic Transformer	**020M16** = 20 Watt MR16 12V **037M16** = 37 Watt MR16 12V **042M16** = 42 Watt MR16 12V **050M16** = 50 Watt MR16 12V	**1** = 120V **2** = 277V

DESCRIPTION

3.9" small aperture adjustable round recessed wall wash trim. For use with 12V MR16 lamp 50W max., CMHMR16 20W, or ES16 BriteSpot 39W.

For use in accent lighting applications where small aperture, unobstrusive recessed ceiling fixtures are desired.

Catalog #	ACM5003WH	**Type**	
Project	METRO STATE COLLEGE OF DENVER	D4	
Comments		**Date**	
Prepared by	ILLUMINATION SYSTEMS	3/15/2011	

SPECIFICATION FEATURES

A ...Recessed Trim
Adjustable trim. 3.9" o.d. trim face with 1.7" aperture. Includes bullet plunger retainers for smooth snap-in action during installation and removal of trim for relamping. Helps guard against plaster cracking.

B ...Lamp
For use with 12V MR16 lamp 50W max. CMH MR16 20W or ES16 BriteSpot 39W. Lamp not included.


C ...Socket
Posi-Grip bi-pin socket for 12V MR16. GX10 for metal halide lamps. (Included with Mini Accurus Housing sold separately)

D ...Lens
Solite™ soft focus lens included. Can hold up to two (2) optical accessories total.

E ...Finish
Trim face is powder coated in white, black, industrial silver, stainless steel or primer finish for painting in existing ceiling color. All other internal components are flat black.

F....Safety
Steel safety cable provided. Attaches to tab inside housing to prevent falling during maintenance or as a result of accidental dislodging of the trim.

G...Adjustment
Adjustable from 0º - 30º tilt with mechanical locking. Locking alignment plate in Mini Accurus housings provide 360º rotational adjustment and ensures original orientation of trim after relamping.

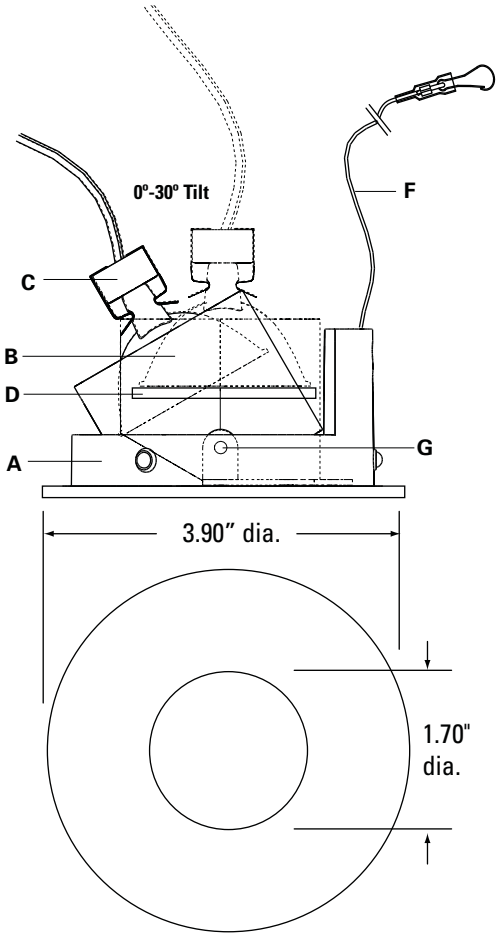



MINI ACCURUS RECESSED

ACM5003
3.9" O.D. 1.7" Aperture Adjustable Round Trim

FOR 12V MR16 50W max.
CMH MR16 20W
ES16 BriteSpot 39W

Compatible Housings:
ACM500 / ACM500MH
ACM502IC / ACM502ICMH
ACM504RM / ACM504RMMH

c UL us

ORDERING INFORMATION

ACM5003	WH

Fixture
ACM5003 = 3.9" Recessed Round Adjustable Trim 1.7" Aperture

Finish
WH = White
BK = Black
S = Industrial Silver
SS = Stainless Steel (painted)
PM = Primer