


Microcontroller / 802.15.4 radio (ATmega128RFA1)








ISP programmer must only supply 3.3V power and logic.

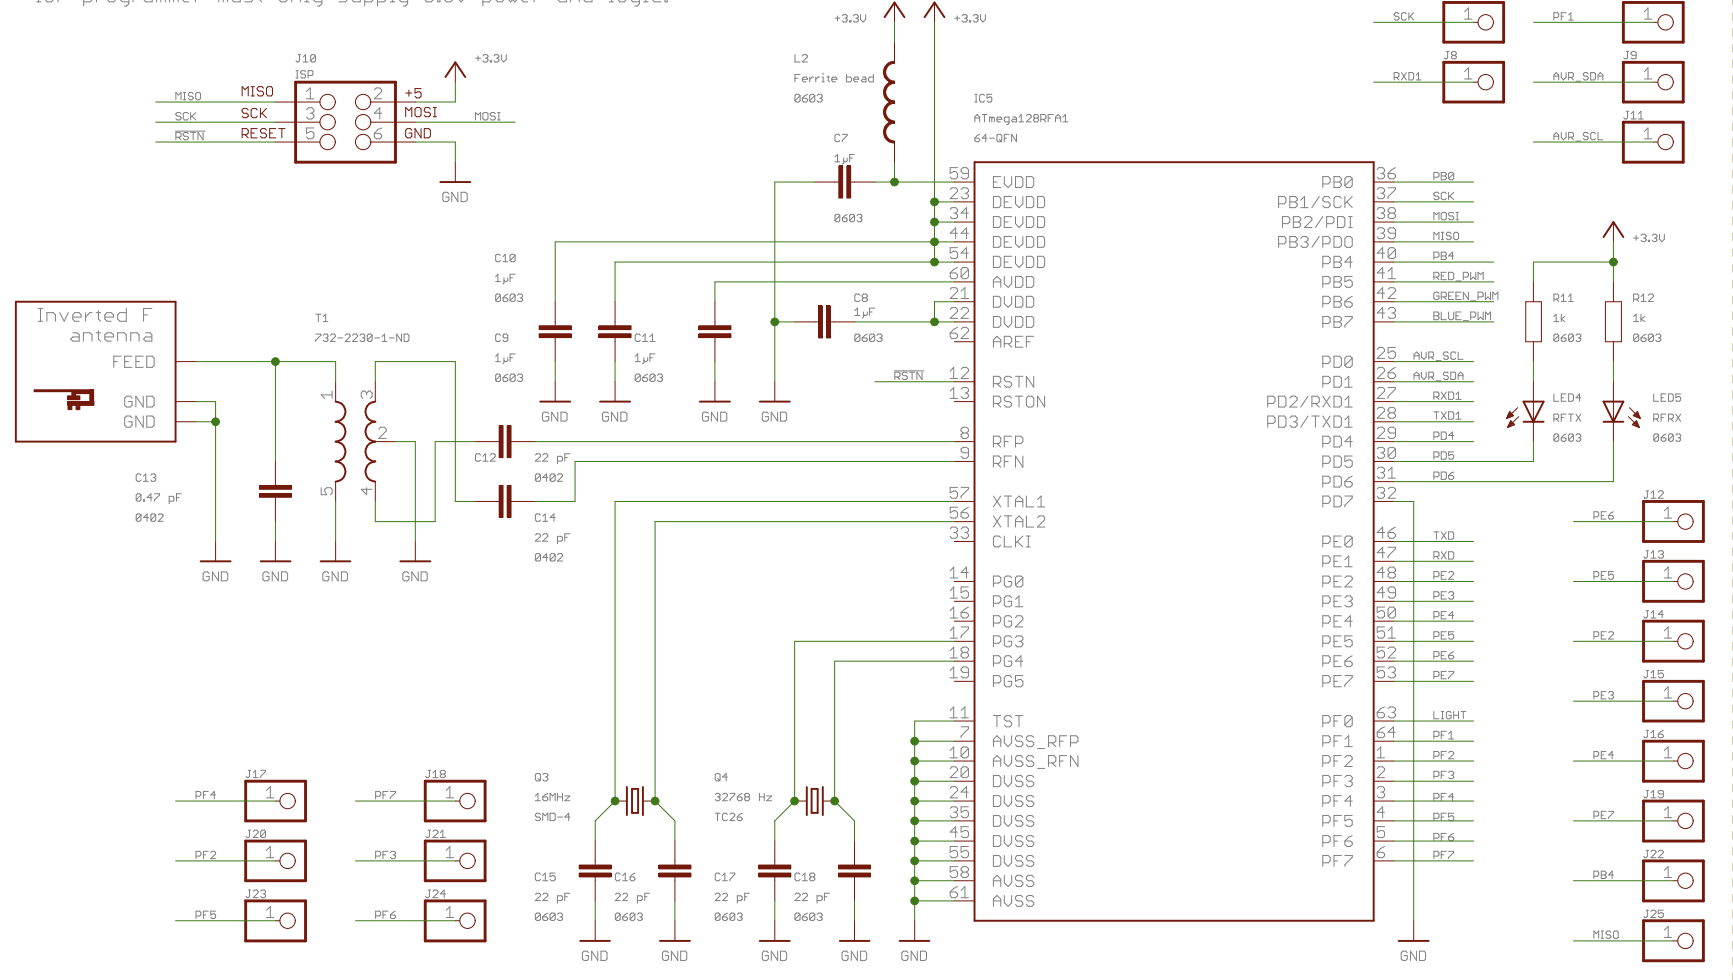

RaspberryMesh

21/10/12 11:26 PM

Sheet: 1/1

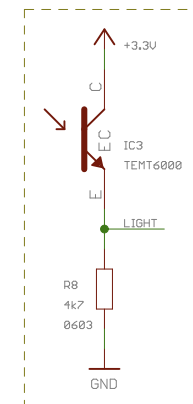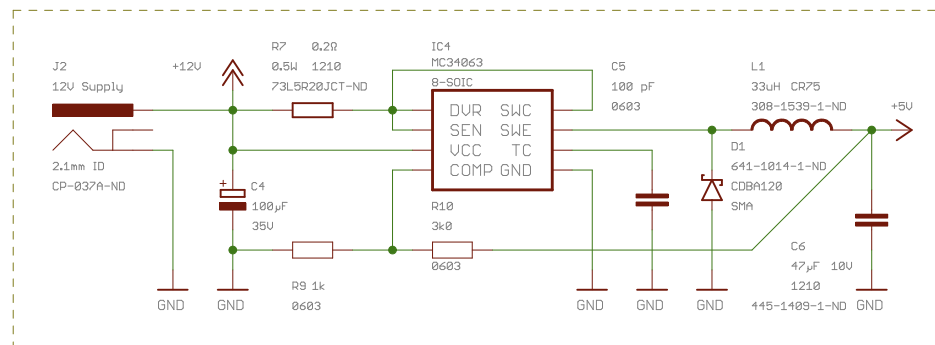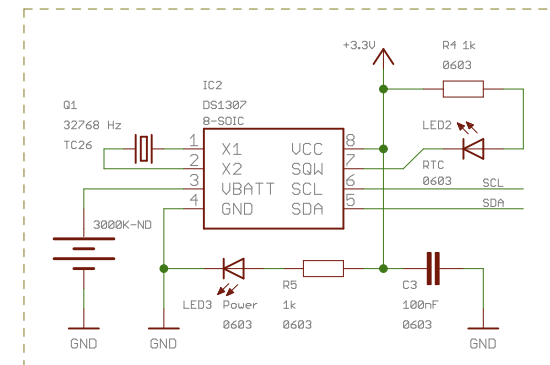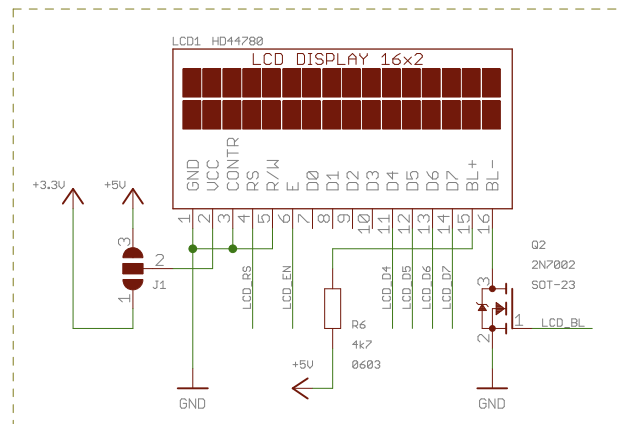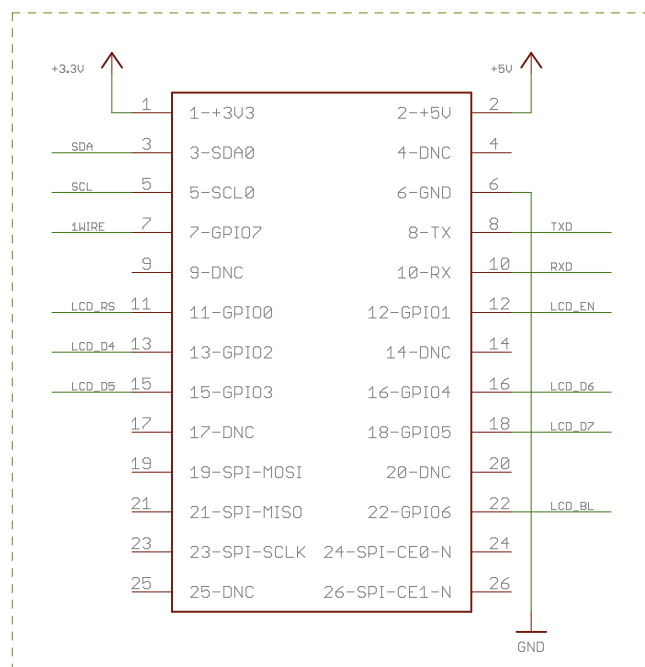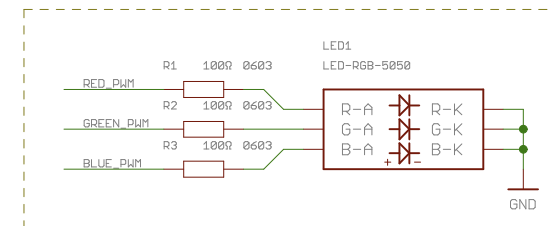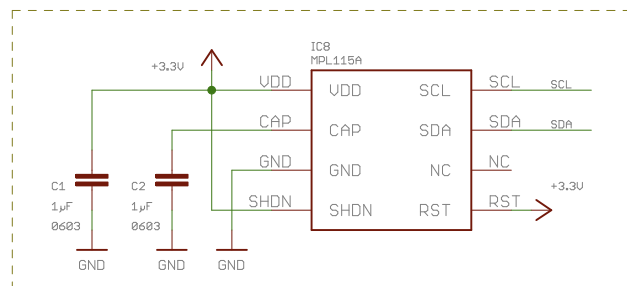

Raspberry Pi Sensor / Power Supply / 802.15.4 daughterboard

Luke Weston, 2012

Released under the CERN Open Hardware License:

<http://ohwr.org/cernohl>



RaspberryMesh

21/10/12 11:26 PM

Sheet: 1/1