


SPRING-LOADED CONNECTORS

SERIES 810 • 2,54 GRID HORIZONTAL SURFACE MOUNT • SINGLE ROW STRIPS

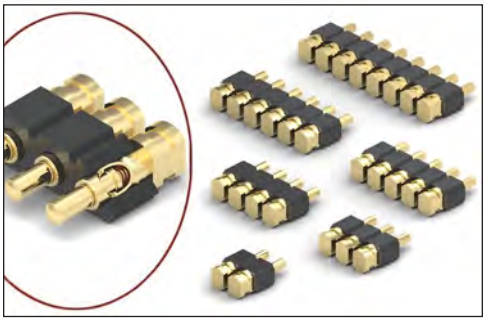


SINGLE ROW Series 810

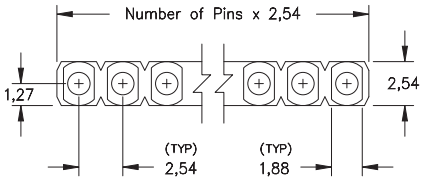

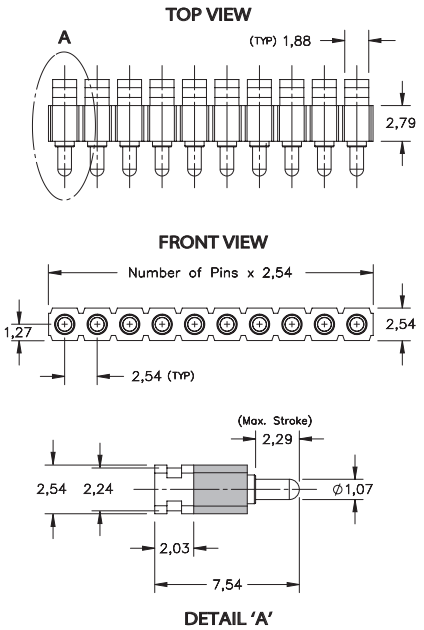

Suggested P.C.B. FOOTPRINT

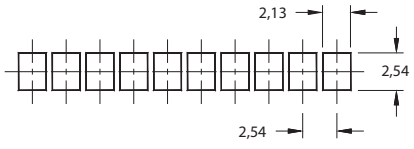

Coplanarity 0,13. For Pin Counts >10 positions consult Technical Support

- Modular contacts for use on 2,54 grid, supplied in single row contact strips. Piston action is parallel to the board surface
- Ideal for daisy chaining of P.C.B.'s when mated with right angle target connectors (series 399...10-008) or for mating boards in a perpendicular orientation
- Precision-machined piston / base and gold-plated components assure up to 1,000,000 cycle life durability
- Pistons have a 1,14 mid. stroke & 2,29 max. stroke
- Low resistance, high current contacts are rated at 2 amps continuous, 3 amps peak
- High temperature thermoplastic insulators are suitable for surface mount processes
- 810 series contact strips are designed for manual placement onto solder pads

ORDERING INFORMATION

Single Row Series 810

810-22-0XX-40-001101

Specify number of contacts 01-10

Technical Specifications

Materials:

Contact piston & base: Machined copper alloy plated 0,51µm gold over 2,54µm nickel
Spring: Beryllium copper-plated 0,25µm gold
Insulator: High temperature thermoplastic, rated UL94 V-0

Mechanical:

Spring force @ initial height: 25 grams
Spring force @ mid stroke (1,14): 60 grams
Durability: Up to 1,000,000 cycles

Electrical:

Voltage rating: 100Vrms/150Vdc
Current rating: 2A (continous), 3A (peak) per contact
Contact resistance: 20mΩ max.
Insulation resistance: 10,000MΩ min.
Dielectric strength: 700Vrms min.
Capacitance: 1pF max.

RoHS-2 2011/65/EU

MILL-MAX Mill-Max Mfg. Corp. • 190 Pine Hollow Road, P.O. Box 300, Oyster Bay, NY 11771 • 516-922-6000 • Fax: 516-922-9253 • www.mill-max.com

SPRING-LOADED CONNECTORS

SERIES 319, 399 • 2,54 GRID TARGET CONNECTORS FOR SPRING-LOADED ASSEMBLIES • SINGLE ROW STRIPS



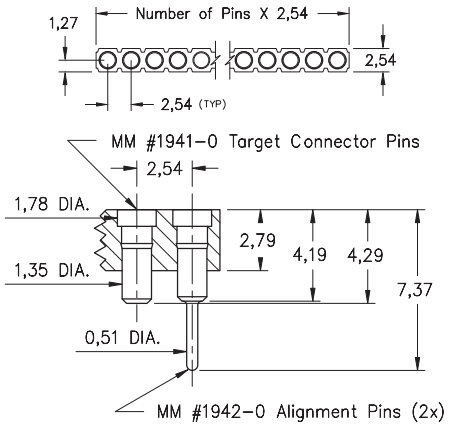


FIG. 1



Coplanarity 0,13. For Pin counts >10 positions, consult Technical Support.

FIG. 2



Coplanarity 0,13. For Pin counts >10 positions, consult Technical Support.

FIG. 3


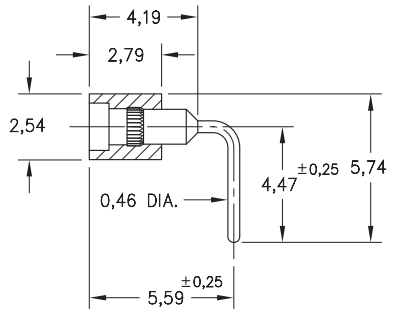


FIG. 4

- Series 319 and 399 Spring Target Connectors, supplied in single row strips. Available in SMT and right angle through-hole termination configurations
- Target Connectors provide an excellent gold-plated conductive mating surface for spring loaded connectors. These series are offered with a flat face for making contact with our standard 1,07 dia. spring pin plungers
- Target connectors use MM #1940, #1941/1942, #1953 and #1954 pins. See pages 218 & 223.3 for details
- Insulators are high temperature thermoplastic

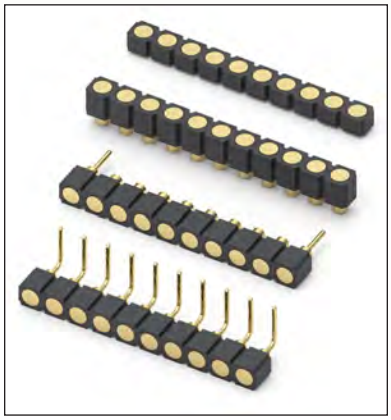

ORDERING INFORMATION

FIG. 1	**Series 319...041**	**Surface Mount w/ Alignments Pins**
	319-10-1__-30-041000	
	Specify number of pins	03-64
FIG. 2	**Series 319...008**	**Surface Mount**
	319-10-1__-30-008000	
	Specify number of pins	01-64
FIG. 3	**Series 319...054**	**Low Profile Surface Mount**
	319-10-1__-30-054000	
	Specify number of pins	01-64
FIG. 4	**Series 399...008**	**Right Angle Solder Tails**
	399-10-1__-10-008000	
	Specify number of pins	01-64

RoHS-2 2011/65/EU

XX=Plating Code See Below

For Electrical, Mechanical & Enviromental Data, See page 264

SPECIFY PLATING CODE XX=	10 ◆			
Pin Plating	0,25µm Au			

Mill-Max Mfg. Corp. • 190 Pine Hollow Road, P.O. Box 300, Oyster Bay, NY 11771 • 516-922-6000 • Fax: 516-922-9253 • www.mill-max.com