

Wall thickness [mm]

HPSD

vHPSD

Weak cooling
800 W/m²K

Nominal cooling
1500 W/m²K

Strong cooling
2500 W/m²K

Overheat probability

1.0







0.8

0.6

0.4

0.2

0.0

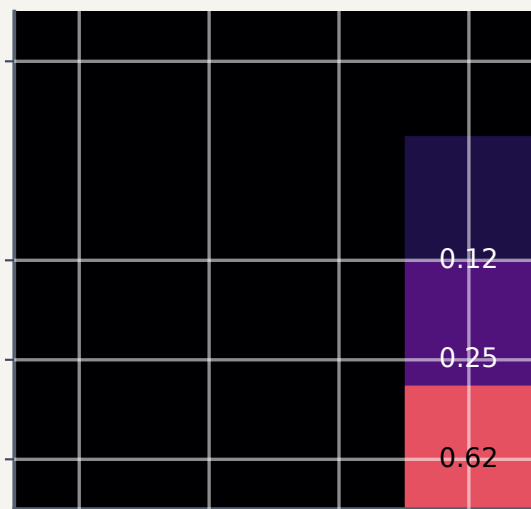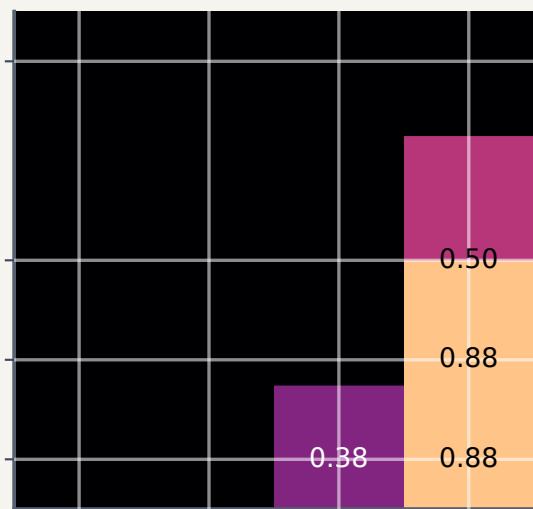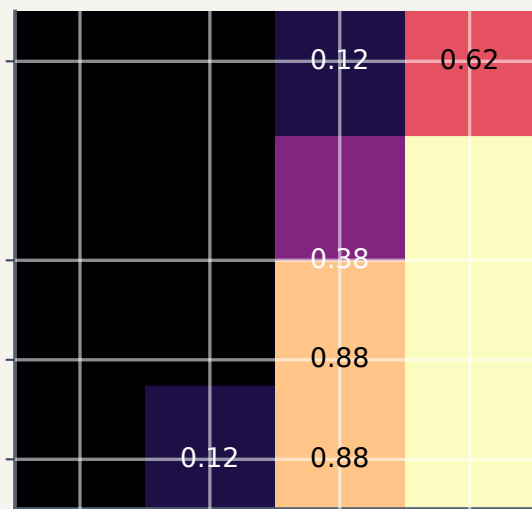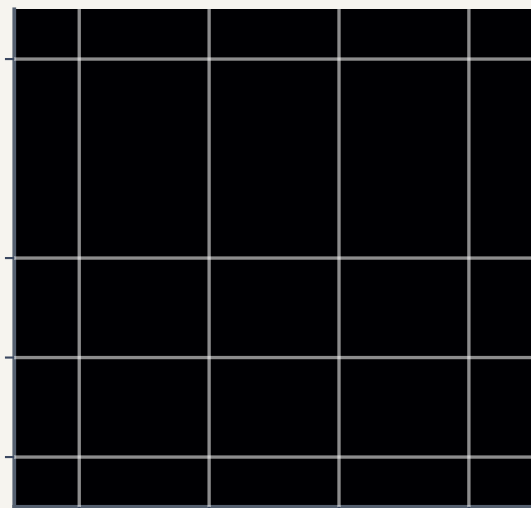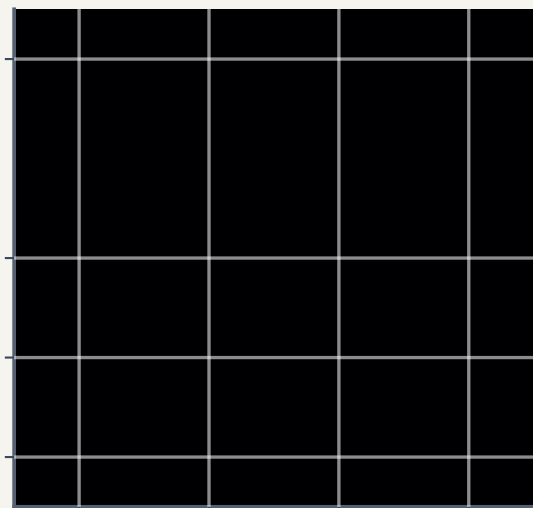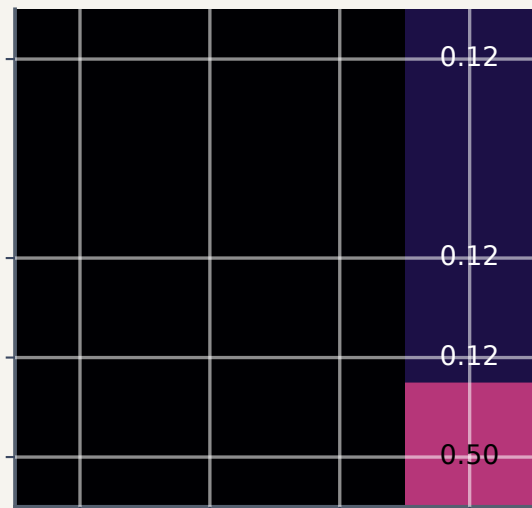

Nominal insertion [mm]

Nominal insertion [mm]

Nominal insertion [mm]