ECW536S

Cloud7 4x4x4 S

Cloud Managed Wi-Fi 7 4×4x4 Indoor Access Point

35px 35px

Overview

EnGenius Cloud Managed Wi-Fi 7 4x4x4 Access Point ECW536S supports tri-concurrent 802.11be Wi-Fi 7 architecture, delivering supercharged speeds up to 11,600 Mbps on 6 GHz, 5,800 Mbps (5 GHz), and up to 1,400 Mbps (2.4 GHz). With WPA3 & WPA2-AES authentication support, remote monitoring & troubleshooting, and Mesh Wireless Support for optimized signal quality, it's easy to set up and manage an unlimited number of APs with the EnGenius Cloud App.

612 (w) x 792

Features & Benefits

- Tri- concurrent 802.11be Wi-Fi 7 architecture & backward-compatible
- Supercharged speeds up to 11,600 Mbps on 6 GHz, 5,800 Mbps (5 GHz) & up to 1,400 Mbps (2.4 GHz)
- 10 GbE realizes greater throughput and supports 802.3bt and 60W PoE injector input for flexible installation over 100 meters (328 feet)
- WPA3 & WPA2-AES authentication support
- Wireless security detection and protection by WIPS radio
- BLE client list by beacon scan
- Cloud Managed with AP & Mesh mode
- Quick-scan device register & configuration and remote monitoring & troubleshooting
- Cloud manage an unlimited number of APs from anywhere with the EnGenius Cloud App
- Mesh Wireless Support simplifies setup, optimizes signals & self-heals

Technical Specifications

Technical Specifications

Standards

IEEE 802.11be on 2.4 GHz

IEEE 802.11be on 5 GHz

IEEE 802.11be on 6 GHz

IEEE 802.3 u/ab

Backward compatible with 802.11a/b/g/n/ac/ax

Antenna

4 x 2.4 GHz: 5 dBi(Integrated Omni-Directional)

4 x 5 GHz: 6 dBi(Integrated Omni-Directional)

4 x 6 GHz: 5 dBi(Integrated Omni-Directional)

Physical Interfaces

1 x 10GE Port (PoE++)

1 x 10GE Port

1 x DC Jack

1 x Reset Button

LED indicators

1 x Multi-color LED

Power Source

Power-over-Ethernet: 802.3bt Input

12VDC /3A Power Adapter

Maximum Power Consumption

37W

Wireless & Radio Specifications

Operating Frequency

Tri-Radio Concurrent 2.4 GHz & 5 GHz & 6GHz

Operation Modes

Managed mode: AP, AP Mesh, Mesh

Frequency Radio

2.4 GHz: 2400 MHz ~ 2482 MHz

5 GHz: 5150 MHz ~ 5250 MHz, 5250 MHz ~ 5350 MHz, 5470 MHz ~ 5725 MHz, 5725 MHz ~ 5850 MHz

6GHz: 5925-7125MHz

Transmit Power

Up to 25 dBm on 2.4 GHz

Up to 24 dBm on 5 GHz

Up to 24 dBm on 6 GHz

(Maximum power is limited by regulatory domain)

Radio Chains

4 × 4:4

SU-MIMO

Four(4) spatial stream Single User (SU) MIMO for up to 1,400 Mbps wireless data rate with VHT40 bandwidth to a 4x4 wireless device under the 2.4GHz radio.

Four(4) spatial stream Single User (SU) MIMO for up to 58,00 Mbps wireless data rate with HE160 bandwidth to a 4x4 wireless device under the 5GHz radio.

Four(4) spatial stream Single User (SU) MIMO for up to 11,600 Mbps wireless data rate with EHT320 bandwidth to a 4x4 wireless device under the 6GHz radio.

MU-MIMO

Four(4) spatial stream MU-MIMO for up to 1,400 Mbps wireless data rate with VHT40 bandwidth to a 4x4 wireless device under the 2.4GHz radio simultaneously.

Four(4) spatial stream MU-MIMO for up to 5,800 Mbps wireless data rate with HE160 bandwidth to a 4x4 wireless device under the 5GHz radio simultaneously.

Four(4) spatial stream MU-MIMO for up to 11,600 Mbps wireless data rate with EHT320 bandwidth to a 4x4 wireless device under the 6GHz radio simultaneously.

Supported Data Rates

802.11be:

2.4 GHz: Max 1,400 (MCS0 to MCS13, NSS = 1 to 4)

5 GHz: Max 5,800 (MCS0 to MCS13, NSS = 1 to 4)

6 GHZ: Max 11,600 (MCS0 to MCS13, NSS = 1 to 4)

802.11ax:

2.4 GHz: 9 to 1,148 (MCS0 to MCS11, NSS = 1 to 4)

5 GHz: 18 to 4,800 (MCS0 to MCS11, NSS = 1 to 4)

6 GHZ: 18 to 4,800 (MCS0 to MCS11, NSS = 1 to 4)

802.11b: 1, 2, 5.5, 11

802.11a/g: 6, 9, 12, 18, 36, 48, 54

802.11n: 6.5 to 600 (MCS0 to MCS31)

802.11ac: 6.5 to 1,733 (MCS0 to MCS9, NSS = 1 to 4)

Supported Radio Technologies

802.11be/ax: Orthogonal Frequency Division Multiple Access(OFDMA)

802.11a/g/n/ac: Orthogonal Frequency Division Multiple (OFDM)

802.11b: Direct-sequence spread-spectrum (DSSS)

Channelization

802.11be supports extreme high efficiency (EHT) —EHT 20/40/80/160/320 MHz

802.11ax supports high efficiency throughput (HE) —HE 20/40/80/160 MHz

802.11ac supports very high throughput (VHT) —VHT 20/40/80 MHz

802.11n supports high throughput (HT) —HT 20/40 MHz

802.11n supports high throughput under the 2.4GHz radio –HT40 MHz (256-QAM)

802.11n/ac/ax packet aggregation: A-MPDU, A-SPDU

Supported Modulation

802.11be: BPSK, QPSK, 16-QAM, 64-QAM, 256-QAM, 1024-QAM, 4096-QAM

802.11ax: BPSK, QPSK, 16-QAM, 64-QAM, 256-QAM, 1024-QAM

802.11ac: BPSK, QPSK, 16-QAM, 64-QAM, 256-QAM

802.11a/g/n: BPSK, QPSK, 16-QAM, 64-QAM

802.11b: BPSK, QPSK, CCK

DFS Certification

FCC/CE/IC

AirGuard (WIPS/WIDS)

Yes

Zero-wait DFS

Yes

Dedicated Scanning Radio

Yes

Max Concurrent User

512

Client Balancing

Yes

Auto Channel Selection

Yes

52px

Technical Specifications

Management Features

Multiple BSSID

8 SSIDs on both 2.4GHz, 5GHz and 6GHz bands

VLAN Tagging

Supports 802.1q SSID-to-VLAN Tagging

Cross-Band VLAN Pass-Through

Management VLAN

Spanning Tree

Supports 802.1d Spanning Tree Protocol

QoS (Quality of Service)

Compliance With IEEE 802.11e Standard

WMM

SNMP

v1, v2c, v3

MIB

I/II, Private MIB

Fast Roaming

802.11r/k

Wireless Security

WPA2-PSK

WPA2-Enterprise

WPA3-PSK

WPA3-Enterprise

Hide SSID in Beacons

Wireless STA (Client) Connected List

Client Isolation

Client Access Control

Interface

IPv4, IPv6

Local Web Access

Supports HTTP or HTTPS

Environmental & Physical

Temperature Range

Operating: 32ºF~104ºF (0 ºC~50 ºC)

Storage: -40 ºF~176 ºF (-40 ºC~80 ºC)

Humidity (non-condensing)

Operating: 90% or less

Storage: 90% or less

Dimensions & Weight

Weight

1270g

Dimensions

230 x 230 x 39.5 mm

Package Contents

1 – ECW536S Cloud Managed Indoor Access Point

1 – Ceiling Mount Base

1 – Ceiling and Wall Mount Screw Kit

1 – T-rail Mount kit

1 – Product Card

Compliance

Regulatory Compliance

FCC

CE

IC

UKCA

42px

52px

Antennas Patterns

42px

35px 30px 35px

2.4GHz

H-Plane

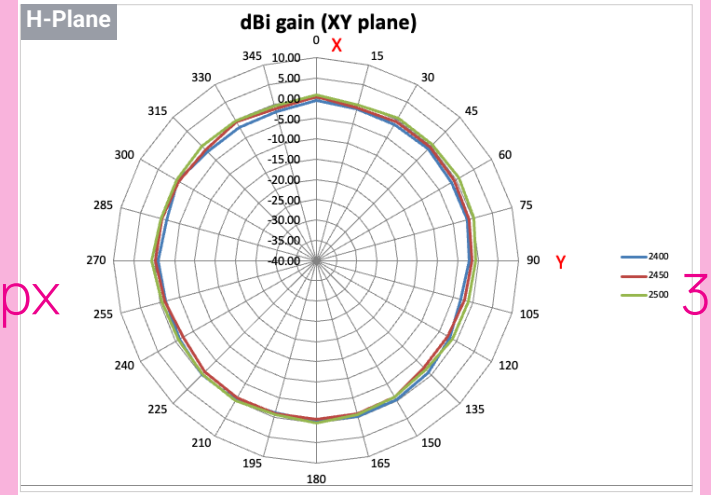

E-Plane

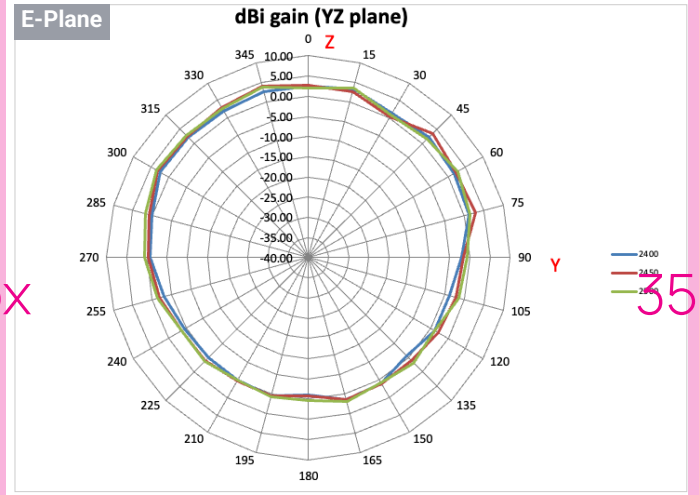

5GHz

H-Plane

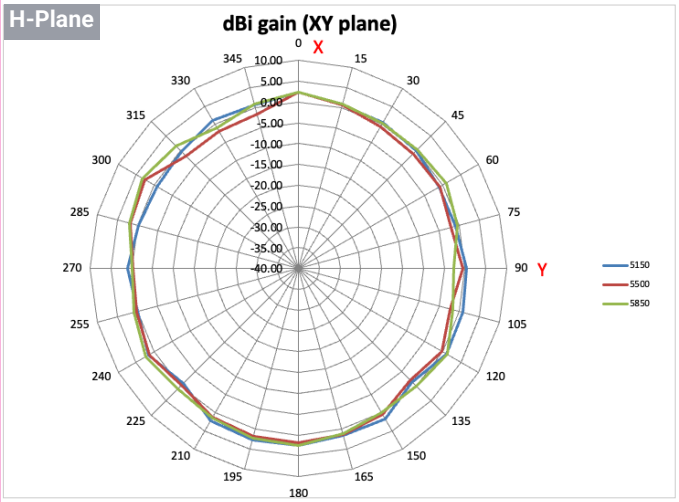

E-Plane

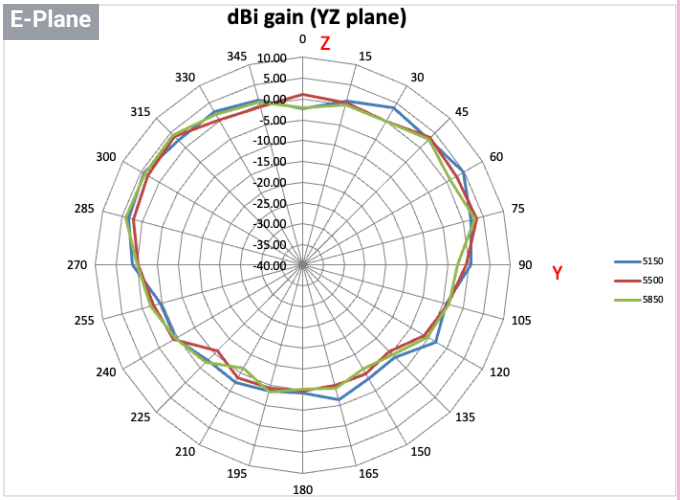

6GHz

H-Plane

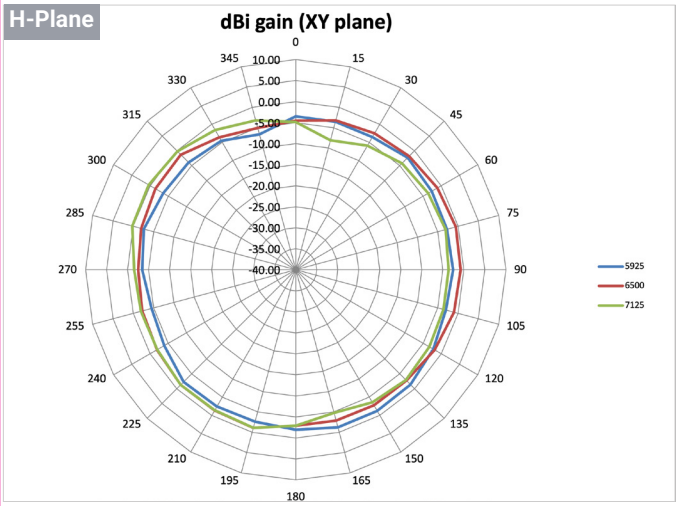

E-Plane

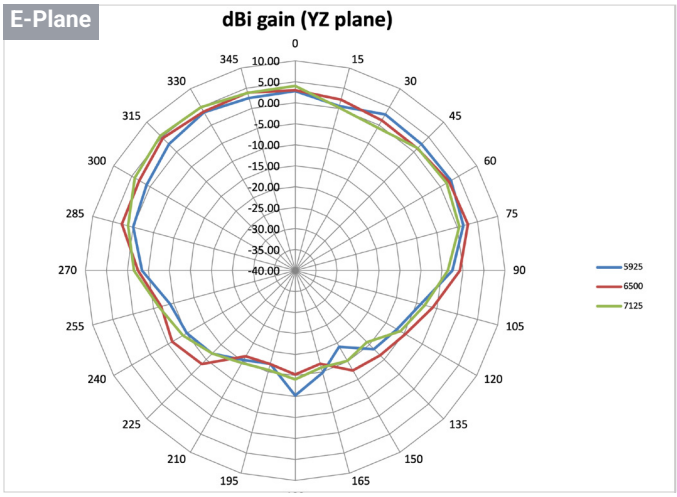

42px

52px

Hardware Overviews

42px

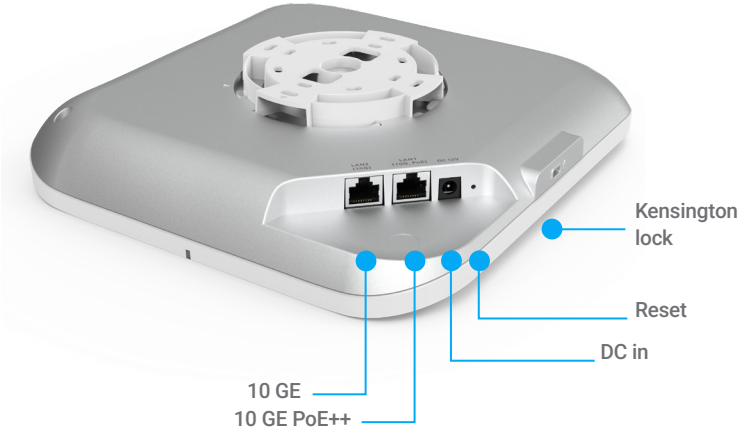

23px

EnGenius®

Features and specifications subject to change without notice. Trademarks and registered trademarks are the property of their respective owners. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his/her own expense. Prior to installing any surveillance equipment, it is your responsibility to ensure the installation is in compliance with local, state and federal video and audio surveillance and privacy laws.

Version 1.7 3/ 26/ 2026

Contact Us

42px