

4.8 相机安装和配置

腕部相机安装示意图





固定相机安装示意图




产品参数

产品型号	HBV-F2170HD V22 (86°)
像 素	200万像素
感光芯片	OV2720(1/5.8")
视场角/焦距	86° 无畸变/ 1.8mm
格 式	MJPEG / YUY2
分 辨 率	MJPEG 640x480 30FPS / YUY2 640x480 30FPS MJPEG 800x600 30FPS / YUY2 800x600 10FPS MJPEG 1280x720 30FPS / YUY2 1280x720 10FPS MJPEG 1280x800 30FPS / YUY2 1280x800 10FPS MJPEG 1280x1024 30FPS / YUY2 1280x1024 5FPS MJPEG 1920x1080 30FPS / YUY2 1920x1080 5FPS
对焦方式	自动对焦
功能介绍	无畸变视场角、1080P、人脸识别
输 出	USB2.0
支持系统	WinXP/Win7/Win8/Win10/MAC OSX/Linux/Android
尺 寸	30mmx25mmx5.2mm
线 材	40cm标配 USB公头测试线 (如需更换其他长度尺寸、规格的联系客服)
工作温度	-30°C~70°C

多属性可调

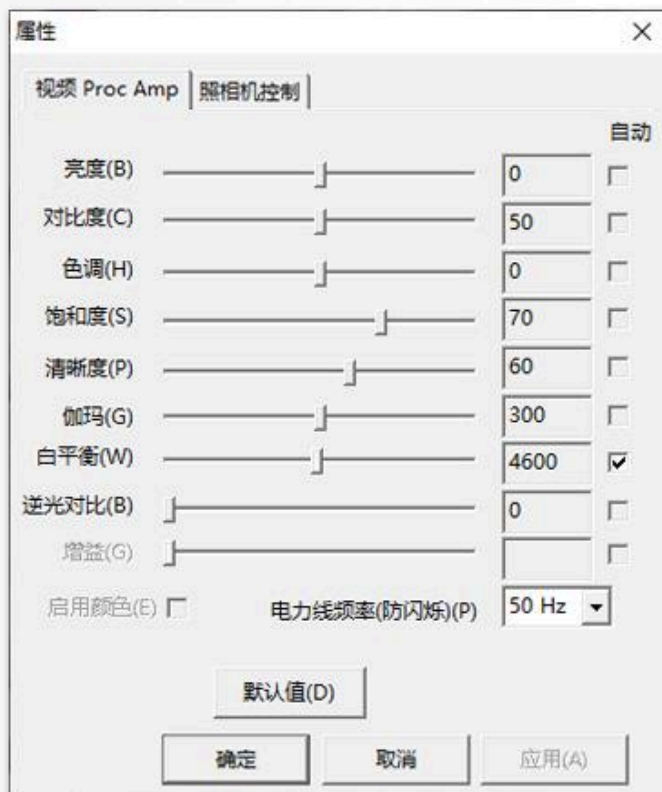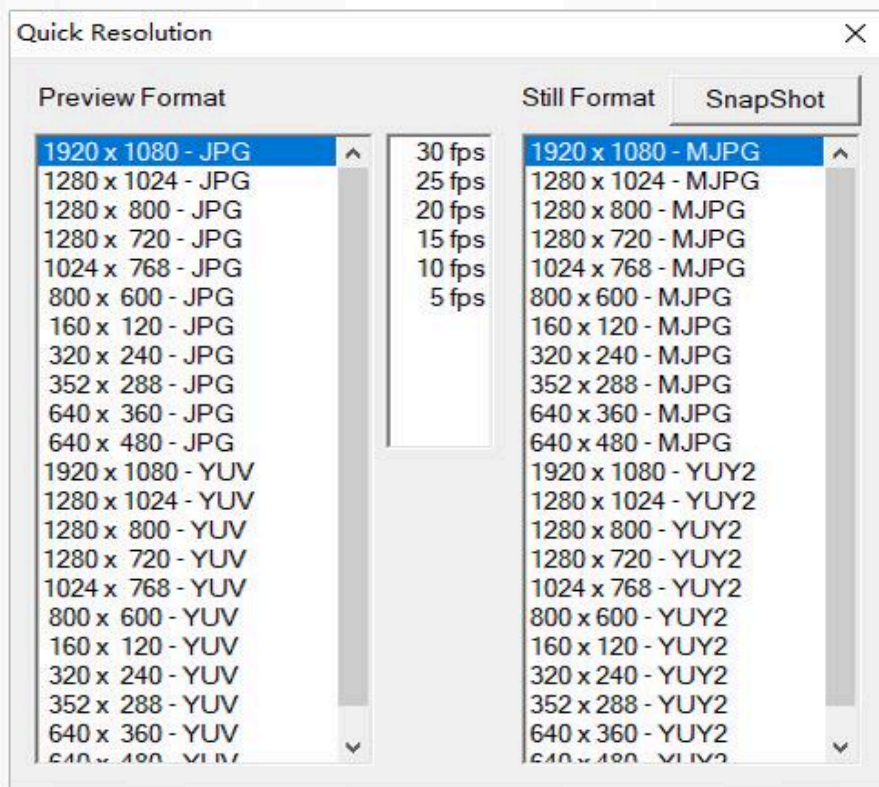


产品实拍图

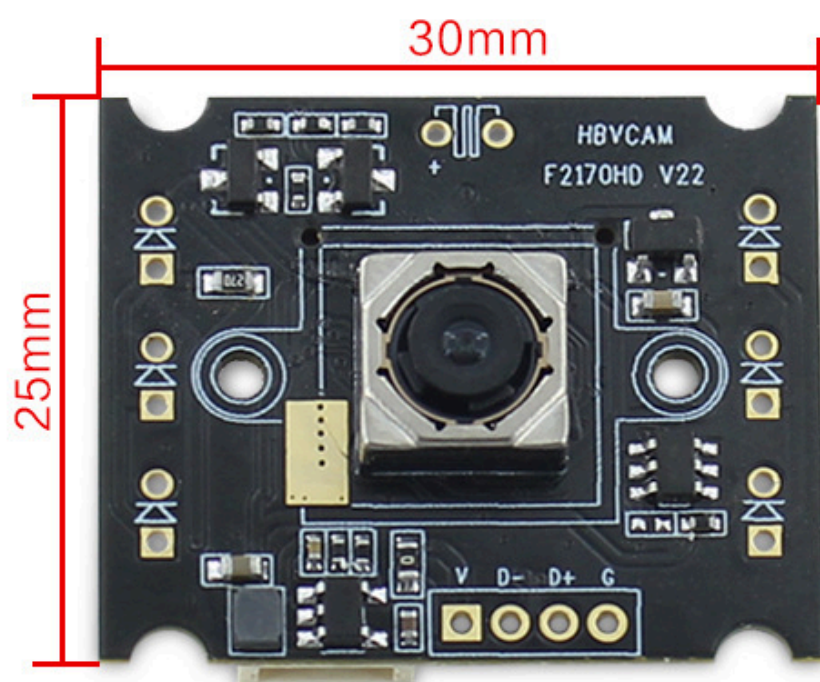




产品结构图

SIDE VIEW

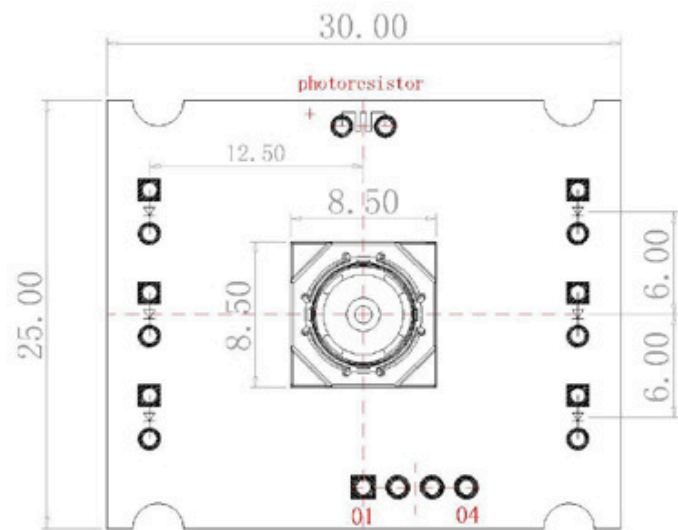

TOP VIEW

BOTTOM VIEW

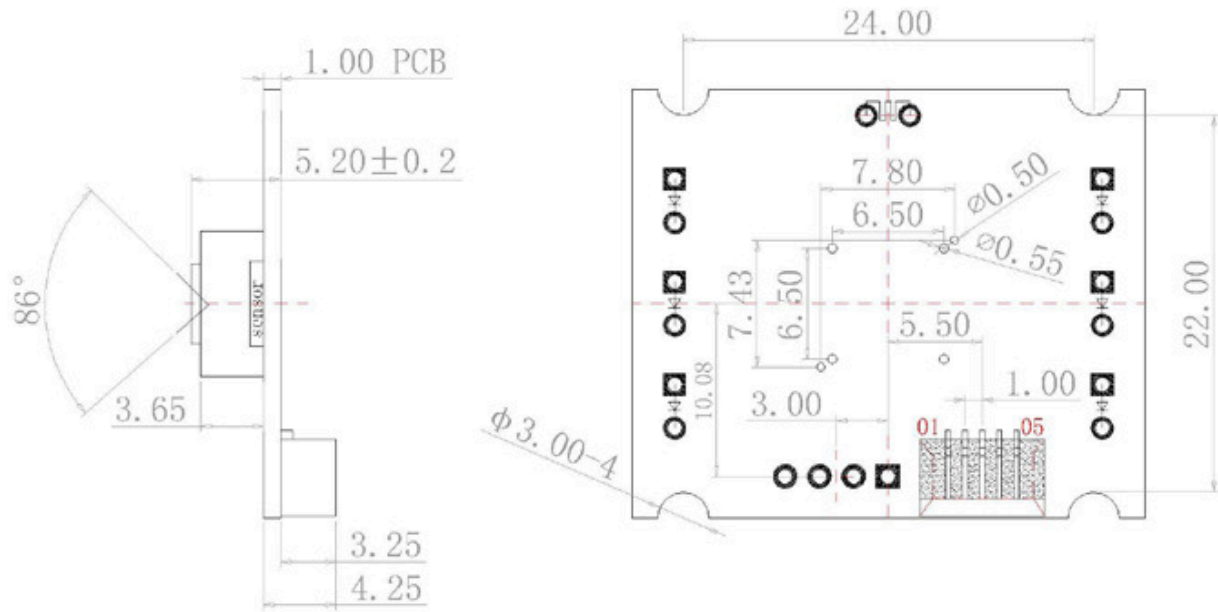

Key Specifications (主要规格)

Module No.	HBVCAM-F2170HD V22		
Module Size	30mm × 25mm × 5.2mm±0.2MM		
Temperature (Operation)	-30℃ to 70℃		
Temperature (Stable Image)	0℃ to 50℃		
Assembly technique	SMT (ROSH)		
Focus	Aout		
Object distance	30CM-infinity		
Resolution	600LW/PH (Center)		
PCB printing ink	Black		
interface	USB 2.0		
Power suuply	USB bus power		
supply voltage	DC 5V ± 5%		
Maximum Power consumption	590mW		
Operating system request	Win XP/win 7、8 / vista /android 4.0/ mac /Linux with uvc		
Sensor	OV2720 (1/5.8")		
Seneor Package	CSP,Bare Die		
Maximum resolution	1920*1080		
Sensitivity	650mV / (lux-sec)		
Pixel Size	1.4μm x 1.4μm		
Maximum Image Transfer Rate	MJPEG 640x480 30FPS / YUY2 640x480 30FPS MJPEG 800x600 30FPS / YUY2 800x600 10FPS MJPEG 1280x720 30FPS / YUY2 1280x720 10FPS MJPEG 1280x800 30FPS / YUY2 1280x800 10FPS MJPEG 1280x1024 30FPS / YUY2 1280x1024 5FPS MJPEG 1920x1080 30FPS / YUY2 1920x1080 5FPS		
S/N Ratio	35 db		
Max Dynamic Range	68 db		
Shutter type	Electronic rolling shutter		
AGC/AEC/Whiter balance	Auto		
Output Formats	YUY2/MJPEG		
Microphone	NC		
Lens Construction	5P		
F/No	2.2		
EFL	1.8mm		
FOV	86°		
TV Distortion	<1%		
Relative Illumination (Sensor)	70%		
IR Filter	650±10nm		
Module Package	Anti-electrostatic tray		
Certifications	FCC/CE/ROSH		


产品功能特点



200万像素



86°视场角



OV2720感光芯片



自动对焦



传感器像素1080P



支持定制

200万像素

200万像素镜头，给您带来纯净细腻画质体验，
图像更清晰。



200万像素镜头




感光芯片 OV2720

感光芯片，稳定性能，图像更清晰

2

感光芯片 OV2720


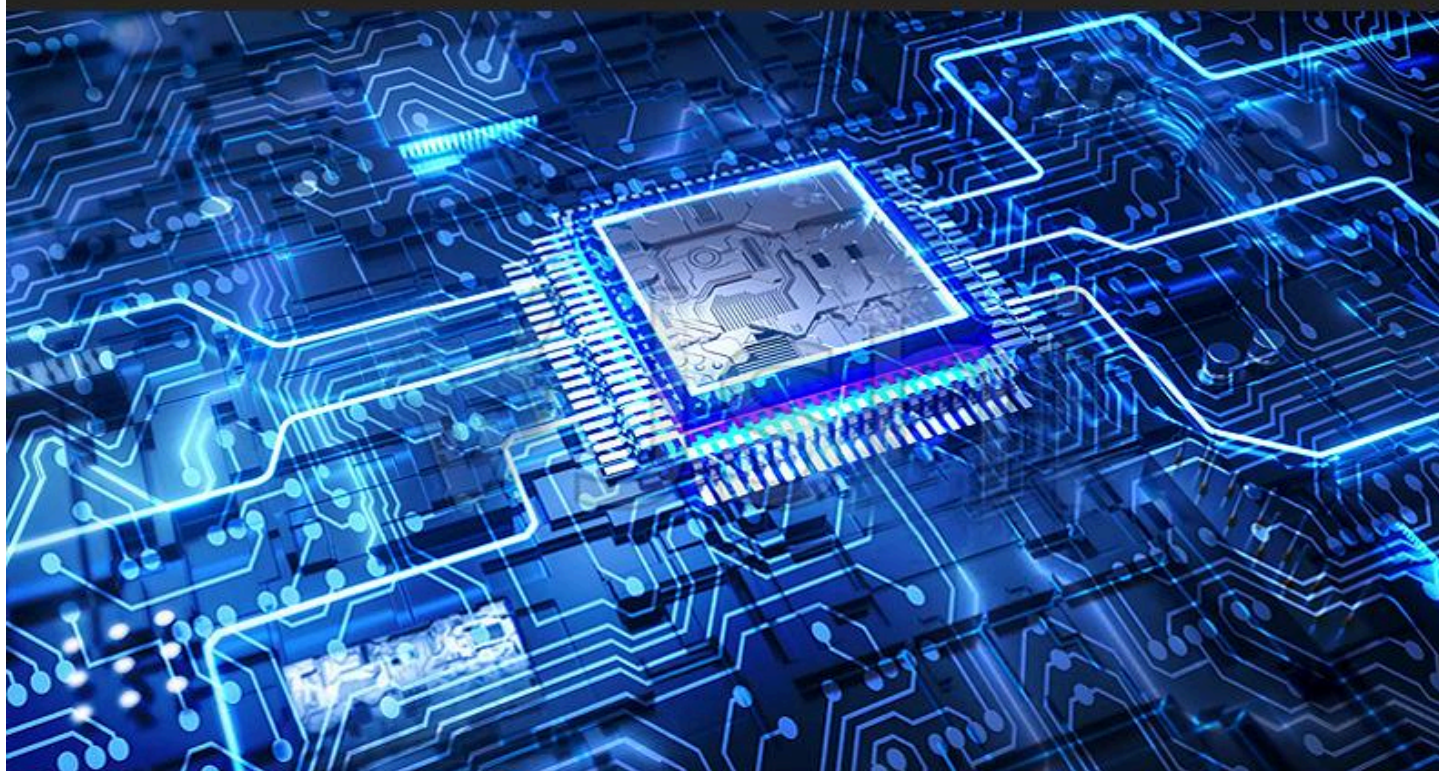


86° 无畸变

—
可视范围更大，视野更宽广


3

86° 无畸变

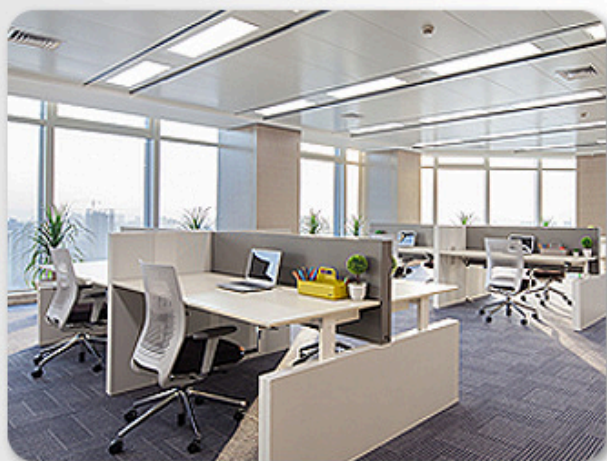

普通镜头可视范围

VS

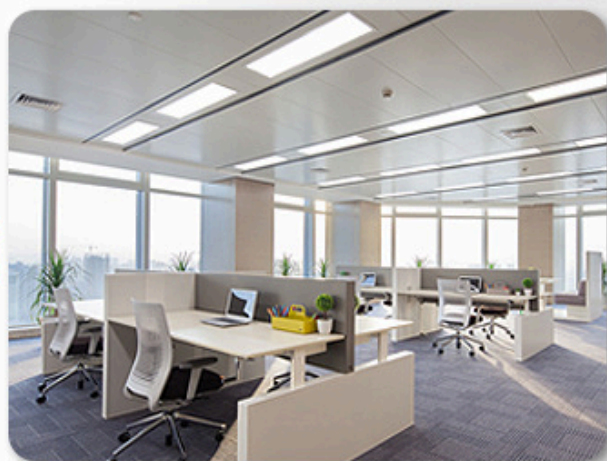

86° 镜头可视范围

如何选择镜头

不同的环境使用不同的镜头，选择适合自己的


4

如何选择镜头

在摄像头中，焦距越小，成像范围越大，画面中的物体成像小，就是近焦镜头；
焦距越大，成像范围越小，画面中的物体成像大，而且清晰，这是远焦镜头。



摄像头镜头监控角度距离分析

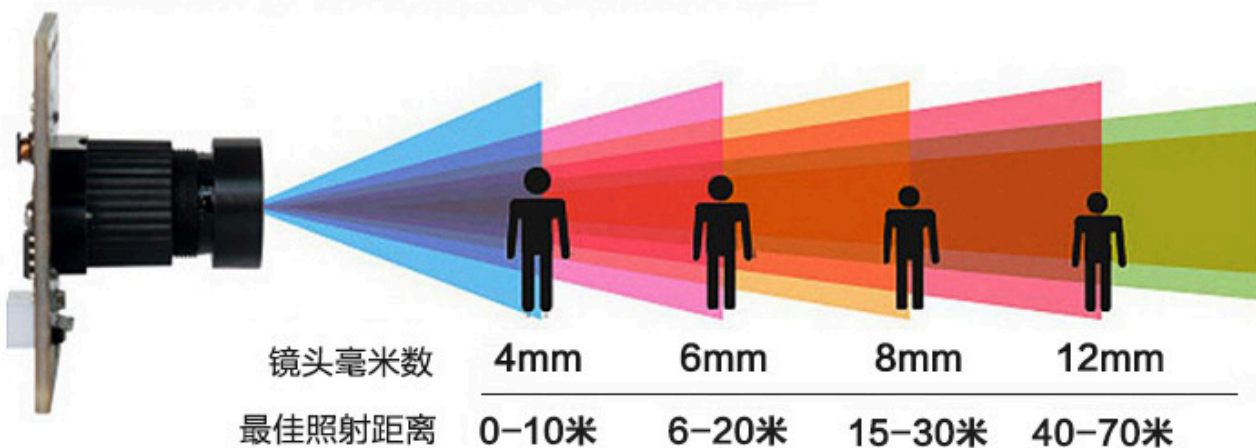

适配多种系统

WinXP / Win7 / Win8 / Win10 / MAC OSX / Linux Android均可适配
兼容性强，支持OTG、标准UVC协议、USB接口免驱、即插即用。

5
适配多种系统

