



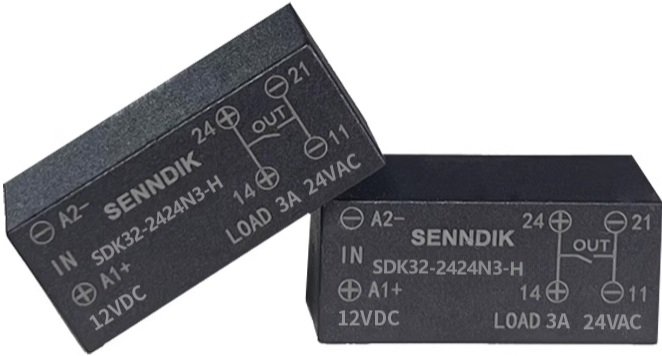

选型指南

SELECTION GUIDE

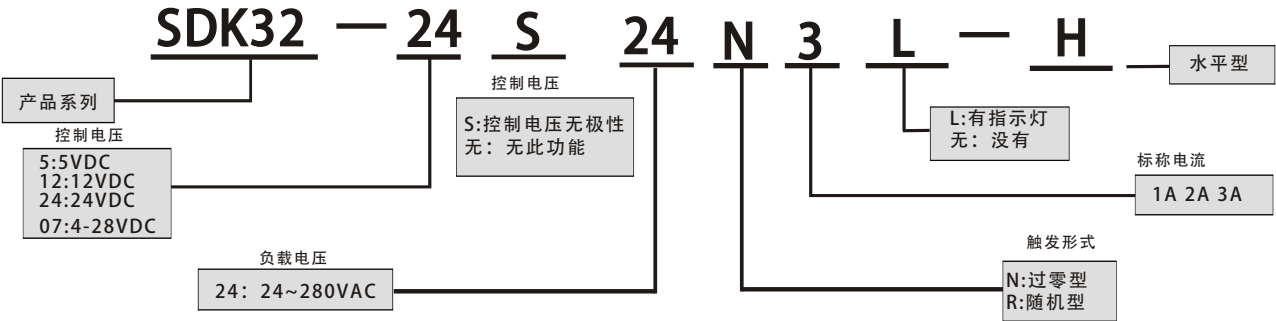


产品参数

PRODUCT PRARMETERS

| 产品型号             | 标称电流 | 负载电压      | 控制电压  | 触发方式 |
|------------------|------|-----------|-------|------|
| SDK32 1224Z3-H   | 3A   | 24-280VAC | 12VDC | 过零触发 |
| SDK32 2424Z3-H   | 3A   | 24-280VAC | 24VDC | 过零触发 |
| SDK32 1260DZ3-H  | 3A   | 5-60VDC   | 12VDC | 过零触发 |
| SDK3 2460DZ3-H   | 3A   | 5-60VDC   | 24VDC | 过零触发 |
| SDK32 2460DZ10-H | 10A  | 5-60VDC   | 24VDC | 过零触发 |
| SDK32 1260DZ4-H  | 4A   | 5-60VDC   | 12VDC | 过零触发 |
| SDK32 2460DZ4-H  | 4A   | 5-60VDC   | 24VDC | 过零触发 |
| SDK32 2424Z4-H   | 4A   | 24-280VAC | 24VDC | 过零触发 |
| SDK32 1224Z4-H   | 4A   | 24-280VAC | 12VDC | 过零触发 |


接线图

WIRING DIAGRAM

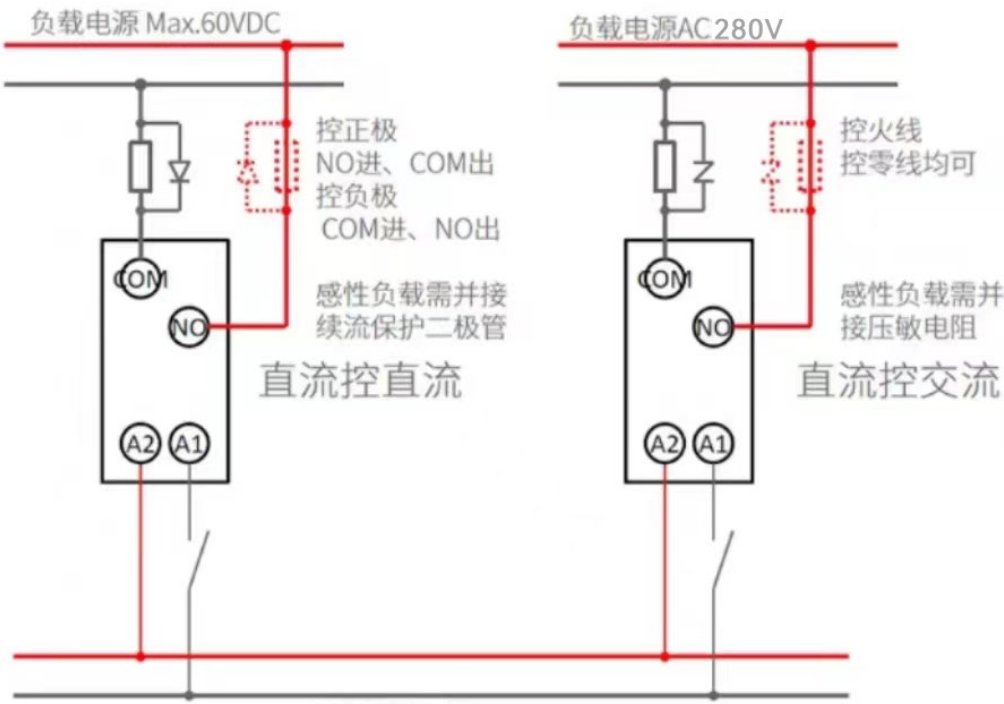


机械规格

MECHANICAL SPECIFICATIONS

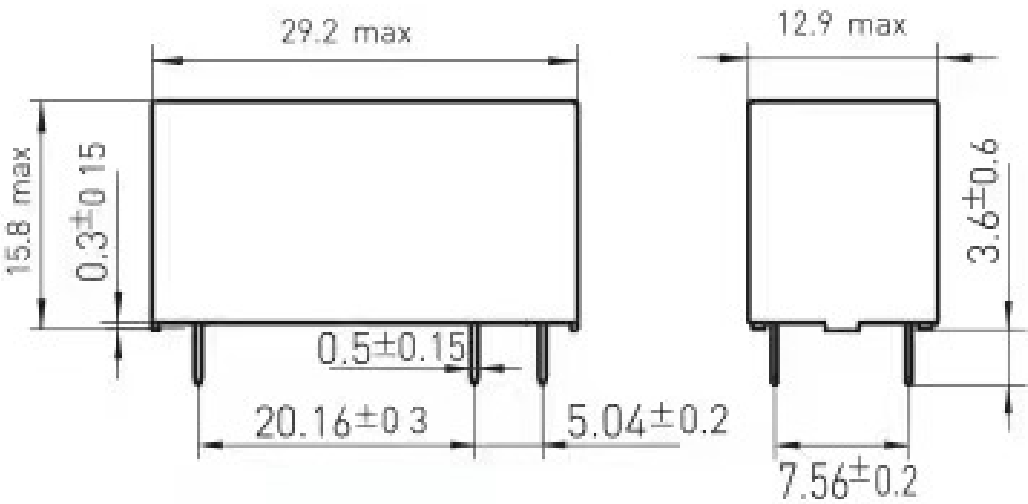





导轨底座尺寸

RAIL BASE DIMENSIONS

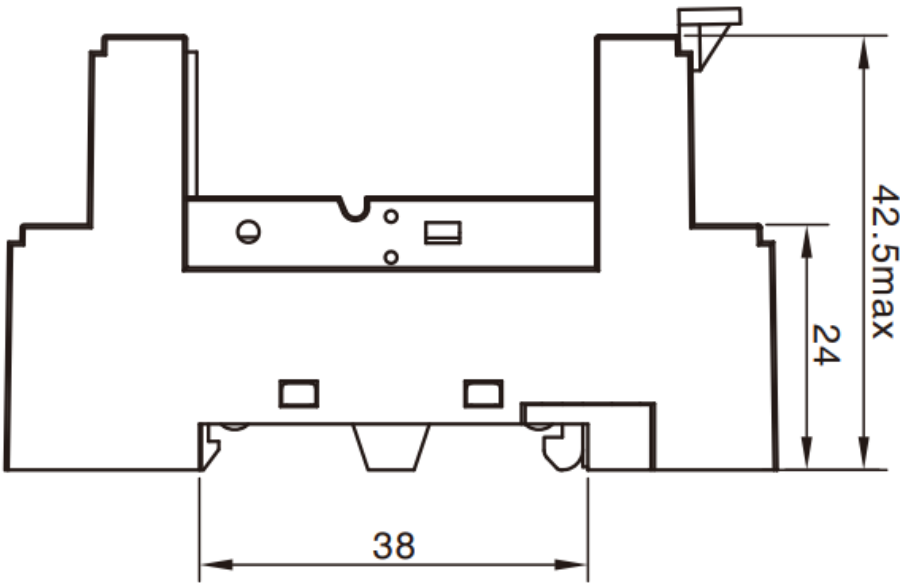

## 温度特性

## TEMPERATURE

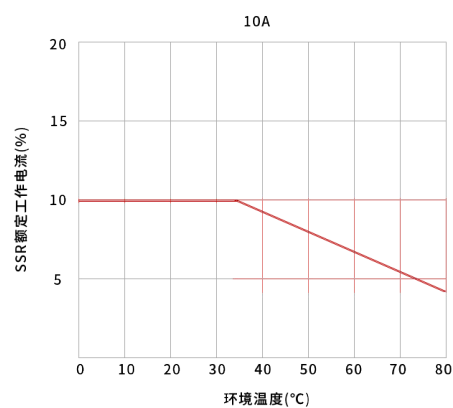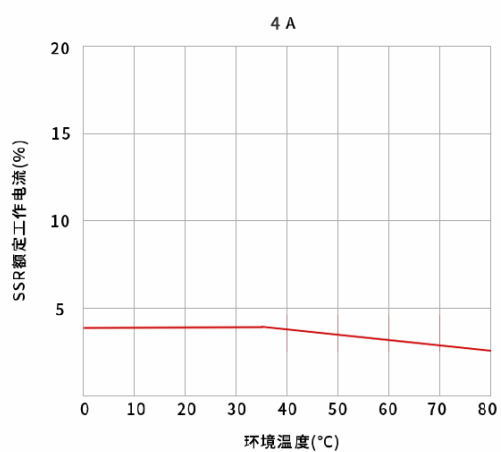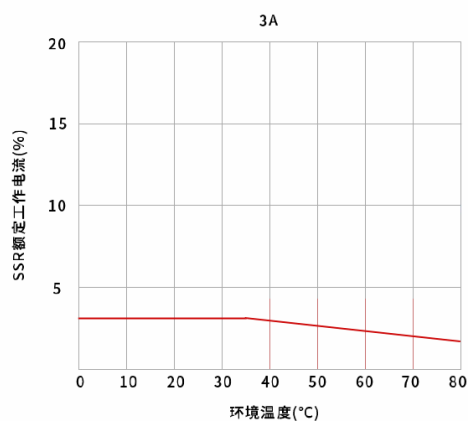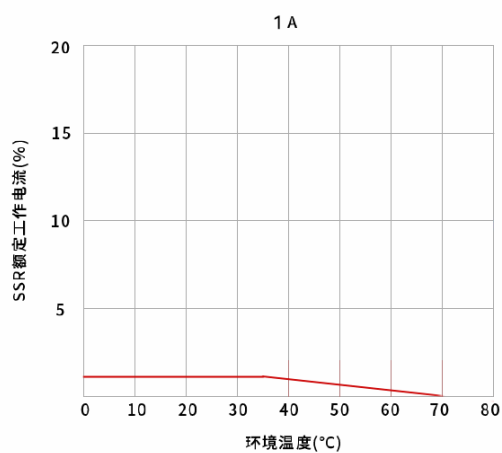

浙江申帝克电气有限公司

Zhejiang Shendike Electric Co., Ltd

全国服务热线: 400-888-9277

天猫: [www.Sennidik.tmall.com](http://www.Sennidik.tmall.com)官方网站: [www.zcximandun.com](http://www.zcximandun.com)