

SENNDIK®

SDK41 SERIES ULTRA-THIN SINGLE-PHASE SOLID-STATE RELAY


HAVING PROFESSIONAL RC PROTECTION



SINGLE PHASE SOLID-STATE RELAY WITH ULTRA-THIN BODY SHAPE

SELECTION GUIDE

SELECTION GUIDE

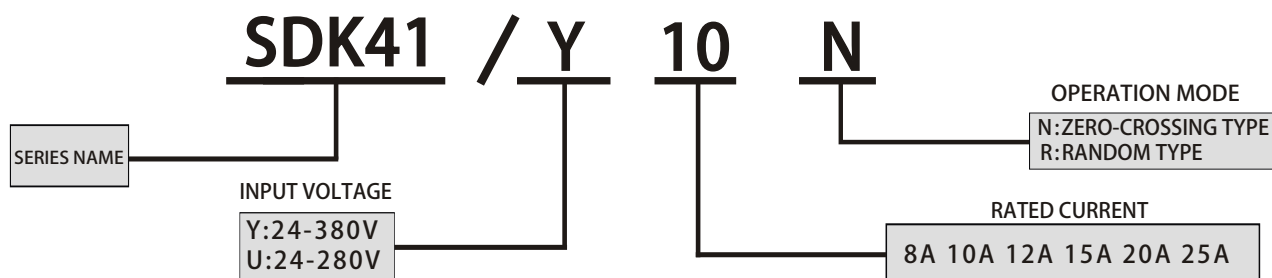

OUTPUT CHARACTERISTICS

OUTPUT CHARACTERISTICS

CHARACTERISTIC DESCRIPTION	BJS308ZG	BJS310ZG	BJS312ZG	BJS315ZG	BJS320ZG	BJS325ZG
OPERATING VOLTAGE (47~63Hz) [Vrms]	30~380	30~380	30~380	30~380	30~380	30~380
$I^2 t [A^2 \cdot S]$	80	100	120	150	200	250
TRANSIENT VOLTAGE[Vpk]	1000	1000	1000	1000	1000	1200
MINIMUM CRITICAL RISE RATE OF OFF-STATE VOLTAGE $dv/dt [V/\mu s]$	1000	1000	1000	1000	1000	1000
MAXIMUM OFF-STATE LEAKAGE CURRENT[mArms]	<5	<5	<5	<5	<5	<5
MAXIMUM ON-STATE VOLTAGE DROP[Vpk]	<1.5	<1.5	<1.5	<1.5	<1.5	<1.5
RATED CURRENT[Arms]	8	10	12	20	25	40
MAXIMUM HALF-CYCLE(1/2 Cycle)SURGE CURRENT(50/60Hz) [Apk]	120	120	120	250	250	400

CONTROL CHARACTERISTICS

CONTROL CHARACTERISTICS

CONTROL CHARACTERISTICS	
CONTROL VOLTAGE RANGE	4~32 VDC
MINIMUM TURN-ON CONTROL VOLTAGE	4 VDC
MAXIMUM TURN-OFF CONTROL VOLTAGE	2.5 VDC
MINIMUM INPUT CURRENT	8mA
MAXIMUM TURN-ON DELAY	1/2 Cycle + 1ms
MAXIMUM TURN-OFF DELAY	1/2 Cycle + 1ms

GENERAL CHARACTERISTICS


GENERAL CHARACTERISTICS

GENERAL CHARACTERISTICS	
Insulation voltage between input and output terminals, and between output and base plate (50/60Hz)	>2000Vrms
Working environment temperature range	-40℃~+80℃
Storage environment temperature range	-40℃~+80℃

单位：mm


PRODUCT DIMENSIONS

PRODUCT DIMENSIONS

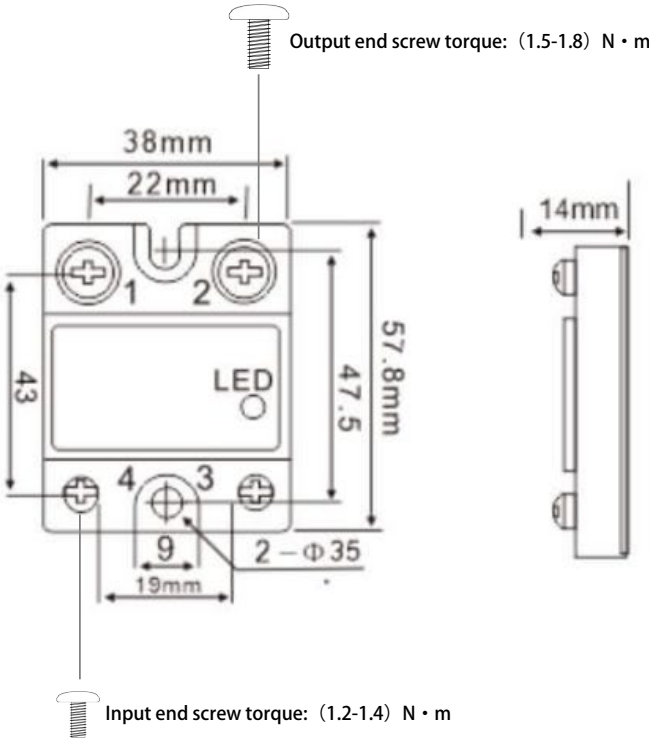



WIRING DIAGRAM





SCHEMATIC DIAGRAM OF WIRING

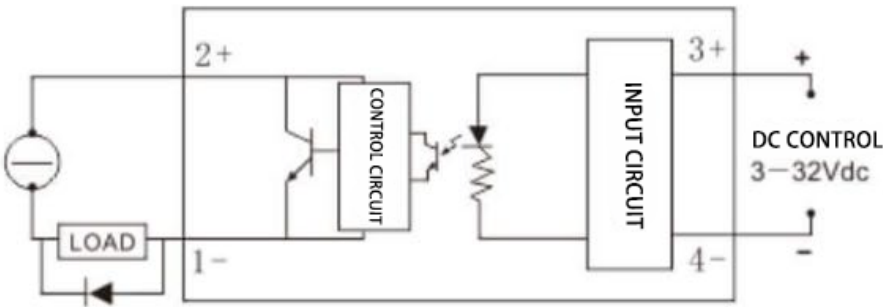

TEMPERATURE CHARACTERISTICS

TEMPERATURE

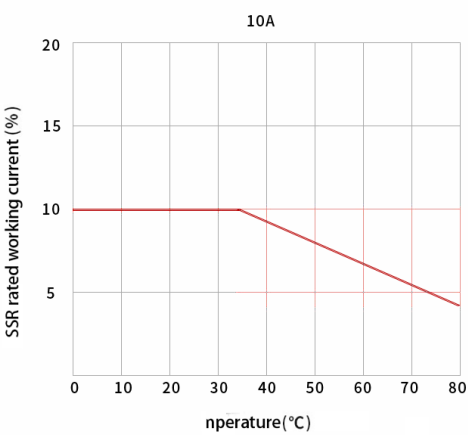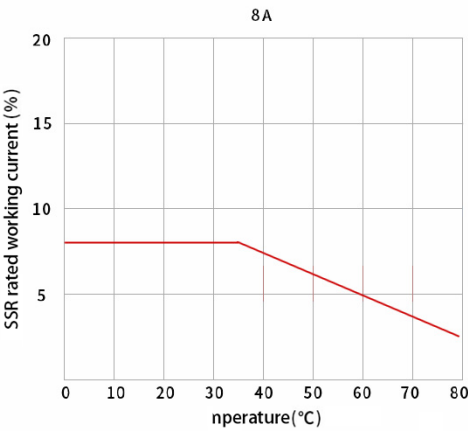

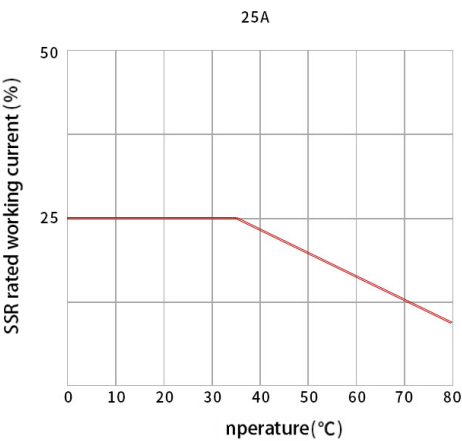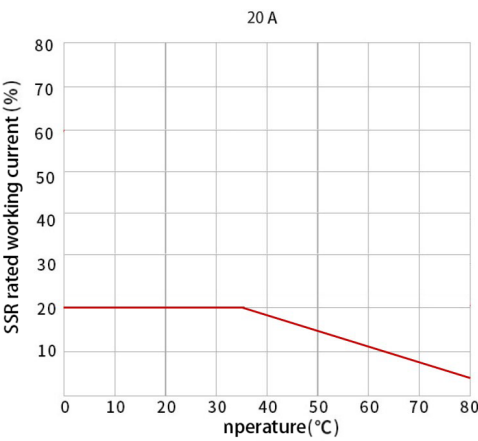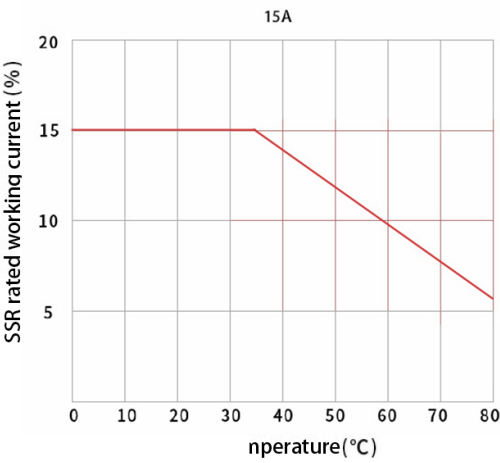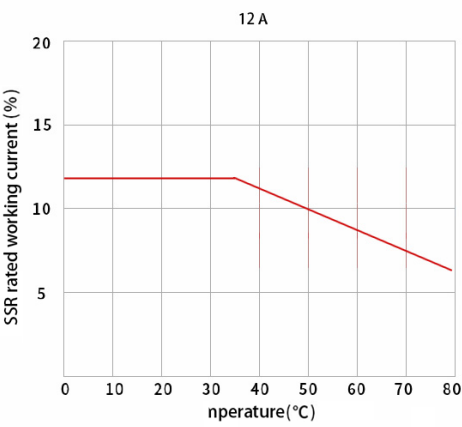

浙江申帝克电气有限公司

Zhejiang Shendike Electric Co., Ltd

全国服务热线: 400-888-9277

天猫: www.Senndik.tmall.com

官方网站: www.zcximandun.com

地址: 浙江省乐清市百亨路5号