

SENNDIK®

SDK43 SERIES ULTRA-THIN SINGLE-PHASE SOLID-STATE RELAY

HAVING PROFESSIONAL RC PROTECTION



SINGLE PHASE SOLID-STATE RELAY WITH ULTRA-THIN BODY SHAPE

-APPLICATION SCENARIOS

MAINLY USED IN RUBBER AND PLASTIC PRODUCTS,
COMMERCIAL KITCHEN APPLIANCES,
INSTANT WATER DISPENSERS, COFFEE MACHINES,
AND OTHER EQUIPMENT.



■ PRODUCT INTRODUCTION

SDK43 is a panel mounted AC solid-state relay with an input control voltage of (4~32) VDC, output currents of 5A, 10A, 20A, and 25A, and a load voltage range of (24-280) VAC and (24~380) VAC. The product has a compact structure and small size, with photoelectric isolation between input and output, and a dielectric withstand voltage of up to 4000VAC. Built in RC absorption circuit, sealed with epoxy resin.

This product has the following characteristics:

■ Built in RC protection

■ Photoelectric isolation

■ Dielectric Strength 4000V


■ Installation method of quick connect wire terminal

■ Panel installation

■ Bidirectional thyristor output




SELECTION GUIDE

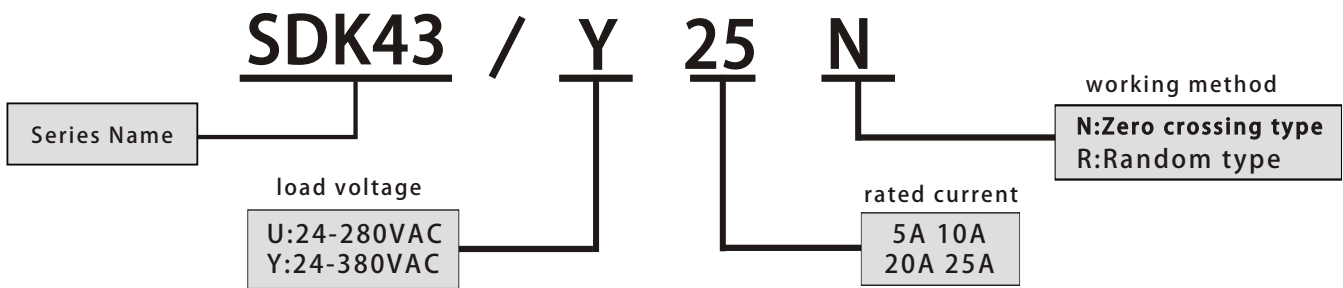



Product parameters(input)	
Control voltage range	4-32VDC
Connected voltage	4VDC
Turn off voltage	1VDC
Maximum input current	25ma
Reverse polarity voltage	-32VDC

Product parameters	SDK43/U**N	SDK43/Y**N
Working voltage range	24-280V	24-380V
Off state leakage current	1ma	
Minimum load current	0.1-25A	
Start time	1/2cycle+1ms	
Closing Time	1/2cycle+1ms	
Maximum output leakage current	5mA	
Maximum output voltage drop	1.5Vr.m.s.	
Maximum transient voltage VPK	600VPK	800VPK
Rise rate of off state voltage index	200V/ μ s	
Dielectric Strength	2500VAC,50Hz/60Hz,1min,Between input/output and substrate	
	4000VAC,50Hz/60Hz,1min,Between input and output	
insulation resistance	1000MQ(500VDC)	
Working environment temperature range	-30℃ ~+80℃	
Storage environment temperature range	-30℃ ~+100℃	



MECHANICAL SPECIFICATIONS

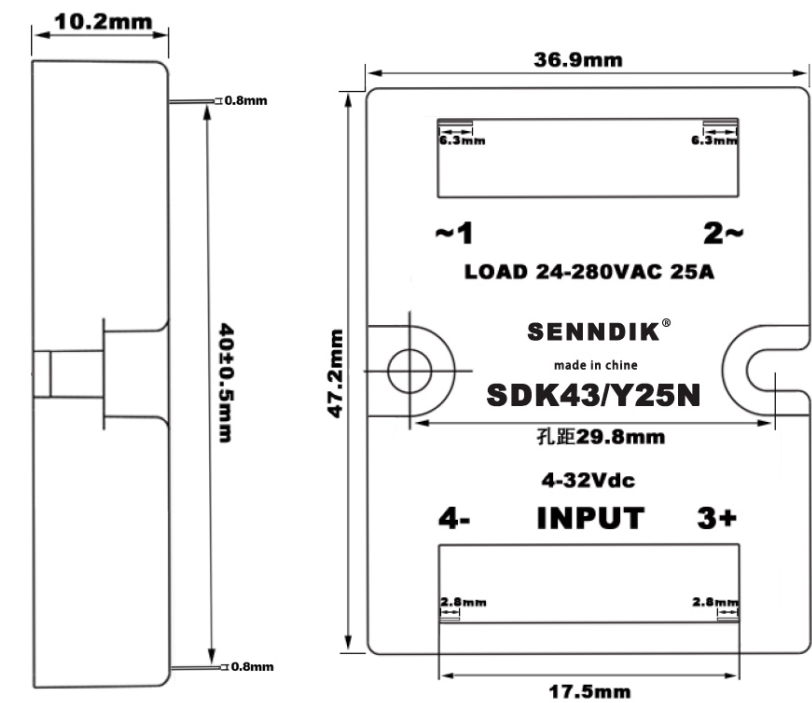

TEMPERATURE GRAPH

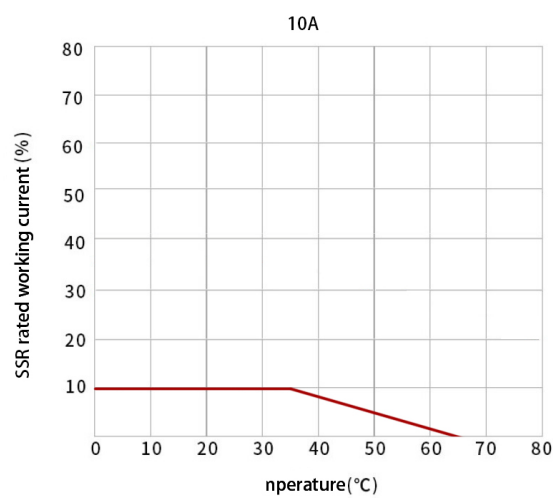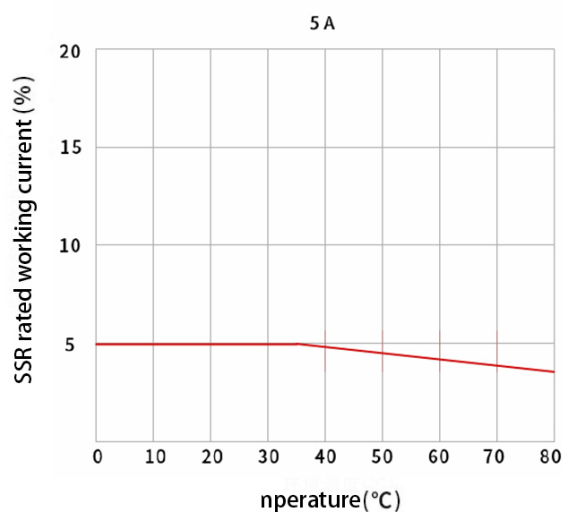

TEMPERATURE GRAPH

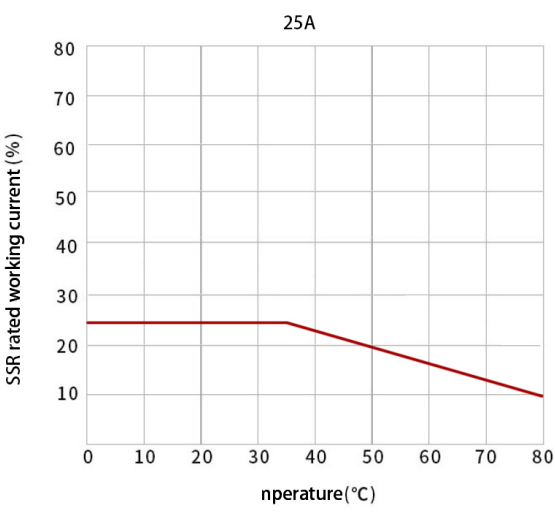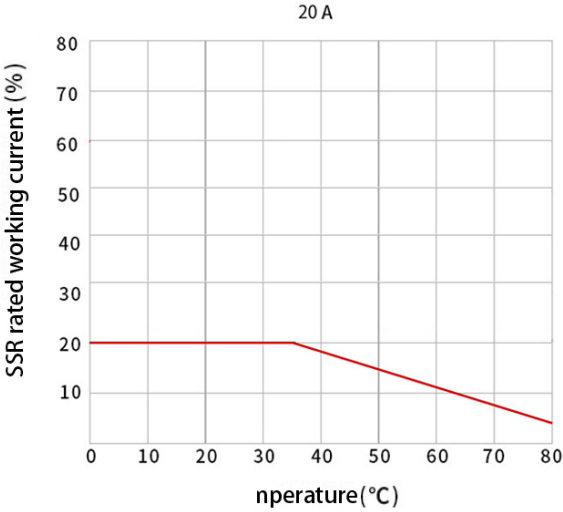

浙江申帝克电气有限公司

Zhejiang Shendike Electric Co., Ltd

全国服务热线: 400-888-9277

天猫: www.Sennidik.tmall.com

若有更改, 恕不另行通知

官方网站: www.zcximandun.com

地址: 浙江省乐清市百亨路5号