

A method for underwater sampling accounting for dilution

Sergio Cobo-Lopez, Heather Maughan, Breann Kirby, and Forest L. Rohwer

Abstract

Underwater measurements are important in field biology. Measurements are made from sites of interest that usually have a higher density of specific variables. This requires control over density, because of dilution rates

Introduction

Hypothesis and background

Knowledge gap

How to fill the knowledge gap

Methods

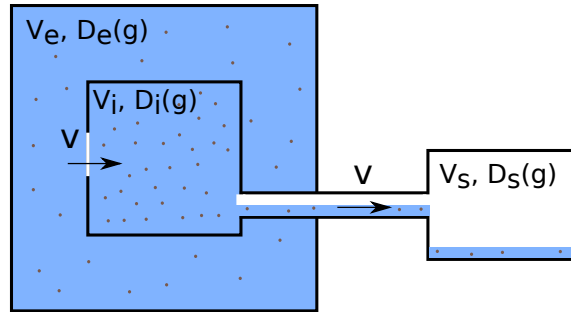


Figure 1: **The subaquatic sampling system consists of an environment (E), a system of interest (I), and a sample (S)** The system of interest (I) is a subset of the environment (E). The hypothesis is that the concentration of certain biogeochemical properties is larger in I than E ($D_I > D_E$). As I is sampled, D_I will decrease by water dilution

Input	Volume	Density
Environment	$V_E = \text{inf}$	$D_E = 10^6 \text{VLP/ml}$
System of Interest	$V_I = 1.4L$	$D_I = 10^7 \text{VLP/ml}$
Sample	$V_S = 0.5L$	$D_S = x$
Sampling rate	$v = 10 \text{ml/s}$	

Let I be a subaquatic system of interest in an environment E with a constant volume V_I (Figure 1) (for instance a coral reef in the ocean). Suppose g is a certain biogeochemical element that we believe it is present in I in higher concentration than in E , $D_I(g) > D_E(g)$ (dissolved organic carbon, for example). Also, suppose that $D_E(g)$ is known. Suppose that we take a sample S of g from I and extract water at a rate of $v \text{ml/min}$. Because I is a subaquatic environment, water from E is going to flow into I at the

same rate effectively diluting D_I over time. Given a sample S , with volume V_S and density D_S , how can we extract the initial concentration D_I ?

First, we want to get the concentration D_I as a function of time as we extract water at a rate of v . Because V_I is constant, only the mass M_I changes over time:

$$\frac{dM_I}{dt} = (-D_I(t) + D_E)v \quad (1)$$

Integrating, and dividing by V_I we get the density:

$$D_I(t) = D_E - (D_E - D_I(0)) \exp^{-\frac{v}{V_I}t} \quad (2)$$

In the case of the sample both the mass and density change over time:

$$\frac{dM_S}{dt} = D_I v \quad (3)$$

$$\frac{dV_S}{dt} = v \quad (4)$$

Integrating, we get:

$$M_S(t) = M_s(0) + vD_E t - (M_I(0) - D_E V_I) \exp^{-\frac{v}{V_I}t}. \quad (5)$$

For the volume:

$$V_S(t) = vT \quad (6)$$

Results

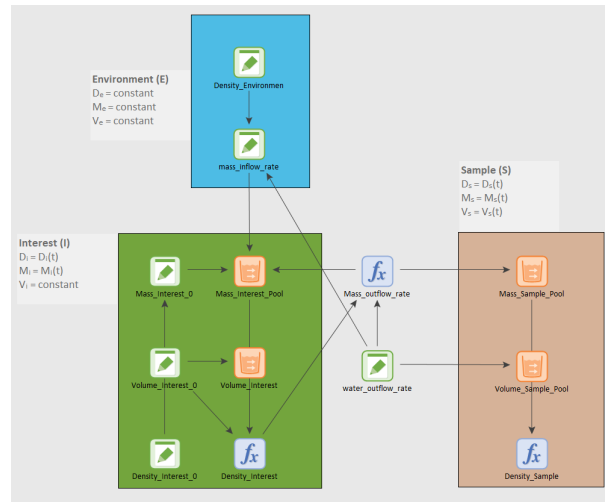


Figure 2: **GoldSim model of the sampling** The model integrates the mass, volume, and density of I and S over time

Discussion

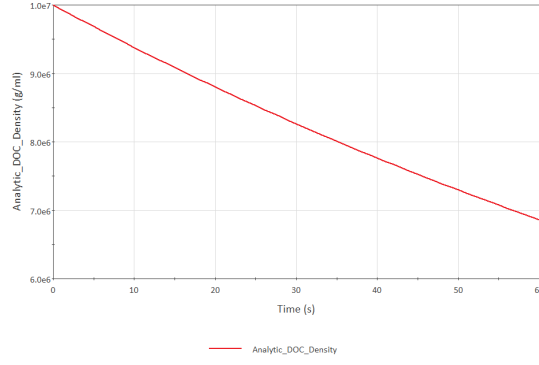


Figure 3: **Density of system of Interest (D_I) over time** D_I decreases exponentially to D_E , the density of the environment

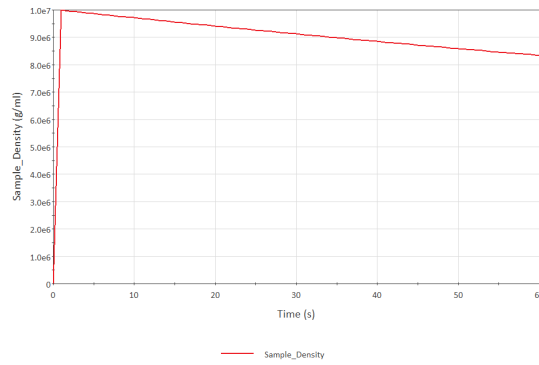


Figure 4: **Density of Sample (D_S) over time**