Evaluating the Digital Fault Coverage for a Mixed-Signal Built-In Self Test

by

Michael Alexander Lusco

A thesis submitted to the Graduate Faculty of
Auburn University
in partial fulfillment of the
requirements for the Degree of
Master of Science

Auburn, Alabama
May 10, 2011

Keywords: Built-In Self Test, Mixed-Signal, Testing

Approved by

Charles Stroud, Chair, Professor of Electrical and Computer Engineering
Foster Dai, Co-Chair, Professor of Electrical and Computer Engineering
Vashani Agrawal, Professor of Eletrical and Computer Engineering
Victor Nelson, Professor of Eletrical and Computer Engineering

Abstract

This thesis focuses on a digital Built-in Self-Test (BIST) approach to perform specification-oriented testing of the analog portion of a mixed-signal system. The BIST utilizes a Direct Digital Synthesizer (DDS) based test pattern generator (TPG) and a multiplier-accumulate (MAC) based output response analyzer (ORA) to stimulate and analyze the analog devices under test. This approach uses the digital-to-analog convertor (DAC) and the analog-to-digital convertor (ADC), which typically already exist in a mixed signal circuits, to connect the digital BIST circuitry to the analog device(s) under test (DUT).

Previous work has improved and analyzed the capabilities and effectiveness of using this BIST approach to test analog circuitry; however, little work has been done to determine the fault coverage of the digital BIST cicuitry iteself. Traditionally additional test circuitry such as scan chains would be added to the BIST circuitry to provide adequate fault coverage of digital circuitry. WHile ensuring that the digital circuitry is throughly tested and functioning properly, this scan chain circuitry incures a potentially high area overhead and performance penalty. This thesis focues on using the existing BIST circuitry to test itself by utilizing a dedicated gitial loopback path. A set of test procedures is proposed and analyzed which can be used to determine a set of functional tests which provide a high effective fault coverage of the digital porition of the BIST. TO determine the effectiveness of these procedures, the mixed-signal BIST circuit is simulated and single stuck-at gate-level fault coverage results are determined and presented. Finally several improvements to the dedicated loopback path are proposed and simulated to analyze possible ways to improve the fault coverage of the BIST with minimal area and performance impact.

Acknowledgments

Put text of the acknowledgments here.

Table of Contents

List of Figures

List of Tables

Chapter 1

Introduction

The testing of embedded systems is a large field with many different approaches and techniques. Some techniques work most effectively for digital systems and others for analog systems. One approach is a hybrid and is used to test a mixed-signal system – a system with both digital and analog circuitry. Mixed systems typically require the use of multiple testing techniques from both the digital and analog domains to be fully tested. In this chapter a short introduction to testing and relevant testing techniques for digital, analog, and mixed-signal systems is given so that the reader can develop a foundation for understanding the mixed-signal testing approach studied in this thesis.

1.1 Why Test Circuits

According to Stroud[1] there are three phases of a product where testing is of critical importance: the design phase, manufacturing phase, and the system operation phase. Each phase of the product's life cycle uses testing to achieve different goals. During the design phase of the product life cycle, the goal is to focus on finding and eliminating design errors. During manufacturing the goal changes and is focused on eliminating manufacturer defects, and finally the operation phase is focused on ensuring error-free operation. All of these different testing goals work to improve the device by reducing costs, improving relability, etc.

1.2 The Basics of Testing

The basics of testing a circuit are similar during all phases of a product's life-cycle:

- Generate a set of input stimuli or vectors

- Apply those vectors to the DUT

- Compare the output of the DUT to the expected output for each input value

- Note any discrepancies as indication that there is an error in the device (a fault)

In reality it is often more difficult to test circuits than this basic process makes it appear. One way to ease this difficulty is by using design for testability (DFT) techniques to increase the observability and controllability of a device during the design process[1]. Stroud defines observability and controllability in [1] as the following:

> "Controllability is the ease with which we can control a fault site and observability
> is the ease with which we can observe a fault site.[1]"

Ultimately these properties determine the complexity of testing a circuit. As chips grow it becomes increasingly challenging to maintain an acceptable level of controllability and observability. According to [3]:

> "The growth rate in integrated circuit (IC) transistor count is far higher than
> the rate for IC pins and steadily reduces the accessibility of transistors from chip
> pins – a big problem for IC test.[3]"

Large, modern circuits can contain billions of transistors and comparatively few IO pins[3]. Without careful design considerations these properties can negatively affect the testability of a device[1].

There are many different methods to physically testing a device. Each method varies in its requirements and has its own unique set of challenges, costs, and advantages. One traditional method of testing uses automatic testing equipment. Automatic test equipment is commonly used during manufacturing to verify chips are manufactured without defects[3]. Unfortunately as the complexity and speed of IC's has increased, automatic testing equipment has struggled to maintain an acceptable test coverage of performance-related defects[3].

2

To test these more complex circuits requires more advanced and higher speed automatic test equipment with additional IO capabilities[3]. [3] examines the cost of high-end automatic test equipment and finds they may become cost prohibitive for complex circuits. [2] estimates that without the inclusion of alternative testing approaches "tester costs will reach up to $20 million dollars in 2010". One such alternative to more expensive testing equipment is Built-in Self-Test. BIST describes the technique of designing a device to test itself[1] and can complement or eliminate the need for automatic test equipment[3].

1.3   Built-In Self-Test

[1] defines BIST as a circuit which can test itself and determine whether it is "good" or "faulty." In essence this entails designing the circuit to perform all of the steps in section 1.2 on itself. [1] continues by outlining the basics of a BIST architecture. This simple architecture consists of several major components including a Test Pattern Generator (TPG) which generates the input stimuli necessary to test the circuit and an Output Response Analyzer or ORA which compares the output of the circuit to the expected output for a given input value. Additionally there is circuitry which isolates the DUT during testing as well as circuitry which controls the test during execution (Test Controller)[1].

BIST has many advantages and disadvantages when compared to other techniques. [1] quantifies these advantages and disadvantages in Table 1.1. In addition [4] performs a detailed economic analysis of including BIST in circuitry. [4] concludes that:

> "As the product develops from the IC to system level and its complexity increases, so does the complexity of successfully identifying a failure's root cause. So it makes economic sense for system owners and perhaps system producers to implement BIST.[4]"

The advantages of BIST and its ability to reduce test time and cost make it an excellent choice for testing devices[3].

Table 1.1: Advantages and Disadvantages of BIST[1]

Advantages	Disadvantages
Vertical testability (wafter to system)	Area overhead
High Diagnostic resolution	Performance penalties
At-speed testing	Additional design time & effort
Reduced need for automatic test equipment	Additional risk to project
Reduced test development time & effort	
More economical burn-in testing	
Reduced manufacturing test time & cost	
Reduced time-to-market	

1.3.1 Digital Systems and Faults

Faults in a system are characterized by a fault model. A common model used for digital systems (systems functioning at discrete '1' and '0' logic values) is the gate-level stuck-at fault model[1]. According to [1], the stuck-at fault model allows for faults at the input or output of a digital logic gate. These faults can cause the input or output to be stuck-at a logic value '0' or '1' regardless of which value is applied or expected.

Figure 1.1 provides a truth table listing the faulty and fault-free output of an AND gate with its 'A' input stuck-at '1'. The 'X' notation is used to indicate the location of the fault and the 'SA1' (or 'SA0') designates rather the fault is a stuck-at '1' or stuck-at '0'[1]. The truth table given in Figure 1.1 shows how a single fault can change the behavior of a gate often having a major impact on the overall behavior of the circuit. Since digital circuits will always produce the same outputs for a given set of inputs, any difference between the expected and

Inputs (AB)	Fault Free Output (Z)	Faulty Output (Z)
0 0	0	0
0 1	0	1
1 0	0	0
1 1	1	1

Figure 1.1: AND gate with input A stuck at 1

actual output can be exploited to determine if a circuit is functioning correctly[1]. Each clock cycle an input vector is applied and the output is compared with the expected output. If any output does not match the expected output then the chip is considered faulty and discarded. Unfortunately the storage required to hold each input and expected output vector can be significant for large or complex chips and while feasible for costly automatic test equipment, it is often impossible due to area considerations when using a BIST approach[19].

When using BIST the input vectors are often generated by the TPG circuitry deterministically, algorithmically, or pseudo-randomly (among other methods)[1]. This keeps the size of the BIST to a minimum and removes the need for a large memory or other means of storing every input vector. Likewise it is impratical to store every expected output pattern and compare it to the actual output each clock cycle. To minimize storage requirements a signature is often used used to compress the output of the circuit into a single vector. Instead of comparing each output at the end of each clock cycle, the signature is generated during the test and compared to the expected signature at the end of a test[1][19]. A signature can be generated in a number of different ways and may be as simple as a counter counting the number of 1's or 0's which occur in the output, 1's or 0's counting, or as complex as using a large Multiple Input Signature Register[1]. The most appropriate signature generation method is dependent on the requirements and output of the design and can significantly impact the effectiveness of a BIST approach. If a method is used which does not produce a suitably unique signature then faulty circuits can escape detection[1][19]. The use of an expected signature to compress the circuit output allows for a significant reduction in storage cost as in most cases only a single comparison needs to be performed to verify the circuit[19].

Returning to the example in Figure 1.1, a simple BIST can be constructed to test the AND gate. In Figure 1.2 a 2-bit counter is used as the TPG to generate all of the inputs patterns possible for a two input AND gate: "00", "01", "10", and "11". Also in the figure the output of the AND gate is connected to the *Enable* of an additional 2-bit counter to count each '1' and produce a signature. The fault-free signature for this circuit is "01" since

5
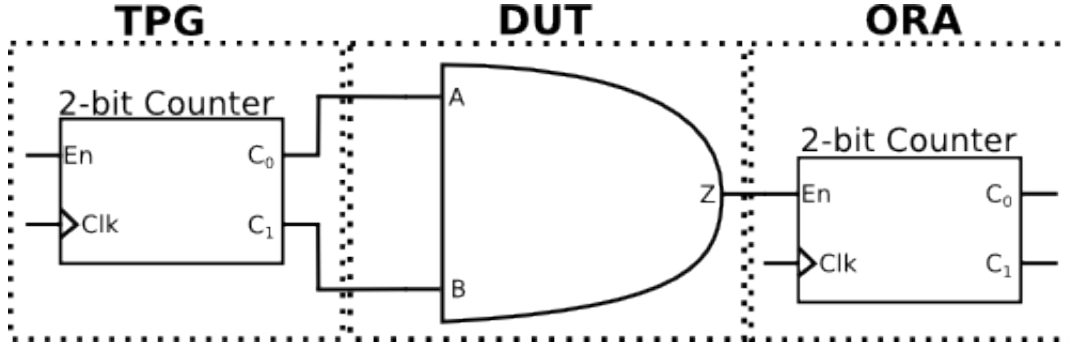
Figure 1.2: BIST for an AND Gate

a normally operating AND gate should only produce a single logic '1' when both its inputs are logic '1'. If any input is stuck-at '1' then it will produce at least one additional '1'; if any input is stuck-at '0' it will never produce a logic '1'. These two conditions will produce invalid signatures. During execute of the BIST sequence, the TPG counts from "00" to "11" and the 1's counter will increment for each '1' occurring at the output of the gate. At the end of the sequence, if the value in the 1's counter is not "01" then the gate is faulty. This example is greatly simplified and is missing required circuitry to start and stop the BIST as well as a method to isolate the inputs of the gate; however, it does demonstrate the general principal behind using BIST to test a digital circuit.

1.3.2 Analog Systems and Faults

Analog systems function differently than digital systems. Unlike a digital system which only has two discrete values, analog systems are continuous waveforms with multiple levels and voltages[5]. In addition to the complexities of analog waveforms, analog components operate within a range of acceptable values[5]. This difference makes testing analog components for defects (defect-oriented testing) significantly more challenging and requires a more complex fault model. In analog components faults are classified as either parametric (soft-faults) or catastrophic (hard-faults)[17]. Parametric faults are those which affect the performance of a specific component causing it to operate outside of its expected tolerance

range, for example a resistor which has a lower than expected resistance. In constrast catastrophic faults are those which cause a component to fail, such as resistor which is no longer conductive and appears as an open circuit[17]. The simulation of these different faults requires complicated and time consuming methods such as Monte Carlo analysis to determine different component values which allow fault-free circuit operation[5]. Compounding these issues is the fact that analog components

> "function collectively to perform the overall functionality of a given circuit and,
>
> as a result cannot always be treated as a collection of individual components[5]."

and consequently are difficult to isolate for effective defect-oriented testing[20]. Furthermore any circuitry added into an analog circuit may potentially interfere and change the operating range or output of that circuit[5]. This potential interferance requires that any analog testing circuitry be carefully simulated and verified to ensure it does not negatively affect the overal circuit performance. An example of a defected-oriented approach, oscillation testing is a testing approach which reconfigures the analog CUT so that it oscillates; this oscillation frequency is then measured and compared to an expected frequency. If the measured frequency falls outside the expected range, the circuit is considered faulty[18]. This method has been shown to be effective for the detection of catastrophic faults and some parametric faults; however, it can require a significant amount of planning and design effort as it may significantly impact the analog circuitry[18][5].

A simpler (and preferred[5]) method for testing analog components is via functional testing. [6] defines functional tests as:

> "... those which measure a circuit's dynamic behavior ...[6]"

Functional or specification testing is achieved by performing a set of tests to determine if a system is operating correctly as defined by its specifications. This approach is used to test the entire analog system collectively instead of attempting to understand the implications of specific faulty components[20]. Specification testing may include the testing of

important analog characteristics such as frequency response, linearity, and signal-to-noise ratio (SNR)[5]; however, the characteristics which are important to test will vary between designs. To adequately test most analog components, multiple measurements of several different characteristics must be taken as a single characteristic is usually not sufficent to ensure fault-free operation[20]. This process may require extra development time as test procedures must be developed to test each characteristic and additional time is required to perform each test[20].

1.3.3   Mixed Signal Testing

In a mixed-signal environment both digital and analog systems coexist and interact. Due to the previously discussed differences in testing analog and digital systems, the testing of the analog and digital sub-systems is generally developed seperately and performed using using different test procedures and approaches[20]. Ideally a designer would like to limit any duplicate work and take advantage of a BIST approach which can be used to test both the analog and digital sub-systems.

[1] defines a BIST approach to testing mixed-signal systems shown in Figure 1.3. This BIST uses a digital BIST approach to functionally test the analog sub-system by measuring certain analog characteristics which can be used ensure that the circuit is operating within its specifications. This architecture is largely digital and thus can be integrated into the digital circuitry already in the system with minimal analog overhead. This prevents excessive interference with the analog circuitry, excluding multiplexors which faciltate the sending and retrieving of test values to and from the analog sub-system[1]. To test the analog circuitry, the BIST uses the existing Digital to Analog Converter (DAC) to convert digitally generated test patterns from the TPG to analog signals and the existing Analog to Digital Converter (ADC) to convert the analog response back into the digital domain for analysis by the ORA[1].

Figure 1.3: BIST approach for mixed-signal systems[1]

Figure 1.3 shows a basic version of this mixed-signal BIST approach using two multi-plexors. In this case one multiplexor is placed before the DAC to select between the BIST patterns and the system circuitry and a second multiplexor is positioned at the input of the analog system to select between the system level inputs and the analog outputs. These two multiplexors form a loop allowing the generated TPG pattern to be converted into an analog signal and propogate through any analog circuitry before being routed back through the analog inputs to the DAC for analysis by the ORA. While this implementation does allow testing of all analog components, it does not allow a high level of diagnostic resolution[5]. To obtain a higher diagnostic resolution, additional multiplexors can be added to further partition the system. Figure 1.4 shows an example of an implementation with three seperate multiplexed or loopback paths to facilitate a higher level of diagnostic resolution. In Figure 1.4 the shortest loop, the short dashed path, is a digital only path (digital loopback path) which can be used to test that the digital BIST is fault free. The next loopback path, the dashed path, connects the output of the DAC to the ADC bypassing any of the analog circuitry (from here on referred to as the bypass path). This allows the verification of the ADC and DAC separately from the analog circuit. The final path is the analog test path, the dotted path, and is similar to the path in Figure 1.3 in that it is responsible for testing the analog circuitry. There is no limit to the number of multiplexors that can be added

9
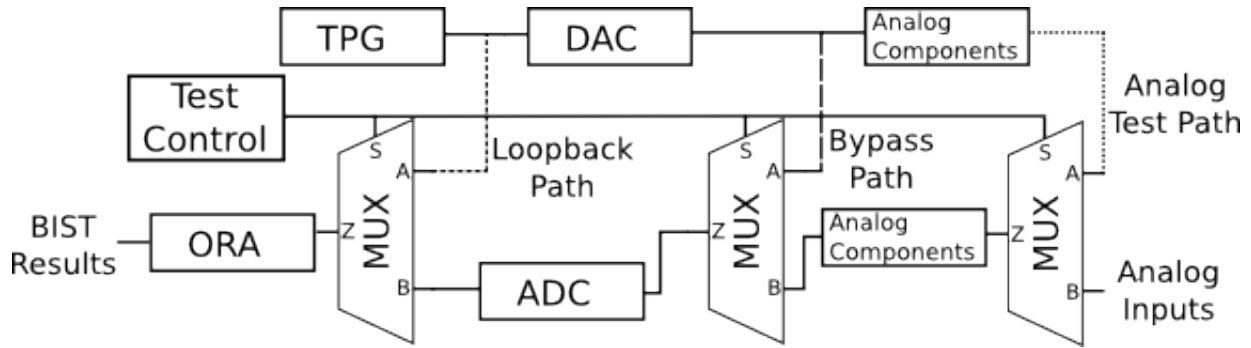
Figure 1.4: Mixed-Signal BIST with multiple loopback paths

to the system other than the increase in area overhead[5]. Additional multiplexors could be added to the example in Figure 1.4 to further partition the analog circuitry and resolve faulty behavior to a specific portion of the analog cut.

In Figure 1.4 the digital loopback path is of particular importance. [7] has shown that a digital loopback path is highly advantageous when testing the digital portion of the BIST circuitry. In a digital only environment the BIST produces exactly one output for a given set of inputs; however, without the digital loopback path the TPG outputs are not directly observable. To observe the outputs of the TPG requires conversion via the DAC and reconversion via the ADC. This will cause variations in the expected results due to the inherent variations which occur in analog signals and circuits. To account for these variations, a range of acceptable values must be considered instead of an exact signature[7].

Figure 1.5 shows a comparison of the maximum achievable digital fault coverage versus the allowed distance away from the expected good signature for different ORA designs. In the figure, three different 8-bit ORA accumulator designs are considered (ORA design is discussed in more detail in the next chapter). Figure 1.5 shows that regardless of design a (in some cases significant) reduction in the maximum achievable fault coverage is to be expected when a range of good values is considered instead of an exact signature. Thus the only way to achieve the maximum fault coverage is to not use a range of acceptable values and perform a digital only test. This requires the digital loopback path[7]. Performing a
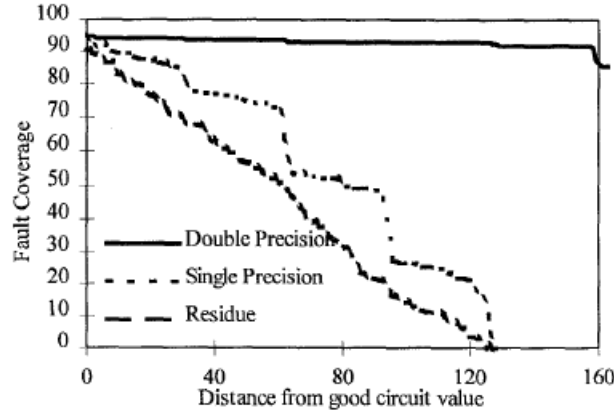
Figure 1.5: Fault Coverage v. Acceptable Value Range[7]

digital only test separates the digital and analog systems when testing. This allows for the usage of tools and techniques which target digital components separately from those used to generate the analog functional tests on the analog sub-system[7]. When the three loopback paths shown in Figure 1.4 are present, the test procedure should be performed first over the digital loopback path to verify the digital BIST, then using the bypass path to verify that the ADC and DAC path are functioning correctly, and finally over the entire circuit to verify the analog DUT[5][7].

Though this technique still requires the separate testing of the analog and digital circuitry, it is an improvement over the previously discussed method since the same BIST circuitry can be used to test both the digital and analog circuitry[1]. This limits the amount of work that must be duplicated to the determination of which tests to be run and the expected values. Furthermore the basic procedure for testing the analog and digital circuits is the same (the only differences being which loopback path is selected and the actual test being performed) which will limit the differences between test sessions.

1.4   Summary

In the previous chapter a highlevel look at both digital and analog systems has been given as well as the challenges of testing these systems for faults. The concept of BIST

has been presented along with its advantages and a simple BIST architecture. In addition the challenges of testing mixed-signal systems has been discussed and a basic mixed-signal BIST model has been given along with the challanges of testing the BIST without a digital loopback path. In the next chapter a more detailed explanation of fault simulation and of the specific mixed-signal BIST approach studied in this thesis is given. This approach builds upon the simple architecture discussed in the previous section and addresses the challenges discussed in Section 1.3.2. Building upon this explanation, Chapter III explores the main topic of this thesis: testing the actual mixed-signal testing circuitry to determine the level of fault coverage achievable. The results of this testing, an examination of the effectiveness of these tests, and potential areas for improvement are explained in Chapter IV, before a summary and conclusions are given in Chapter V.

Chapter 2

Background

Before discussing the testing of the studied mixed-signal BIST approach, it is important to have a more thorough understanding of fault simulations and how they are performed. Specifically the different types of fault simulations will be discussed including uncollapsed and collapsed as the bridging fault model which models faults between nets. Following this discussion a more detailed outline of the simulation and design process will be given. In the following section the fault simulator AUSIM is detailed which was used to evaluate the mixed-signal BIST approach in Chater 3. This chapter concludes with a detailed discussion of the mixed-signal BIST architecture and its capabilities.

2.1 Fault Simulations

Before discussing some of the specific nuances of fault simulation, it is necessary to have a basic understanding of several of the key important concepts. The simulation process begin with a netlist. A netlist defines the structure of a circuit by outlining the gates and interconnections between those gates in a file[**?**]. This netlist can be generated in a number of different ways using any number of different tools, specifics of this process will be explained in Section 2.1.3. Using the netlist of the design the next step is to develop a set of test vectors to be used to stimulate the circuit. As discussed in the previous chapter the test vector input will be applied to the inputs of the circuit during simulation and the output recorded. Before performing the fault simulations the expected circuit output must be known for the test vector set. In some cases this is generated at the same time as the test vector set, particularly when using an Automatic Test Pattern Generator (ATPG) to create the test patterns. If it is not known, then logic simulation must be performed to record the fault-free

output of the circuit. This output will be used later during fault simulations to determine rather or not a fault is detected. After logic simulation is performed and the expected output of the circuit is known, fault simulation can begin.

Fault simulation starts with the selection of a fault model. There are several different fault models used for digital circuits such as the gate-level stuck-at fault model discussed in Chapter 1. For now we will focus on the gate-level stuck-at model; however, different fault models target different types of faults and each have their advantages and disadvantages. The bridging fault model will be introduced in Section 2.1.2 which focuses on faults which occur between nets as opposed to those that occur at gate inputs and outputs[?]. The transistor fault model is more complex than the gate-level model and targets faults that occur at each individual transistor. This level of detail also makes it more computation expensive compared to the gate-level fault model and due to time constraints this model was note used for the simulations in this thesis; however, the transistor fault model more accurately represents the types of faults which occur in a CMOS process[?]. Regardless it is more common to use the gate-level stuck-at model for digital fault simulations since it is less computationally expensive and fairly accurately represent the faults which effect a digital system[?].

Once a fault model is choosen each fault must be simulated and the output of the circuit recorded and compared to the previously determined fault-free circuit output. If any output doesn't match then that fault is recorded as detected. For a large number of faults or large number of test vectors this process can take a large amount of time to complete. Equation ?? shows the time necessary to complete fault simulation in the simplest case. There are a couple of methods which can decrease the amount of time taken to simulate a list of faults. One common method is fault dropping[?]. When using fault dropping a fault is only simulated until a discrepancy between the output of the circuit and the expected output is found. At this point, simulation stops and a new fault is simulated. The time required to perform fault simulation when using fault dropping is shown in Equation ??. In the case

where a fault is detected early in the simulation, this process can greatly cut down on the amount of time used for simulation; in contrast, if a fault is detected towards the end of the simulation then the time saved will be less. The main drawback to using fault dropping is the loss of the ability to determine how many times a fault is detected by a test; fortunately, the main concern is the detectably of the fault in most cases[?].

Further speed up come be obtained by performing parallel fault simulation. In Equation ?? shows the time for serial fault simulations where a single fault is simulated at a time. To increase the speed up the simulation it is beneficial to simulate multiple faults at the same time. This is a common approach to increasing simulation time and at least in the case of gate-level stuck-at fault simulation, has no negative impact. Commonly 32 or 64 faults, corresponding to the bit-width of an integer on a 32-bit or 64-bit machine, are simulated in parallel. Equation ?? defines the time required to perform parallel fault simulation and Equation ?? defines the time required to perform parallel fault simulation with fault dropping. Using both these methods will greatly decrease the simulation time required and in fact is these methods are used in the fault simulations performed in this thesis. To further increase the speed of fault simulations certain optimizations are possible to reduce the set of faults to be simulated.

2.1.1 Collapsed vs Uncollapsed Faults

When performing fault simulations certain optimizations can be made to improve the efficency of the simulation. One such optimization is fault collapsing. With the single gate-level stuck-at fault model, each gate input and output can be stuck-at logic '0' or logic '1'. For elementary logic gates this leads to many faults which produce identicial faulty behavior; these faults can be said to be equivalent[1]. During simulation these equivalent faults can be collapsed, requiring only a single fault out of the group of equivalent faults to be simulated[1]. Depending on the circuit this can substantially reduce the number of faults to be simulated while still accurately representing the faults which can occur in the circuit[1]. Figure ??

shows an example of fault collapsing. The NOR gate has 6 uncollapsed faults; however, either input stuck-at '1' is equivalent to the output being stuck-at '0' (since a logic '1' is the controlling input for a NOR gate) which results in 4 collapsed faults. [1] states that the number of collapsed faults for any elementary logic gate with greater than one input is $K+2$ where K is the number of inputs to the gate. This is certainly apparent with the NOR gate in Figure ??, where $K+2=4$. Additionally when the output of a gate is connected to exactly one input of another gate, a fault occurring at the output of the source gate is indistinguishable from the same fault occurring at the input of the destination gate[1]. These faults can be collapsed together which leads to a large chain of faults being collapsed such as the example in Figure ??[1]. Unfortunately due to the limitation of the single stuck-at fault model which does not allow multiple faults to appear in the circuit simulatenously (as opposed to a multiple fault model which allows this), the fan-out stem in Figure ?? cannot be collapsed. Since the output of the invertor fans-out to the input of two different gates, collapsing these faults would make a fault appear to be on both the input of the AND gate and the OR gate. This would violate the single stuck-at fault model and as such as not allowed[1].

In the single stuck-at fault model the number of uncollapsed faults in a circuit are $2 \times G_{io}$ where G_{io} is the number of gate inputs and outputs in the circuit. In contrast the number of collapsed faults can be estimated by Equation 2.1 where P_o is the number of primary outputs, F_o is the number of number of fan-out stems, G_i is the number of gate inputs, and N_i is the number of inventors in the circuit[1].

$$F = 2(P_o + F_o) + G_i - N_i \qquad (2.1)$$

As an example, the BIST model evaluated in this thesis has a total of 83386 uncollapsed faults. It has 30 primary outputs, 4436 fan out stems, 27861 gate input, and 2740 invertors.

16

By using Equation 2.1 the number of collapsed faults in the BIST circuitry is 34053. This results in a 59% reduction in the number of faults to be simulated.

[1] discusses the advantages and disadvantages of using the collapsed of uncollapsed fault set for simulation purposes. According to [1] it is obvious that the simulation time can be greatly reduced by using the collapsed fault list. This is very advantageous as more simulations can be performed in the same amount of time. However, [1] does say that the uncollapsed fault list more accurately represents the possible defects which occur during manufacturing. Due to this difference, the fault coverage obtained with the collapsed fault list will be different than the coverage according to the uncollapsed fault list by a few percent[1]. Through the accuracy of the uncollapsed fault list is preferable, the collapsed fault list is more often used due to its decreased simulation time[1].

2.1.2 The Bridging Fault Model

2.1.3 Design Process

2.2 AUSIM Fault Simulation

2.2.1 ASL Netlist Format

2.2.2 Simulation Process

2.3 BIST Architecture

2.3.1 Selective Spectrum Analysis

2.3.2 ORA Multiplier-Accumulators

2.3.3 On-Chip Calculation Circuit

2.3.4 Interfacing with BIST

2.3.5 Auburn Simulation Language

Before a circuit can be simulated it must be converted to a format that AUSIM can understand. The Auburn Simulation Language (ASL) is the circuit description used by AUSIM[9]. ASL is used to provide a textual representation of a circuit at the gate-level to the simulator. This gate-level net-list is used to describe each connection and gate used in a circuit design and allows the simulator to build a representation of the circuit under test. ASL begins with a top-level circuit declaration. This declaration defines the name of the circuit and uses the in and out keywords to define the inputs and outputs to the circuit. An example circuit is given in Figure 2.1. Figure 2.1 A is a half-adder which takes in two inputs and outputs a sum and carry bit, the corresponding ASL description is given in Figure 2.1 B. As can be seen from the figure the circuit declaration is started by the *ckt* keyword. Each keyword in ASL is followed by a ':' character. Following the *ckt* keyword is the name of the circuit in this case "HF". Following that, the primary inputs and outputs are declared using
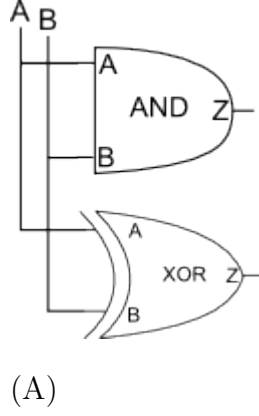
Half-Adder Circuit

1. # Half-Adder ;
2. ckt: HF in: A B out: S C ;
3. xor: X1 in: A B out: S ;
4. and: A1 in: A B out: C ;

(A)   (B)

Figure 2.1: A Half-Adder circuit

the *in* and *out* keywords. Each statement in ASL is terminated using a ';' character. After the circuit statement the gate-level description of the circuit is given. The format of each gate is similar to the format of the circuit statement:

GATE: Name **IN**: In1 In2... InN **OUT**: Out1 Out2... OutN ;[9]

All circuits in ASL follow this simple syntax. The and, xor, and dff gates are examples of gates which are built into AUSIM. All of the basic logic gates as well as the D flip-flop and two input multiplexer are provided automatically. Table 2.1 shows each gate and its inputs and outputs.

Table 2.1: Built-in AUSIM Gates[9]

AUSIM Keywords	
Gate	Example
AND	AND: a1 in: i1.. iN out: Z
OR	OR: o1 in: i1.. iN out: Z
NAND	NAND: na1 in: i1.. iN out: Z
NOR	NOR: no1 in: i1.. iN out: Z
NOT	NOT: n1 in: A out: nA
XOR	XOR: x1: in: i1... iN out: Z
MUX2	MUX2: m1 in: i1 i2 s1 out: Z
DFF	DFF: d1 in: CLK D out: Q

19

It is important to understand that custom gates can be implemented and used in a similar syntax. To do this one must use the *subckt* command. While an ASL file can only have a single circuit declaration, it can have any number of sub-circuit declarations[9]. Each sub-circuit has its own set of top-level inputs and outputs and its own gate-level net-list. Once defined the name of the sub-circuit can be used as a gate and be instantiated elsewhere in the circuit description.

2.3.6   Commanding the Simulator

AUSIM can preform many different operations pertaining to the circuit. For our purposes we will focus on the steps leading upto and including logic and stuck-at fault simulation. The AUSIM simulator is executed by providing a command file. This command file is a simple file which is a sequential list of commands to be executed by the simulator. Each command and its required parameters are given on each new-line. Before exploring the commands available, it is important to understand how AUSIM locates and uses pertinent files during execution. Each important file has a unique file extension which designates which type of file it is. This can include files such as *.asl* for ASL files or *.vec* for Vector files (explained in the next section) among many others. In the usual case all of these files would be named the same prefix and only differ in their respective file extensions. This allows the use of the *default* command to specify the filename prefix for AUSIM to use when attempting to locate or creating new files. AUSIM does provide the ability to override the filename for individual files if needed[8]. Table 2.3 provides a list of common AUSIM commands and their respective descriptions. Each command file is provided to AUSIM during execution as a command-line argument. As a simple example, a command file for a circuit called counter which performed a logic simulation could look like the following: This file would tell AUSIM to look for files prefixed with counter (such as counter.asl, counter.vec etc.) and to process the circuit description, audit the circuit for area and performance, and finally perform a logic simulation using the circuit and a vector file. The *simul8* command is one of two modes of

20

Table 2.2: Example AUSIM command file

default counter
proc
audit
simul8

Table 2.3: Common AUSIM Commands[8]

Command	Description
default prefix	Uses the prefix and the default suffix for each file
proc	Processes an asl file
audit	Performs area and performance analysis of circuit
simul8	Performs logic simulation
fltgen	Generates a fault list for the circuit
pftsim	Performs parallel fault simulation

execution that are important for this thesis. The *simul8* command stands for "simulate" which performs a logic simulation using the circuit (the other mode is fault simulation which will be discussed in Section **??**). Logic simulation applies a given set of inputs to the circuit for a given number of cycles and records the output. The inputs that are given are vector files and are discussed in the next section.

2.3.7 Test Vector Files

Once a circuit has been created in the ASL format the simulator needs to be given the appropriate input vectors to properly stimulate the circuit's inputs. These vectors are used for both logic and fault simulation (discussed in Section **??**). Understanding the vector files and how to create them is essential to using AUSIM and properly testing circuits.

Fortunately the vector file format is very simple. Generally a vector file should end in the *.vec* file extension and have the filename prefix that is set in the AUSIM command file[8]. In the vector file each line should include a test vector. Each test vector should be a binary sequence corresponding in length to the number of primary inputs in the ASL

21

Table 2.4: Example Vector File For Half-Adder

```
# Vector File ;
00
01
10
11
```

circuit. The number of test vectors should be equal to the length of the test the user wants to apply to the circuit. Each test vector that is applied will correspond to exactly one vector recording the outputs of the circuit after the circuit has settled (output is discussed in the next section). An example vector file for the previously mentioned half-adder (Figure 2.1) is shown in Table 2.4. This vector file applies four test vectors to the circuit.

This is great for simple circuits and short tests; however, for larger, complex circuits or long complex tests this can become difficult to use. AUSIM offers no way to generate large amounts of vectors (there is a random vector tool[8] but this is not always appropriate). To remedy this a tool was created to generate vector files from a simple command language.

2.3.8   Output Files

During logic simulation the output of the circuit is recorded into an out file. Like the vector file format, AUSIM's out file format is very straight forward. Each out file consists of a header created by AUSIM which labels each column of the file with the corresponding IO name. Following the header is the output of the logic simulation. Each output line consists of the test vector which was applied and the resulting output recorded from the circuit. An example out file for the half-adder example from Figure 2.1 is shown in Figure 2.5. As shown in the Figure, the top consists of the previously mentioned header labeling each column with its IO name (if an IO name is more than a single letter it is written vertically with one letter on each line). Following the header is the four vectors from Table 2.4 and the resulting output from logic simulation. Like the vector file this format works well for small circuits

Table 2.5: Example Half-Adder Out File

```
#   AUSIM (2.7) Simulation Results ;
#   AB   SC ;
    00    00
    01    10
    10    10
    11    01
```

and simple simulations; however, it can be a nightmare when verifying larger circuits. This is especially true of circuits with a large number of outputs or which use serial communication interfaces such as a Serial Peripheral Interface (SPI). For these more complicated interfaces a format which can be visualized greatly eases the difficulty involved in spotting easy to miss mistakes (such as an incorrect or invalid test vector) or invalid output. For these more complicated circuits (such as our BIST) a tool has been written to convert an AUSIM out file into a Value Change Dump or VCD.

2.3.9   Value Change Dump Format

The Value Change Dump Format is defined in section 15 of the IEEE 1364-1995 standard for Verilog[10]. Originally created as a light-weight format to dump simulation results for post-processing[10], the VCD format is a standard format and is tailored towards storing digital simulation results in as small as a footprint as possible. In addition as an IEEE standard it is supported in a number of free and commercial viewers which can easily visualize and navigate the underlying simulation data.

At its heart the VCD file stores simulation data in the same manner that the Vecgen markup defines test vectors. In contrast to the AUSIM out file format, the VCD format only stores changes in values[10]. While this makes the file less human readable, it makes it very easy to store large amounts of simulation data and for a viewer to parse and display
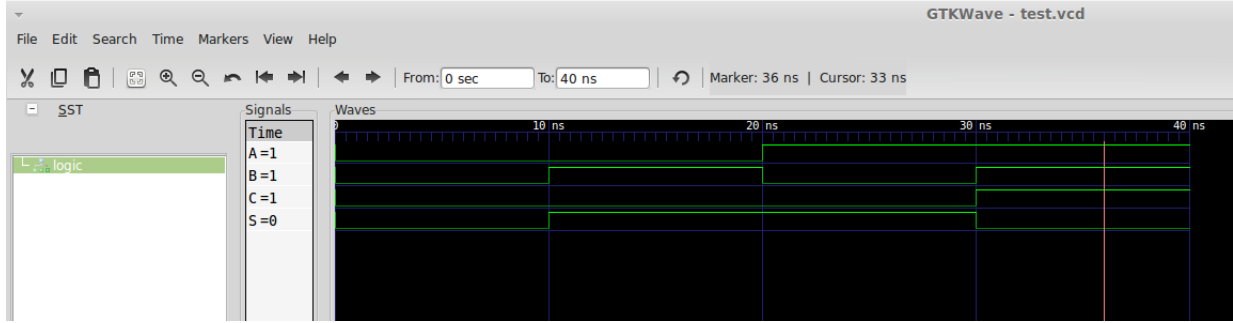
Figure 2.2: The VCD file visualized in the GTKWave Viewer

the file. Table 2.6[1] displays the output file converted into VCD format. This conversion was performed using the Out2VCD program developed by the author. The program is very straight forward and uses the following syntax:

OUT2VCD [-g groups.txt][2] input.out output.vcd

In the example in Table 2.6, the VCD file is much larger than the AUSIM out file format; however, for long simulations with many inputs and outputs the VCD format is much more compact. Regardless of the file length, the key benefit to conversion to the VCD format is the ability to visualize AUSIM's output in one of a number of commercial viewer applications. For the example in Figure 2.2 GTKWave was used. GTKWave is a free, open source VCD file viewer for Linux available on-line at `http://gtkwave.sourceforge.net`. In GTKWave each IO is displayed as a waveform. The displayed waveforms can be panned and zoomed. This functionality alone makes it much easier to verify the output of a complex simulation. This tool proved invaluable for verification of test vectors when testing the BIST.

---

[1]It is important to note while all IO in this example are a single bit, values in a VCD file can be any arbitrary width and in that case operate as a bit-vector

[2]The groups file is a list of IO prefixes which should be grouped together to form a bit vector. ie. if the file contained the prefix "color" then IO such as color1 color2 and color3 would be combined into color[2:0] in the VCD file

VCD File	Description
$date	The date section defines the day
Tuesday, December 07, 2010	which this file was generated
$end	
$version Generated For ASL2VCD 1.0	A comment detailing the
Alex Lusco	version of the generator for this file
$end	
$comment	
VCD File	An additional comment section detailing
$end	information about the file
$timescale 10ns **$end**	Defines the time scale for each value frame
$scope module logic **$end**	The Logic Module
$var wire 1 ! A **$end**	This section aliases each input with a single ASCII
$var wire 1 " B **$end**	character for long IO names this shrinks them to a
$var wire 1 # S **$end**	single character allowing for the ability to condense
$var wire 1 $ C **$end**	the dump for large simulations greatly
$upscope $end	
$enddefinitions $end	End of header
$dumpvars	Sets the initial value for each input
0!	Each line IO must be set here
0"	
0#	
0$	
$end	
#**1**	The #N construct denotes a time step to apply the
1"	following value changes at In this case 10ns
1#	simulation time
#**2**	This time its at 20ns
1!	
0"	
#**3**	30ns
1"	
0#	
1$	
#**4**	40ns

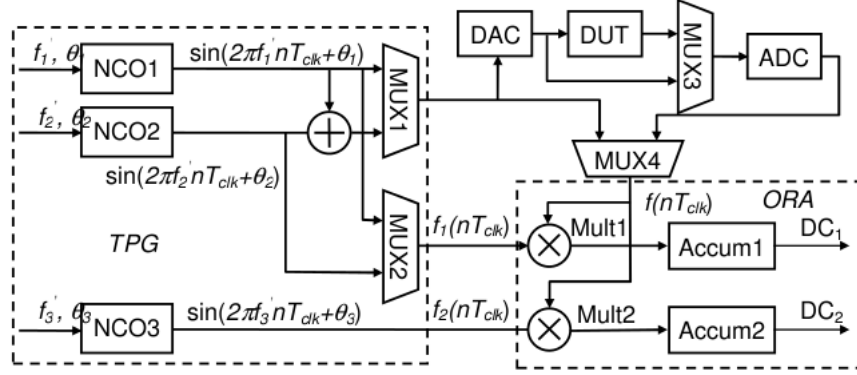Table 2.6: VCD File for Half-Adder Vectors

Figure 2.3: General BIST Architecture[11]

2.3.10   Fault Simulation

2.4   BIST Architecture

Our BIST architecture is a mixed-signal BIST approach which uses Selective Spectrum Analysis (SSA) to test analog circuitry. A block diagram of the basic architecture can be seen in Figure 2.3. This architecture is capable of measuring a number of different analog characteristics including frequency response and third-order interception point (IP3)[13]. In addition by sweeping through a frequency spectrum both Signal to Noise Ratio (SNR) and Noise Figure[12] and be measured. As seen in Figure 2.3 the BIST consists of a Direct Digital Synthesis (DDS) based TPG, Multiplier Accumulator (MAC) based ORA, and test controller (not shown). The TPG consists of three numerically controlled oscillators (NCOs) and utilizes the existing DAC in the mixed-signal system to generate the analog waveforms for testing[11]. Each NCO has a phase accumulator which is used to generate the output frequency[13]. By accumulating the phase word based on a given frequency word f each NCO will generate a frequency according to Equation 2.2[11]. The generated tones serve two purposes: one is to stimulate the analog DUT, and the second is to provide an in-phase and out-of-phase reference tone for the ORA[11]

$$f = \frac{f \times f_{clk}}{2^n} \tag{2.2}$$

26

The ORA architecture consists of two MACs. Each MAC receives the output from the DUT as well either the in-phase or out-of-phase signal from an NCO. Using this method the ORA is able to measure the amplitude and phase response at a given frequency[11]. Each test the BIST performs relies on this method of measurement. The tests and how they are run will be discussed in the next section.

In addition to the TPG and MAC-based ORA, there are a number of multiplexers in Figure 2.3. These multiplexers define different paths for sending and receiving signal to or from the DUT. As referenced in Section 1.3.3 these multiplexed loopback paths can be essential to achieving a high fault coverage when testing. In the architecture shown there are three loopback paths in the system. The first path is a path which passes a signal out through MUX1, through the DAC, through the analog DUT and returns it back through the ADC and into MUX4. This is the outermost path which stimulates the Analog DUT for testing. A second path exists similar to the first; however, instead of the output of the analog DUT, MUX3 instead selects the bypass path around the DUT. This bypass path be used to calibrate the BIST for any noise introduced by the DAC and ADC pair. The final path is the digital loopback path. In this path MUX4 selects the output from MUX3 directly. This path bypasses all analog circuitry including the ADC and DAC. As stated in Section 1.3.3, this is the path that is most important for our testing of the BIST. The digital loopback path does not introduce any analog error into the signal so when performing a "loopback test" the test will always result in the same accumulated value, no range of acceptable values is required[7].

2.4.1 Performing Tests

In a single measurement (where a measurement is defined as a single accumulation at a particular frequency) the BIST can measure the magnitude and phase of the DUT output at the measured frequency. To calculate these values Equation 2.3 is applied to the two resulting accumulation values one in-phase and one out-of-phase[15]. In the equation DC_1
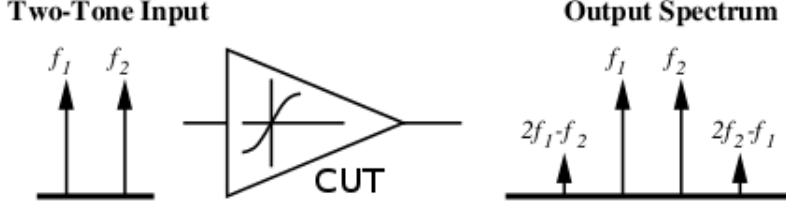
Figure 2.4: Two-tone test for IP3 measurement[11]

and DC_2 are the output of the two in-phase and out-of-phase accumulations.

$$
\begin{aligned}
A(f) &= \sqrt{DC_1^2 + DC_2^2}, \\
\Delta\phi(f) &= -\tan^{-1}\frac{DC_2}{DC_1}.
\end{aligned}
\tag{2.3}
$$

To perform more complex tests such as frequency response and IP3 (also called linearity) these measurements are performed repeatedly at different frequencies of interest and the results of each tests are used to calculate the result. As an example during a linearity measurement the DUT is driven by a two-tone signal which consists of two fundamental tones f_1 and f_2. Due to the DUT's nonlinearity, its output will consist of not only f_1 and f_2 but also the third order inter-modulation points (IM3)[11]. Figure 2.4 demonstrates what the input and resulting spectrum will look like[11]. The linearity (ΔP) of the DUT can be determined by the difference in dB between the fundamental frequency (either f_1 or f_2) and the IM3 tone[13]. To calculate this the BIST must take two measurements at either the two lower frequencies f_1 and $2 * f_1 - f_2$ or the two upper frequencies f_2 and $2 * f_2 - f_1$[11]. The result is the difference in the two measured magnitudes. The linearity test is just one example of how a measurement is made using this BIST architecture, in the next section more details will be discussed about how calculations are made on-chip and how the test controller is used to control and execute different BIST sequences. Before discussing the rest of the BIST architecture it is important to understand how the amount of time required for a measurement is determined. The accumulation is exceptionally important to achieving an accurate measurement due to potential AC calculation errors[15]. A large body of work

28

was put into determining both the appropriate length of time to accumulate and a method for determining the length of time efficiently in hardware. [15] and [11] discuss in detail the complexity of stopping accumulation at the correct moment to reduce the error. As it is only pertinent to this thesis as it relates to fault simulation time, it will only be briefly discussed here as in relation to test-time.

According to [15], there is a potential for calculations errors in an SSA approach. In an effort to minimize or the errors the BIST approach must either accumulate for a long period of time (referred to as free-run accumulation) or the accumulation time must be stopped at an integer multiple period (IMP) of the frequency being measured. As explained in [15] a good IMP occurs when using a M_{full} width phase accumulator at $2^{M_{eff}}$ accumulation cycles where M_{eff} is calculated in Equation 2.4, when m is the bit position of the least significant '1' in a frequency word[15].

$$M_{eff} = M_{full} - m \tag{2.4}$$

As an example, given a four bit wide phase accumulator and the frequency word 1010 (or decimal 10), M_{eff} would be equal to $4-1$ or 3. This makes the number of clock cycles before a good IMP 2^3 or 8. For large phase accumulators the number of clock cycles to accumulate can vary greatly depending on the frequency word chosen. In our BIST architecture with 16-bit phase accumulators, the difference between the shortest accumulation time of 2 clock cycles and than the longest accumulation time of 65535 clock cycles (which occurs when using any odd frequency word) is much greater. Another level of complexity occurs when doing a test which requires more than a single tone. For a multi-tone test the IMP must be the common IMP of all frequency words. In practice a simple method is used to determine the common IMP and subsequently the maximum number of clock cycles to accumulate. By logically OR'ing the frequency words together, our BIST approach uses an OR chain to directly determine the number of clock cycles to accumulate. Figure 2.5 shows the or-chain which calculates the number of clock cycles. The figure easily shows that a logic '1' in the LSB or 0th bit of the input produces a '1' on all the output bits (which corresponds to
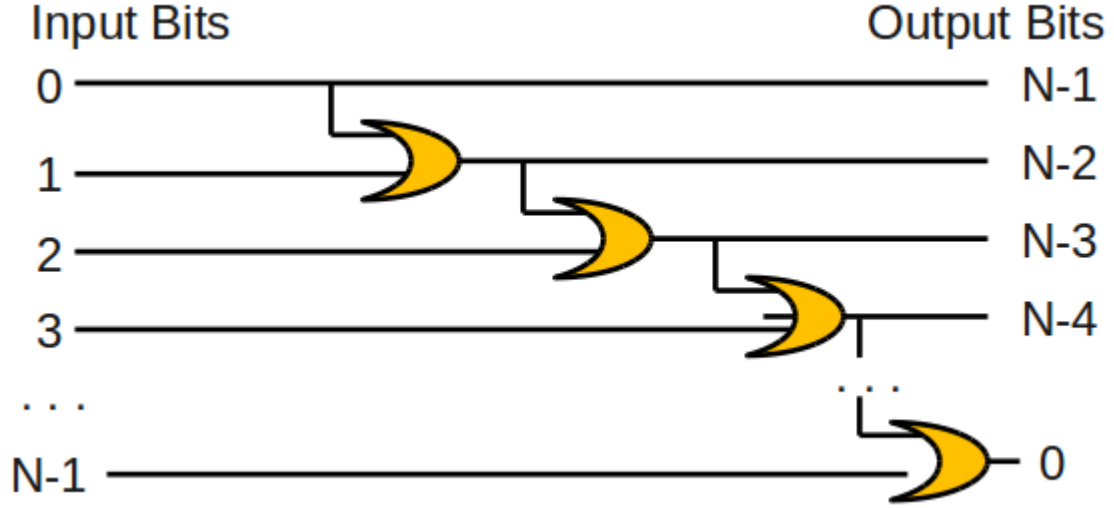
Figure 2.5: The OR Chain which calculates the number of clock cycles from the logical OR of all frequency words

the maximum number of clock cycles for a given phase accumulator size). Using this clock cycle count, the BIST uses a clock cycle counter to determine when to stop accumulation on an IMP and minimize the error. Once accumulation has completed the calculation step is triggered and the results are handed off the calculation circuit.

2.4.2   Calculation Circuitry

As discussed previously when the BIST is used to measure a frequency, the result is the in-phase and out-of-phase values measured at the given frequency (DC_1 and DC_2). While these values contain the magnitude and phase information about the measured frequency, they are in a format which is not intuitive and requires post-processing to determine the result. To calculate the magnitude and phase the previously discussed equations from Equation 2.3 can be used. While this provides a simple step to converting the DC_1 and DC_2 values to a more intuitive format, it requires manual post-processing to be completed. The circuitry that will be discussed brings the processing of the DC_1 and DC_2 on-chip allowing the magnitude and phase to be determined and output directly. In addition, with the help

of a sophisticated test controller the BIST is capable of taking more complex measurements (such as IM3 and SNR) and produce the output of those higher-order measurements directly.

[16] discusses the original implementation of the calculation circuitry for our BIST approach. Shown in Figure 2.6 the original calculation circuit uses a custom CORDIC developed by [16] to perform the operations from Equation 2.3 and determine the magnitude and phase from the DC_1 and DC_2 values. Also in this circuit is some additional circuitry to perform many of the higher level tests available to the BIST such as the previously discussed IM3 or linearity test. With the help of the test controller the calculation circuit presented by [16] can be used for IM3, spur search[3], signal-to-noise ratio, and noise figure (NF) tests. To do this multiple frequency measurements must be made by the BIST and stored in the calculation circuit. The final result from any such test is converted to decibels by the Logarithmic Translation Unit and made available to the system. The main feature of the calculation circuit is the divider. The divider performs several different functions depending on the test. In a IM3 test the divider is used to divide a current magnitude measurement by a previous measurement; likewise, for the SNR measurement it is used to divide the measured signal magnitude by the summation of the noise in the system[16]. The divider and accumulators are also used to find the average noise in the system which is used to calculate the SNR. While this circuit functions correctly and was able to solve the issue of on-chip calculations there are a number of issues which could be improved.

First the area of the calculation circuit was large, particularly the divider took up a large amount of chip area. Second the calculation circuit could not run at the same speed as the BIST circuitry. Our goal for our BIST implementation was to achieve a 1GHz operation frequency. Unfortunately the calculation circuit could not achieve this speed which necessitated two clock domains one for the BIST which could operate at upto 1GHz and one for the calculation circuit which could operate at upto 500 MHz. This made the interface circuitry between the BIST and the calculation circuit more complex and error prone. A third

---

[3]A spur search consists of a measurement from a starting frequency to an ending frequency which returns the frequency and magnitude of the most powerful frequency measured in the given range
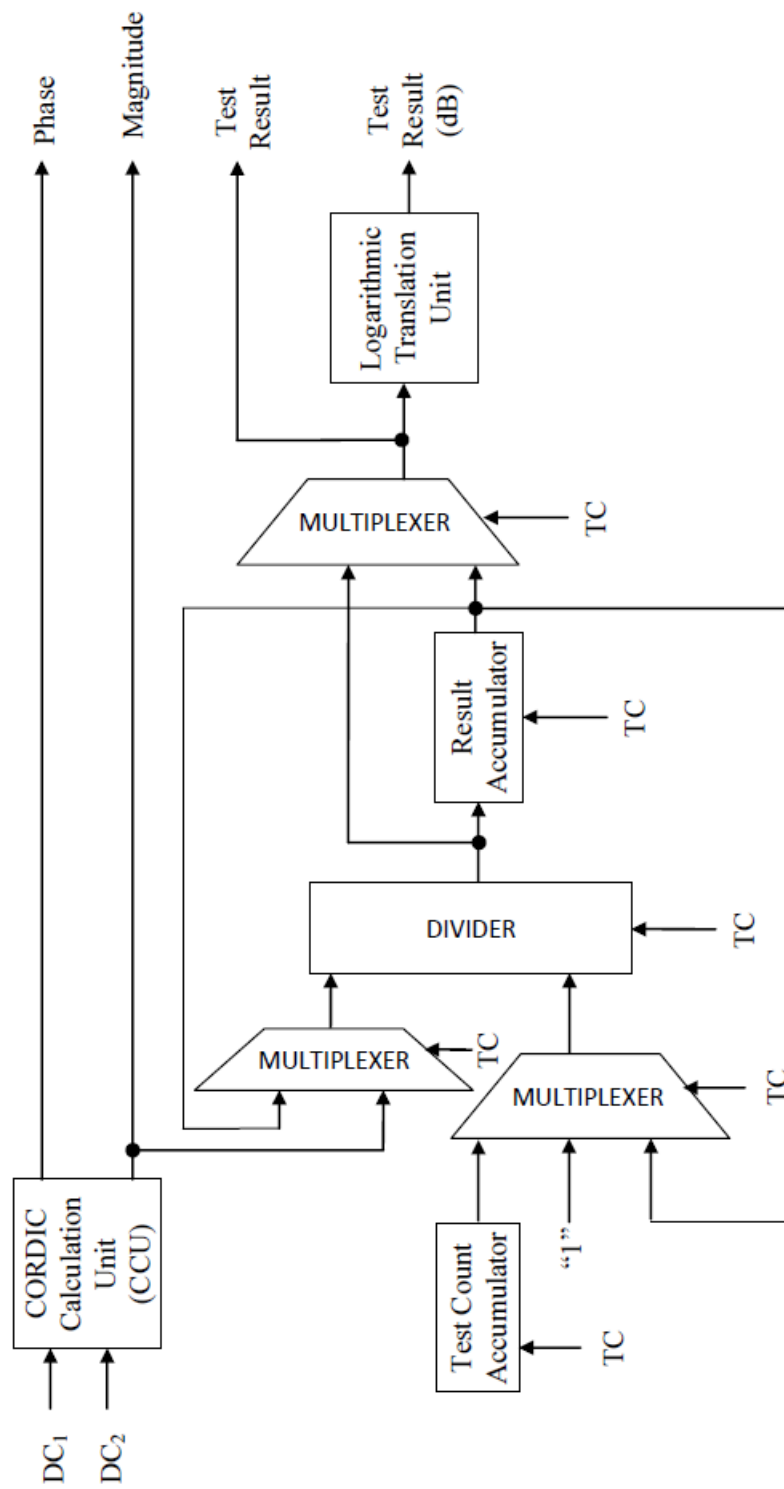
Figure 2.6: Calculation Circuit presented in [16]

issue which occurred was the potential for divide by zero errors. Specifically when measuring the noise in the system, divide by zero errors could cause errors in the measurement if the magnitude measured by the BIST was small.

To overcome these problems a new calculation circuit was developed. Drawing upon the basic operation of the existing circuit the new circuit (Figure 2.7) removes the divider in favor of performing all operations in the logarithmic domain. Like the previous calculation circuit it uses a slightly modified calculation CORDIC based on the design by [16]. Unlike the previous circuit, the Logarithmic Translation Unit has been moved to the front of the circuit so that all inputs are converted their log value. This allows for the removal of the divider circuitry as the division required is performed by the subtraction of the two log values. Consequently, there is no longer an opportunity to perform division by zero since no division operation is occurring. The new circuit is also able to operate at the same clock frequency as the BIST, eliminating the need for two clock domains. Finally due to the removal of the divider and other changes in the BIST, the calculation circuit was able to be shrunk to a much smaller size (approximately a 33% reduction in area and power).

2.4.3   Interfacing with the BIST

Finally given an understanding of the calculation circuit, it is important to be familiar with how our BIST approach is controlled and observed (after all Section 1.1 clearly shows that controllability and observability directly influence the testability of a circuit). Excluding some run flags, the majority of the BIST is controlled via a SPI interface. When writing to the SPI interface there is a lower and upper 64-bit word that should be written with the data required for the test being run. Of the total 128 bits written to the SPI, only 88 of them are actually used by the BIST. Table 2.7 shows an overview of the SPI word. In addition the test control word is broken down in Table 2.8.

To read data out of the BIST the same SPI is used. To read data, a write must first occur with the read flag set and must include two address bits. The address bits are decoded by

Figure 2.7: New Calculation Circuit

Bits	Name	Description
0-14	Frequency Word 1	First frequency of interest[a]
15-29	Frequency Word 2	Second frequency of interest
30-44	Frequency Word 3	Third frequency of interest
45-59	Frequency Word 4	Fourth frequency of interest
60-69	Samples	Number of samples to take[b]
70-85	Test Control Word	Determines the test to run and how to run it
86	Run Force	Makes the BIST run the test after it is loaded
87	Disable DDS Disable	Forces the DDS to reset at the start of a test

[a]The frequency words are used in different ways depending on the test being run
[b]Used for SNR and Spur Search to indicate the number of measurements to take

Table 2.7: SPI Write Command

Bits	Values	Description
0	Loopback Path	Allows bypassing the DAC-ADC pair to test the BIST only
1	Preset	Allows selection of preset tests*
2	Half-IMP	Causes the BIST to wait only half of an IMP length shortening the test time but sacrificing some accuracy
3	Noise Floor	Used to select the summation of the noise instead of the SNR result during and SNR test
4	Bypass Path	Allows bypassing the DUT to test the DAC-ADC path*
6:5	Test Mode	Select the test to be run
10:7	Attenuation	Attenuates the DAC output*
12:11	Read	An initial value to be loaded into the register when reading
13	Disable DDS	Disables the DDS producing no output
14	Disable ORA	Disables the ORA, putting it in reset mode*
15	Run Enable	Enables an external run signal*
		*Unused during fault simulation

Table 2.8: Test Control Word

Table 2.9: Read Address Values

Address	Values
00	DC_1
01	DC_2
10	Magnitude and Phase
11	Spur FW, Log Result, Noise Floor Value

the test controller and correspond to four different 64-bit words which can be read out of the BIST each containing different calculation data related to the test. The values retrievable are shown in Table 2.9. In the context of fault simulation it is less important to focus on the values read and instead focus on how many values can be read in relation to the observability of the system. In the Chapter 3 and Chapter 4 this will be discussed in more detail as it relates to the tests run and potential improvements to the fault coverage by increasing controllability and observability.

In addition to the SPI IO, there are a few other important outputs used in simulation. First there is the DDS output which is the generated tone for the test being executed, there is also a 10-bit test result output which is updated to the final log value calculated when the test has completed. Finally, there is a done flag used to denote that the BIST has finished performing the test requested and that the results have been calculated.

2.4.4   Conclusion

While these descriptions of the BIST are not a comprehensive operating manual, they are provided to give a background of the circuit so that a basic understanding can be developed by the reader. The focus of the next chapters will shift to the actual fault simulations and away from the underlying architecture except where it relates to potential improvements in fault coverage and the coverage that is achieved. Overall the goal of the techniques and methods discussed next are to show an effective method to testing mixed-signal built-in self-test systems using our BIST approach both as a benchmark and for context.

Chapter 3

Fault Simulations

3.0.5 Converting to ASL

In many cases behavioral models are written in a high-level hardware description language such as VESIC Hardware Description Language (VHDL) or Verilog. These languages allow a behavioral model to be developed of a circuit at a much higher level than ASL's gate-level description. This means that for large, complex circuits (such as our BIST approach) design in VHDL or Verilog is preferred. To aid in the simulation of larger circuits a tool was developed to convert a Verilog net-list to an ASL net-list. This allows a user to write a high-level behavioral description of the circuit, synthesis it down to a Verilog net-list using one of many different CAD tools, then convert it to ASL for fault simulation using the VerilogParser tool.

As a simple example the ISCAS '85 C17 benchmark circuit (Figure 3.1) was used to demonstrate the conversion process and the differences between a Verilog net-list and an ASL net-list. In Figure 3.1 A the behavioral model of the C17 circuit has been synthesized into a post-layout net-list in Verilog. In B the Verilog model has been converted to ASL. The most significant challenge converting from Verilog to ASL is the difference in the treatment of inputs and outputs of gates and circuits. In 3.1 A, line 7 the instantiation of the AO21 gate is seen. The gate's inputs and outputs are not designated separately. In addition the net names are attached to their respective gate IO names. In contrast, in 3.1 B, line 2[1] the same gate is instantiated in ASL. ASL uses a syntax that declares the inputs and outputs to a gate by position and not by name. For the translation to be successful, the inputs and

---

[1] The AO21 gate is a custom sub-circuit previously declared

```
1    module c17(gat1, gat2, gat3, gat6, gat7, gat22, gat23);
2      input gat1, gat2, gat3, gat6, gat7;
3      output gat22, gat23;
4      wire gat1, gat2, gat3, gat6, gat7;
5      wire gat22, gat23;
6      wire n_0, n_1;
7      AO21_B g58(.A1 (gat1), .A2 (gat3), .B (n_1), .Z (gat22));
8      AO21_B g59(.A1 (n_0), .A2 (gat7), .B (n_1), .Z (gat23));
9      AND2_B g60(.A (n_0), .B (gat2), .Z (n_1));
10     NAND2_A g61(.A (gat3), .B (gat6), .Z (n_0));
11   endmodule
```

(A) Verilog Net-list

```
1  CKT: c17 IN: gat1 gat2 gat3 gat6 gat7 OUT: gat22 gat23 ;
2  AO21: g58 IN: gat1 gat3 n-1 OUT: gat22 ;
3  AO21: g59 IN: n-0 gat7 n-1 OUT: gat23 ;
4  AND: g60 IN: n-0 gat2 OUT: n-1 ;
5  NAND: g61 IN: gat3 gat6 OUT: n-0
```

(B) ASL Net-list

Figure 3.1: C17 Benchmark Circuit Net-list

outputs to the gates must be ordered correctly. Various techniques including lookup tables must be used to build the ASL correctly.

The VerilogParser tool performs the translation to ASL. It is written in Microsoft .NET C# 3.5. The language was chosen due to the author's familiarity with the language as well as the extensive standard library included in .NET which simplified the program considerably[14]. As a quick reference Figure 3.2 demonstrates how to use the tool on a Verilog net-list. The tool works by scanning the Verilog file for module definitions and parses the modules into an intermediate representation of the circuit. It then prompts the user to choose which module should be used as the top-level circuit before outputting the resulting ASL. Some improvements can be made to the converter such as automatic top-level module detection as well as the ability to convert VHDL net-lists; however, these features were not implemented due to time constraints. It is important to note that while the ASL generated

38

Figure 3.2: Using the Verilog to ASL tool to convert a circuit to ASL

will always be syntactically correct, the tool does not check for validity of the circuit. It is assumed any necessary sub-circuits that are used in the net-list have already been created and verified in ASL. For a more detailed analysis of the Verilog to ASL parser please refer to the Appendix A.

3.0.6 Generating Test Vectors using Vecgen

Vecgen is a program written to generate AUSIM vector files. It uses a straight forward command language to build a vector file of any length. It is written in Microsoft's .NET C#[14] language. Vecgen addresses the issue of large circuits by using a concept called frames.

The first line of a Vecgen file must be the GENERATE command which tells the generator how many frames(vectors) to generate and the number of primary inputs of the circuit. If all the user provides is the GENERATE command then Vecgen will create a vector file with the specified number of vectors, filled with all '0' characters as wide as the number of primary inputs in the circuit. This is the idea behind Vecgen, the vector each time is the same as the vector before it unless changed by the user in a frame. There are a number of commands which are available to manipulate the output using Vecgen (the full list is available in Appendix B). An example generation command file, which would create the vector file shown in Table 2.4, is given in Table 3.0.6 showing the Vecgen format: In the case of the half-adder example, the generator is much more verbose and would not be preferred; however, for this example one can see how it would help in more complex generation. In

39

GENERATE 4 2

FRAME 1
BIT 0 1

FRAME 2
BIT 0 0
BIT 1 1

FRAME 3
BIT 0 1

Table 3.1: Command to generate the half-adder vector sequence

our example FRAME 0 is not modified since the first vector generated is always all logic 0's. FRAME 1 changes bit 0 to a logic 1 so that the resulting vector is now *01*. FRAME 2 changes bit 0 back to a logic 0 and changes bit 1 to a logic 1, resulting in *10*. Finally FRAME 3 updates bit 0 back to a logic 1 to obtain the vector *11*. Only at the times the output vector is changing does a FRAME need to be declared: if we were to generate ten frames instead of the four specified in the example, then the remaining six vectors would be automatically filled in and be the same *11* vector set by FRAME 3.

This is a very simple example, there are many more commands as shown in Appendix B that allow for much more powerful generation. Some commands such as RANGE affect multiple bits at once, others such as SERIALIZE or CLOCK work over multiple frames. One interesting command is the DECLARE command. The DECLARE command creates a reusable group of commands which can be called from any frame. This is especially useful if a certain sequence is required repeatedly during a test. An example sequence and its output are shown in Table 3.2. The sequence creates a clock on its MSB, then calls a function which counts up then counts back down. It then disables the clock and calls the counter function again. The generation in Table 3.2 is much more powerful than the previous example in Table 3.0.6 and demonstrates some of the power that the Vecgen program provides. All fault simulation tests for the BIST are designed in the Vecgen markup language for simplicity.

Table 3.2: Vecgen Example

Commands	1-15	16-24
GENERATE 24 3	100	001
	000	000
DECLARE counter	101	000
FRAME 0	001	001
COUNT 0 2 U	110	001
FRAME 8	010	010
COUNT 0 2 D	111	010
ENDDECLARE	011	011
	100	011
FRAME 0	000	
CLOCK 2	111	
CALL counter	011	
FRAME 16	110	
BIT 2 0	010	
CALL counter	101	

Chapter 4

Simulation Results

Chapter 5

Conclusions and Summary

Bibliography

[1] Charles Stroud, *A Designer's Guide to Built-In Self-Test*, Vishwani D. Agrawal, Ed. Dordrecht: Kluwer Academic Publishers, 2002.

[2] ITRS 2009 (I am not sure how to cite this I need to ask you about it)

[3] Yervant Zorian, "Testing the monster chip," *Spectrum, IEEE*, vol. 37, no. 7, pp. 54-60, July 1999.

[4] Louis Ungar and Tony Ambler, "Economics of Built-In Self-Test," *Design & Test of Computers, IEEE*, vol. 18, no. 5, pp. 70-79, Sep-Oct 2001, `http://ieeexplore.ieee.org/stamp/stamp.jsp?tp=&arnumber=953274&isnumber=20606`.

[5] Laung-Terng Wang, Nur Touba, and Charles Stroud, Eds., *System On Chip Test Architectures*. Burlington, MA: Elsevier, 2008.

[6] Linda Milor and V Visvanathan, "Detection of Catastrophic Faults in Analog Integrated Circuits," *IEEE Transactions on Computered-Aided Design of Integrated Circuits and Systems*, vol. 8, no. 2, pp. 114-130, Feburary 1989.

[7] Charles Stroud, Piyumani Karunaratna, and Eugene Bardley, "Digital Components for Built-In Self-Test of Analog Circuits," in *10th ASIC Conference and Exhibit*, Portland, 1997, pp. 47,51.

[8] Charles E. Stroud, "AUSIM: Auburn University SIMulator - version 2.0", Dept. of Electrical & Computer Engineering, Auburn University, July 7, 2003

[9] Charles E. Stroud, "ASL: Auburn Simulation Language", Dept. of Electrical & Computer Engineering, Auburn University, July 7, 2003.

[10] "IEEE Standard Hardware Description Language Based on the Verilog(R) Hardware Description Language," IEEE Std 1364-1995 , vol., no., pp.i, 1996 doi: 10.1109/IEEESTD.1996.81542 URL: `http://ieeexplore.ieee.org/stamp/stamp.jsp?tp=&arnumber=803556&isnumber=12005`

[11] Jie Qin; Stroud, C.; Dai, F.; , "Test time of multiplier/accumulator based output response analyzer in built-in analog functional testing," System Theory, 2009. SSST 2009. 41st Southeastern Symposium on , vol., no., pp.363-367, 15-17 March 2009 doi: 10.1109/SSST.2009.4806795 URL: `http://ieeexplore.ieee.org/stamp/stamp.jsp?tp=&arnumber=4806795&isnumber=4806773`

[12] Jie Qin; Stroud, C.; Dai, F.; , "Noise Figure Measurement Using Mixed-Signal BIST," Circuits and Systems, 2007. ISCAS 2007. IEEE International Symposium on , vol., no., pp.2180-2183, 27-30 May 2007 doi: 10.1109/IS-CAS.2007.378606 URL: `http://ieeexplore.ieee.org/stamp/stamp.jsp?tp=&arnumber=4253104&isnumber=4252535`

[13] F. Dai, C. Stroud, and D. Yang, Automatic Linearity and Frequency Response Tests with Built-in Pattern Generator and Analyzer, IEEE Trans. on VLSI Systems., vol. 14, no. 6, pp. 561-572, 2006.

[14] Microsoft. The C# Language. Visual C# Developer Center. [Online] `http://msdn.microsoft.com/en-us/vcsharp/aa336809.aspx`.

[15] Jie Qin, Selective Spectrum Analysis (SSA) and Numerically Controlled Oscillator (NCO) in Mixed-Signal Built-In Self-Test, Doctoral Dissertation, Auburn University, 2010.

[16] Joey's Thesis

[17] Milor, L.; Visvanathan, V.; , "Detection of catastrophic faults in analog integrated circuits," Computer-Aided Design of Integrated Circuits and Systems, IEEE Transactions on , vol.8, no.2, pp.114-130, Feb 1989 doi: 10.1109/43.21830 URL: `http://ieeexplore.ieee.org/stamp/stamp.jsp?tp=&arnumber=21830&isnumber=882`

[18] Arabi, K., and B. Kaminska, "Oscillation-Test Strategy for Analog and Mixed-Signal Integrated Circuits," Proc. IEEE VLSI Test Symp., 1996, pp. 476-482.

[19] Yarmolik, V. *Fault diagnosis of digital circuits. John Wiley Sons, 1990. Print.*

[20] *Vinnakota, Bapiraju.* Analog and mixed-signal test. Prentice Hall, 1998. Print.

Appendix A

Verilog To ASL Parser

This appendix reviews the Verilog to ASL parser tool in more detail. The parser is 837 total lines of code, as such only select portions will be reviewed in this appendix.

TBD, expect 2-3 pages

Appendix B

Vecgen Commands

This appendix provides a list of all commands usable by the Vecgen program to create test vector files for AUSIM.

TBD, expect 3-4 pages