

Identity:


- o In Cisco ISE Identity is the fact of being whom or what a user or device is.
- o Many factors make up identity, including employee's username & password.
- o In Cisco ISE the Identity is used to access corporate network resources.
- o Identity can be a username with password or Endpoints with details.

Status	Name	Description	First Name
☒ Enabled	admin1		
☒ Enabled	support1		
☒ Enabled	user1		
☒ Enabled	user2		

Identity Stores:


- o Identity store is a database that authenticate a user's or an endpoint's credentials.
- o Identity Store is a store or database that is used to authenticate users or endpoints.
- o Identity store could be an internal database that resides on the AAA server.
- o Identity store could be an additional external database to connect.
- o Identity Stores can also be used for attributes required for authorizing policies.
- o Each individual identity store is also referred to as an identity source.
- o Both the Cisco ISE & Cisco Secure ACS are capable of using identity sources.
- o Both support internal identity databases as well as external identity databases.
- o External Identity stores are the external databases, which are used for authentication.
- o External identity sources include AD, LDAP, OTP servers, smart cards, and CAs.
- o Cisco ISE has internal user database for internal username and password accounts.
- o External identity store supported Cisco ISE is integration Microsoft Active Directory.

Status	Name	First Name
☒ Enabled	admin1	
☒ Enabled	supper1	
☒ Enabled	user1	

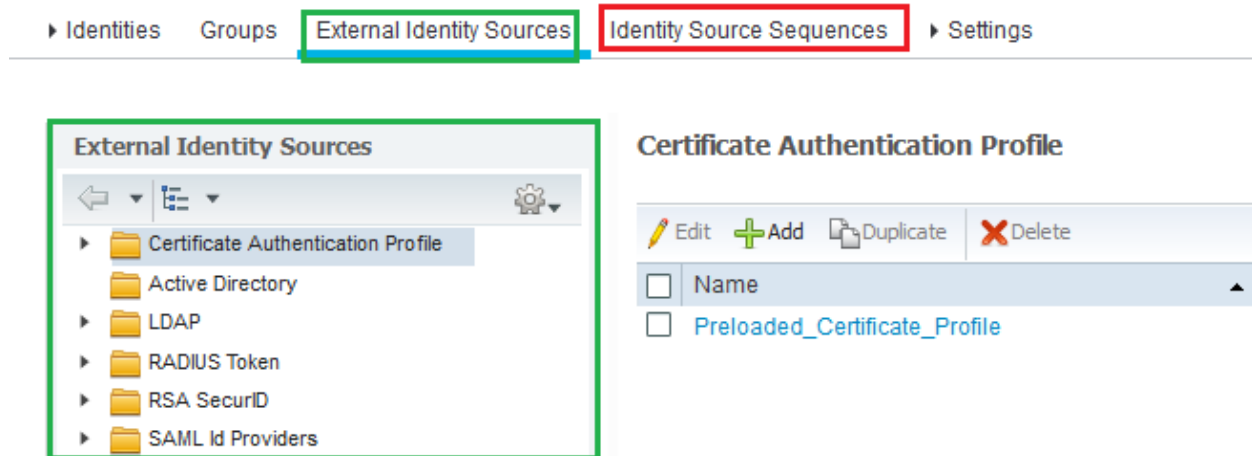

Local:

- o Cisco ISE has internal user database used for internal username & password accounts.
- o These user accounts stored in the internal user database are referred to as internal users.
- o Internal user database can be used as an internal identity store for local authentication.
- o Internal user database can be used for internal identity store for local authorization policies.
- o Users in the internal user database are called internal users.

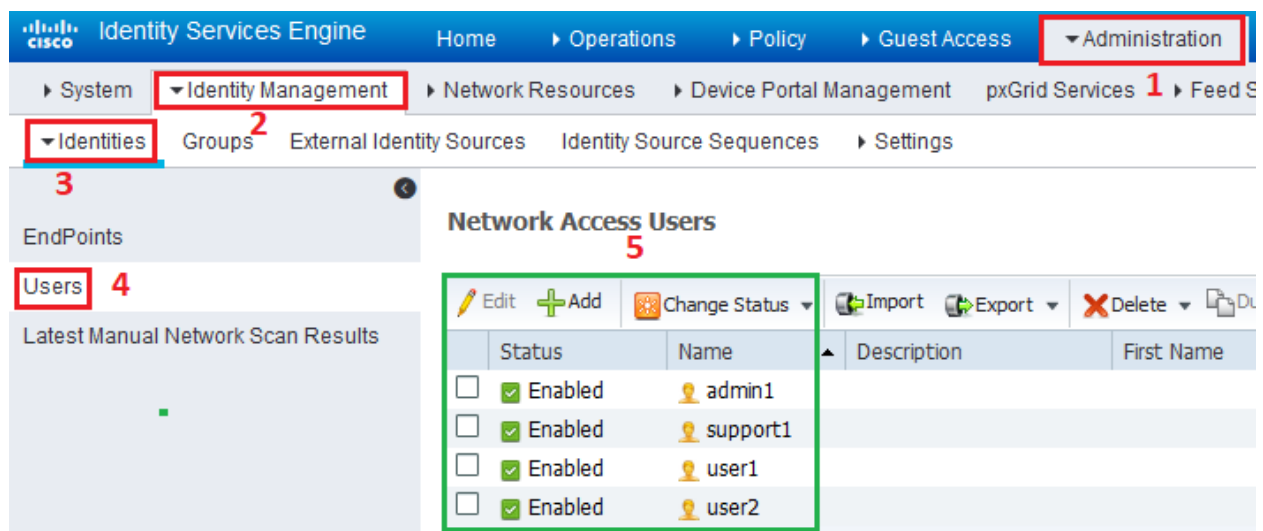


Node:

A node is a server, either physical or virtual. A node is an individual instance that runs the Cisco ISE software. Cisco ISE is available as an appliance and also as a software that can be run on VMware. Each instance, appliance or VMware that runs the Cisco ISE software is called a node.



Persona:

A Persona is the role the server is filling. The persona or personas of a node determine the services provided by a node. A Cisco ISE node can assume any of the following personas: Administration, Policy Service, Monitoring.

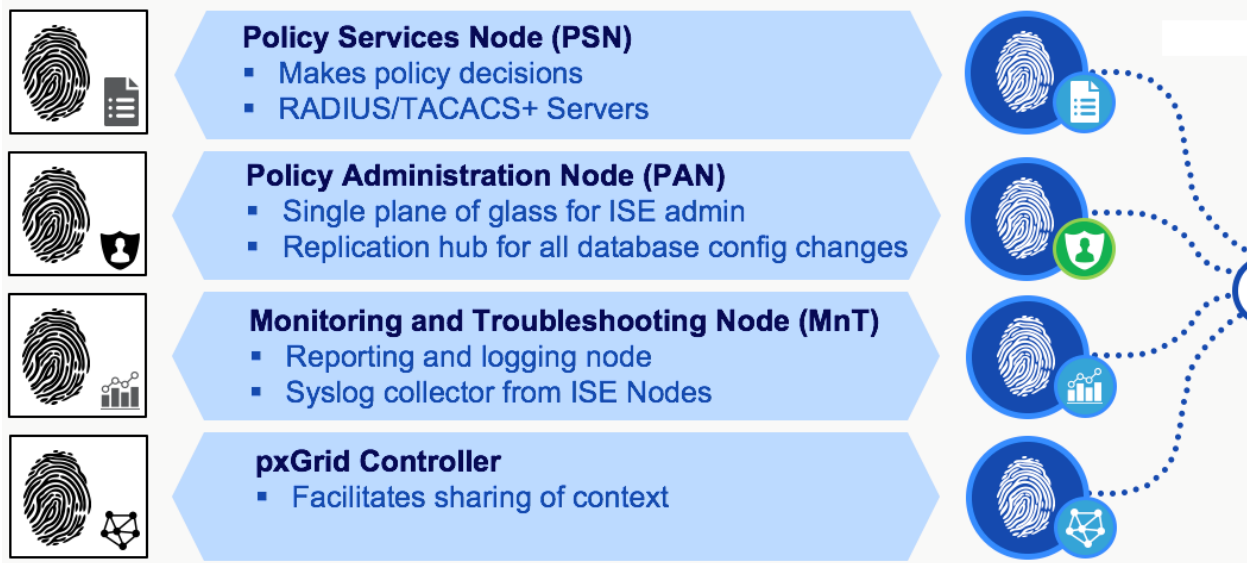

Service:

A Service is a feature within a persona. Service is a specific feature that a persona provides such as network access, profiler, posture, security group access, monitoring and troubleshooting, and so on.