


DACL Lab Topology:

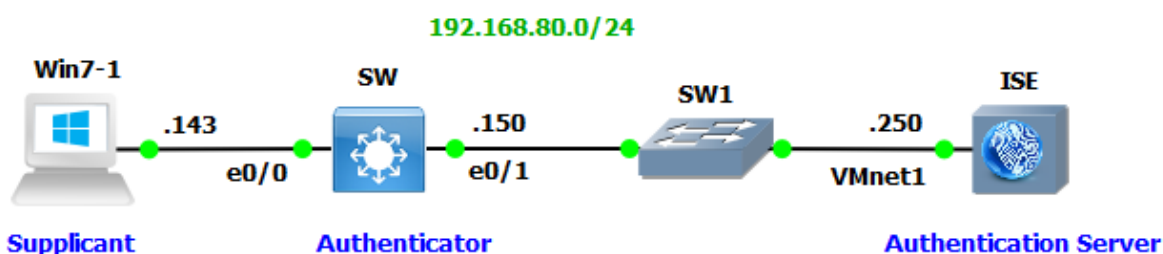

Configuring Switch:

SW(config)#interface vlan 1
SW(config-if)#ip address 192.168.80.150 255.255.255.0
SW(config-if)#no shutdown
SW(config)#aaa new-model
SW(config)#aaa authentication dot1x default group radius
SW(config)#aaa authorization network default group radius
SW(config)#radius-server vsa send authentication
SW(config)# radius-server vsa send accounting
SW(config)#radius server ISE
SW(config-radius-server)#address ipv4 192.168.80.250 auth-port 1812 acct-port 1813
SW(config-radius-server)#key test123
SW(config)#interface ethernet 0/0
SW(config-if)#switchport host
SW(config-if)#switchport access vlan 1
SW(config-if)#authentication port-control auto
SW(config-if)#mab

Configuring Downloadable ACL:

Click Policy, and click Policy Elements. Click Results. Expand Authorization, and click Downloadable ACLs. Click the Add button in order to create a new downloadable ACL. Go to

Policy -> Policy Elements -> Results -> Authorization -> Downloadable ACLs -> Add

In the Name field, enter a name for the DACL.

Identity Services Engine Home Operations Policy Guest Access

Authentication Authorization Profiling Posture Client Provisioning Policy Elements

Dictionaries Conditions Results

Authentication

Authorization

Authorization Profiles

Downloadable ACLs

Profiling

Posture

Client Provisioning

Downloadable ACL List > New Downloadable ACL

Downloadable ACL

* Name: MAB-DACL

Description: Downloadable ACL for MAB PC

* DACL Content

1234567	deny icmp any host 192.168.80.1
8910111	permit udp any any
2131415	permit ip any any
1617181	
9202122	
2324252	
6272829	
3031323	
3343536	
3738394	

Check DACL Syntax

Submit Cancel

Now add this DACL to a new or existing Authorization Profile. **Policy -> Policy Elements -> Results -> Authorization -> Authorization Profiles -> New**
 Configure DACL under new profile:

Now let us assign this profile to MAB Authorization Rule. Go to **Policy -> Authorization**. Edit existing **Basic_Authenticated_Access**, Click **Duplicate Above**.

Type Rule Name: MAB-Test, Conditions: Any and Choose **Compound Conditions> Wired_MAB Permissions**: Choose Standard Group and select authorization profile MAB-Profile early created.

☒	Profiled Cisco IP Phones	if	Cisco-IP-Phone
☒	Profiled Non Cisco IP Phones	if	Non_Cisco_Profiled_Phones
☒	Compliant_Devices_Access	if	(Network_Access_Authentication_Passed AND Compliant_Devices_Access)
☒	Employee_EAP-TLS	if	(Wireless_802.1X AND BYOD_is_Registered AND EAP-TLS)
☒	Employee_Onboarding	if	(Wireless_802.1X AND EAP-MSCHAPv2)
☒	Wi-Fi_Guest_Access	if	(GuestType_Daily (default) OR GuestType_Weekly (default) AND (Guest_Flow AND Wireless_MAB))
☒	Wi-Fi_Redirect_to_Guest_Login	if	Wireless_MAB
☒	MAB-Test	if	Any
☒	Basic_Authenticated_Access	if	Network_Access_Authentication_Passed
☒	Default	if no matches, then	DenyAccess

Compound Conditions

- Compliant_Devices
- Guest_Flow
- EAP-MSCHAPv2
- EAP-TLS
- BYOD_is_Registered
- MAC_in_SAN
- Wireless_802.1X
- Switch_Web_Authentication
- Wired_MAB**
- Wired_802.1X
- Wireless_MAB
- WLC_Web_Authentication

Condition Name

Wired_MAB

Standard

- Blackhole_Wireless_Access
- CWA-Profile
- Cisco_IP_Phones
- Cisco_WebAuth
- DenyAccess
- MAB-Profile**
- NSP_Onboard
- Non_Cisco_IP_Phones
- PermitAccess

MAB-Profile

MAB-Profile

Identity Services Engine

Home Operations Policy Guest Access Administration Work Centers

Authentication Authorization Profiling Posture Client Provisioning Policy Elements

Authorization Policy

Define the Authorization Policy by configuring rules based on identity groups and/or other conditions. Drag and drop rules to change the order.
For Policy Export go to [Administration > System > Backup & Restore > Policy Export Page](#)

First Matched Rule Applies

Exceptions (0)

Standard

Status	Rule Name	Conditions (identity groups and other conditions)	Permissions
✓	Wireless Black List Default	if Blacklist AND Wireless_Access	then Blackhole_Wireless_Access
✓	Profiled Cisco IP Phones	if Cisco-IP-Phone	then Cisco_IP_Phones
✓	Profiled Non Cisco IP Phones	if Non_Cisco_Profiled_Phones	then Non_Cisco_IP_Phones
⊙	Compliant_Devices_Access	if (Network_Access_Authentication_Passed AND Compliant_Devices)	then PermitAccess
⊙	Employee_EAP-TLS	if (Wireless_802.1X AND BYOD_Is_Registered AND EAP-TLS AND MAC_in_SAN)	then PermitAccess AND BYOD
⊙	Employee_Onboarding	if (Wireless_802.1X AND EAP-MSCHAPv2)	then NSP_Onboard AND BYOD
⊙	Wi-Fi_Guest_Access	if (GuestType_Daily (default) OR GuestType_Weekly (default) OR GuestType_Contractor (default)) AND (Guest_Flow AND Wireless_MAB)	then PermitAccess AND Guests
⊙	Wi-Fi_Redirect_to_Guest_Login	if Wireless_MAB	then Cisco_WebAuth
✓	MAB-Test	if Wired_MAB	then MAB-Profile
✓	Basic Authenticated Access	if Network_Access_Authentication_Passed	then PermitAccess

SW# debug radius authentication

SW# show authentication sessions interface ethernet 0/0

SW# show ip interface ethernet0/0

SW# show ip access-lists

Extended IP access list xACSACLx-IP-MAB-DACL-5d021870 (per-user)

1 permit udp any any
2 permit ip any any