


Dynamic VLAN:

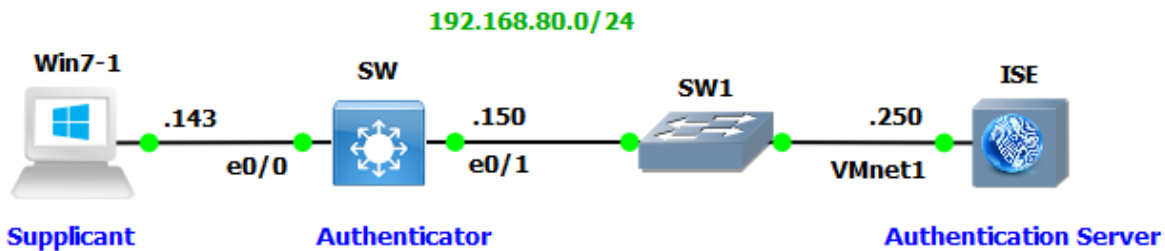

Create new or existing authorization profile to assign VLAN. Navigate under "**Policy > Policy Elements > Results > Authorization > Authorization profiles**" and click "Add" button to create new profile or click on already existing profile. Configure VLAN under profile:

The screenshot shows the Cisco Identity Services Engine (ISE) configuration interface. The navigation pane on the left includes Authentication, Authorization, Profiling, Posture, and Client Provisioning. The Authorization section is expanded, showing Authorization Profiles. The main pane displays the configuration for the 'MAB-Profile' authorization profile. The configuration includes fields for Name, Description, Access Type, Network Device Profile, Service Template, and Track Movement. The 'Common Tasks' section is expanded, showing checkboxes for DACL Name, ACL (Filter-ID), and VLAN. The VLAN checkbox is checked, and the Tag ID is set to 1. The ID/Name field is set to 100.

Now assign this profile to MAB Authorization Rule. Go to **Policy -> Authorization**.

Already done above in DACL Lab.

SW# **show authentication sessions interface ethernet 0/0**

SW# **show ip interface ethernet0/0**

Home

Operations

Policy

Guest Access

Administration

Work Centers

RADIUS LiveLog

TACACS LiveLog

Reports

Troubleshoot

Adaptive Network Control

Misconfigured Supplicants0

Misconfigured Network Devices0

RADIUS Drops0

Client Stopped Responding0

Show Live Sessions

Add or Remove Columns

Refresh

Reset Repeat Counts

Refresh

Never

Show

Latest

Time	Status	Details	Repeat Count	Identity	Endpoint ID	Endpoint Profile	Authentication Policy	Authorization Policy	Authorization
2019-06-13 09:40:22.495				9 00:0C:29:55:68:E 00:0C:29:55:68:E0	VMWare-Device	Default >> MAB >> D...	Default >> MAB-Test	MAB-Profile	
2019-06-13 09:40:12.474				#ACSAcl#-IP-M/					
2019-06-13 09:33:13.998				#ACSAcl#-IP-M/					
2019-06-13 09:31:34.153				#ACSAcl#-IP-M/					
2019-06-13 08:53:25.336				00:0C:29:55:68:E 00:0C:29:55:68:E0	VMWare-Device	Default >> MAB >> D...	Default >> MAB-Test	MAB-Profile	

SW# **show vlan br**

VLAN	Name	Status	Ports
1	default	active	Et0/1, Et0/2, Et0/3, Et1/0 Et1/1, Et1/2, Et1/3
100	admin	active	Et0/0

SW# **show authentication sessions interface ethernet 0/0 details**

```

Interface: Ethernet0/0
MAC Address: 000c.2955.68e0
IPv6 Address: Unknown
IPv4 Address: Unknown
User-Name: 00-0C-29-55-68-E0
Status: Authorized
Domain: DATA
Oper host mode: multi-domain
Oper control dir: both
Session timeout: N/A
Restart timeout: N/A
Periodic Acct timeout: 300s (local), Remaining: 93s
Session Uptime: 510s
Common Session ID: C0A8509600000000E0004CB2A
Acct Session ID: 0x00000002
Handle: 0xA3000002
Current Policy: POLICY_Et0/0

Local Policies:
Service Template: DEFAULT_LINKSEC_POLICY_SHOULD_SECURE (priority 150)
Security Policy: Should Secure
Security Status: Link Unsecure

```

```

Server Policies:
Vlan Group: vlan: 100

```