


Full NAT Lab:

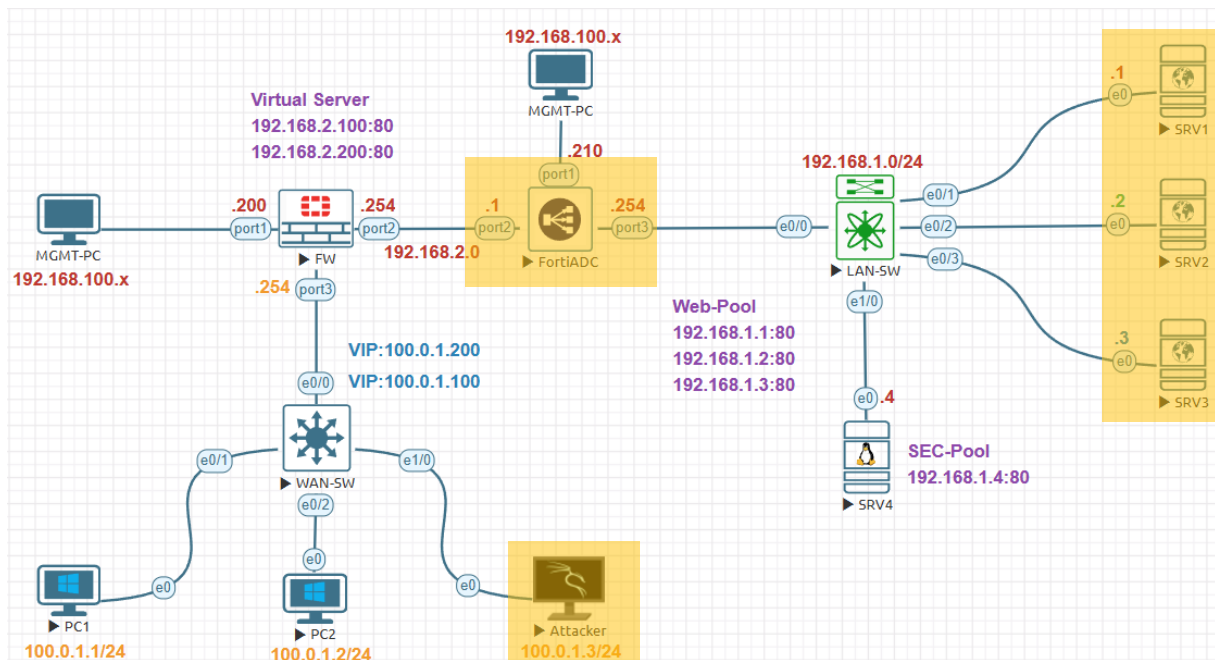

Management Subnet	192.168.100.0/24
FortiGate Management IP	192.168.100.200
FortiADC Management IP	192.168.100.210
Internal Servers Subnet	192.168.1.0/24
FortiADC External Subnet	192.168.2.0/24
FortiGate Firewall External	100.0.1.0/24
FortiADC Internal IP Address	192.168.1.254
FortiADC External IP Address	192.168.2.1
FortiGate Firewall Internal IP	192.168.2.254
FortiGate Firewall External IP	100.0.1.254
SRV1 IP Address	192.168.1.1
SRV2 IP Address	192.168.1.2
SRV3 IP Address	192.168.1.3
SRV3 IP Address	192.168.1.4
Virtual Sever-1	192.168.2.100
Virtual Sever-2	192.168.2.200
FortiGate VIP-1	100.0.1.100
FortiGate VIP-2	100.0.1.200
External PC1 IP Address	100.0.1.1
External PC2 IP Address	100.0.1.2
External PC3 IP Address	100.0.1.3

Disable Health Checks:

Click **Server Load Balance > Real Server Pool**. Click the edit icon or double click to edit the WEB-Pool real server pool.

Real Server Pool

Real Server Server SSL

Delete + Create New + Add Filter

Name	Address Type	Health Check
WEB-Pool	IPv4	Enable
SEC-Pool	IPv4	Disable

Showing 1 to 2 of 2 entries 0 rows selected Show 25 entries

Virtual Server
Application Resources
Application Optimization
Real Server Pool

Disable the **Health Check** option. Click **Save**.

Real Server Pool

Name: WEB-Pool

Address Type: IPv4 IPv6

Type: Static Dynamic

Health Check: ☐

Real Server SSL Profile: NONE

Member

Delete + Create New + Add Filter

ID	Name	Address
1	SRV1	192.168.1.1

Virtual Server
Application Resources
Application Optimization
Real Server Pool

Now, only user-generated traffic arrives at the servers, and not health check traffic.

Create Source IP Pool:

The source pool will contain an IP address range to be used to translate the source IP of the user traffic.

Click **Server Load Balance > Virtual Server > NAT Source Pool**. Click **Create New** to create a new source pool.

The screenshot shows the FortiGate web interface. On the left is a sidebar menu with icons and labels: Dashboard, Security Fabric, FortiView, System, Shared Resources, Network, and Server Load Balance. The 'Server Load Balance' item is highlighted with a red box. Below it, the 'Virtual Server' sub-item is also highlighted with a red box. The main content area has tabs: Virtual Server, Content Rewriting, Content Routing, and NAT Source Pool. The 'NAT Source Pool' tab is selected and highlighted with a red box. Below the tabs are buttons: Delete, Create New (highlighted with a red box), and Add Filter. Below these buttons is a table header with columns: Name, Interface, and Address Type. Below the header, it says 'Showing 0 to 0 of 0 entries 0 rows selected Show 25 entries'.

Then configure the following settings to create a new source pool Click **Save**

The screenshot shows the configuration page for a NAT Source Pool. The left sidebar is the same as the previous screenshot, with 'Server Load Balance' and 'Virtual Server' highlighted. The main content area has a title 'NAT Source Pool'. Below the title are several fields: Name (SourcePool), Interface (port3), Address Type (IPv4 selected), Address Range (192.168.1.110), and To (192.168.1.120). Below these fields is a 'Node Member' section with buttons: Delete, Create New, and Add Filter. At the bottom right, there is a green 'Save' button, which is pointed to by a red arrow.

Finally, after click **Save** two time the NAT Source Pool has been created.

Virtual Server		Content Rewriting		Content Routing		NAT Source Pool		Schedule Pool		Clone Pool	
 Delete		 Create New				 Add Filter					
Name		Interface		Address Type		Address Range					
SourcePool		port3		IPv4		192.168.1.110 - 192.168.1.120					

Click **Server Load Balance > Virtual Server > Virtual Server**. Click the **edit** icon or **double click** to edit the virtual server **WEB-Pool**.

Name	Type	Address	Port
WEB-VS	Layer 4	192.168.2.100	80
SEC-VS	Layer 7	192.168.2.200	443

Showing 1 to 2 of 2 entries 0 rows selected Show 25 entries

On the **Basic** tab, scroll down to the Specifics section. Change the **Packet-Forwarding Method** setting to **Full NAT**. In the Available Items list, double-click **SourcePool**. Click **Save**.

Virtual Server

Basic General Security Monitoring

Name: WEB-VS

Type: Layer 7 Layer 4 Layer 2

Status: Enable Disable Maintain

Address Type: IPv4 IPv6

Traffic Group: default

Comments: Specify the comments

Specifics

Schedule Pool: ☐

Content Routing: ☐

Packet Forwarding Method: Full NAT

NAT Source Pool List

Selected Items: SourcePool

Available Items: Create New

Double-click to deselect. Drag to reorder.

Double-click to se

Save


Full NAT Traffic Capture:

Open Console or SSH connection to the FortiADC, Enter the following CLI command to enable the sniffer and capture of HTTP traffic:

diagnose sniffer packet any "port 80" 4

On the Kali Linux-External PC, open a browser, and then connect to the virtual server at

<http://100.0.1.100>

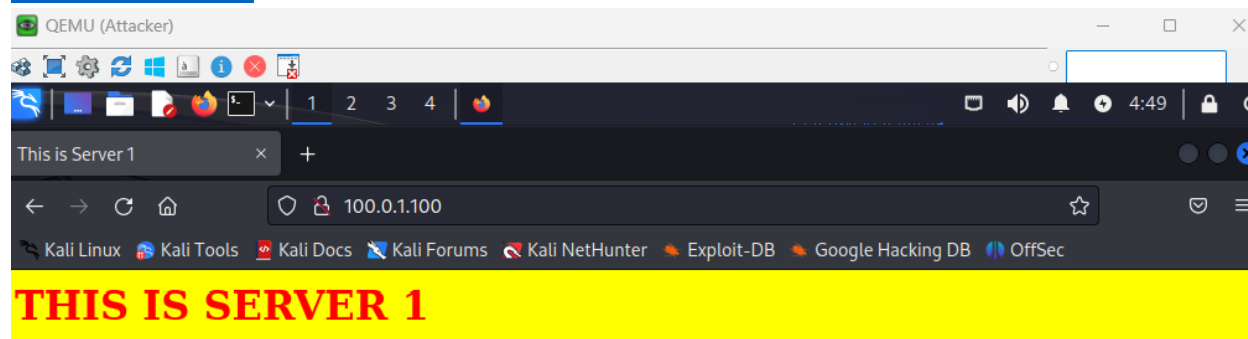

Return to the FortiADC session, and then observe the sniffer output.

```
FortiADC # diagnose sniffer packet any "port 80" 4
interfaces=[any]
filters=[port 80]
0.379506 port3 in 192.168.1.2.80 -> 192.168.1.117.5001: fin 3044669457 ack 3848365967
0.379528 port2 out 192.168.2.100.80 -> 100.0.1.3.52654: fin 3044669457 ack 3574369421
0.380862 port2 in 100.0.1.3.52654 -> 192.168.2.100.80: fin 3574369421 ack 3044669458
0.380877 port3 out 192.168.1.117.5001 -> 192.168.1.2.80: fin 3848365967 ack 3044669458
0.381503 port3 in 192.168.1.2.80 -> 192.168.1.117.5001: ack 3848365968
0.381515 port2 out 192.168.2.100.80 -> 100.0.1.3.52654: ack 3574369422
15.295063 port2 in 100.0.1.3.54488 -> 192.168.2.100.80: syn 1699035632
15.295206 port3 out 192.168.1.118.5001 -> 192.168.1.1.80: syn 581955644
15.296350 port3 in 192.168.1.1.80 -> 192.168.1.118.5001: syn 1919023855 ack 581955645
15.296362 port2 out 192.168.2.100.80 -> 100.0.1.3.54488: syn 1919023855 ack 1699035633
15.297529 port2 in 100.0.1.3.54488 -> 192.168.2.100.80: ack 1919023856
15.297540 port3 out 192.168.1.118.5001 -> 192.168.1.1.80: ack 1919023856
15.297625 port2 in 100.0.1.3.54488 -> 192.168.2.100.80: psh 1699035633 ack 1919023856
15.297631 port3 out 192.168.1.118.5001 -> 192.168.1.1.80: psh 581955645 ack 1919023856
15.298514 port3 in 192.168.1.1.80 -> 192.168.1.118.5001: ack 581956023
15.298522 port2 out 192.168.2.100.80 -> 100.0.1.3.54488: ack 1699036011
15.298920 port3 in 192.168.1.1.80 -> 192.168.1.118.5001: psh 1919023856 ack 581956023
15.298926 port2 out 192.168.2.100.80 -> 100.0.1.3.54488: psh 1919023856 ack 1699036011
15.299895 port2 in 100.0.1.3.54488 -> 192.168.2.100.80: ack 1919024329
15.299904 port3 out 192.168.1.118.5001 -> 192.168.1.1.80: ack 1919024329
15.338272 port2 in 100.0.1.3.54488 -> 192.168.2.100.80: psh 1699036011 ack 1919024329
15.338294 port3 out 192.168.1.118.5001 -> 192.168.1.1.80: psh 581956023 ack 1919024329
15.339569 port3 in 192.168.1.1.80 -> 192.168.1.118.5001: psh 1919024329 ack 581956352
15.339586 port2 out 192.168.2.100.80 -> 100.0.1.3.54488: psh 1919024329 ack 169903634
```

The source IP address of the user traffic was translated from the Kali Linux-External PC (100.0.1.3) to one of the IP addresses in the source pool (192.168.1.118), and the traffic was load balanced to a different real server (192.168.1.1).