


Source NAT for Servers Lab:

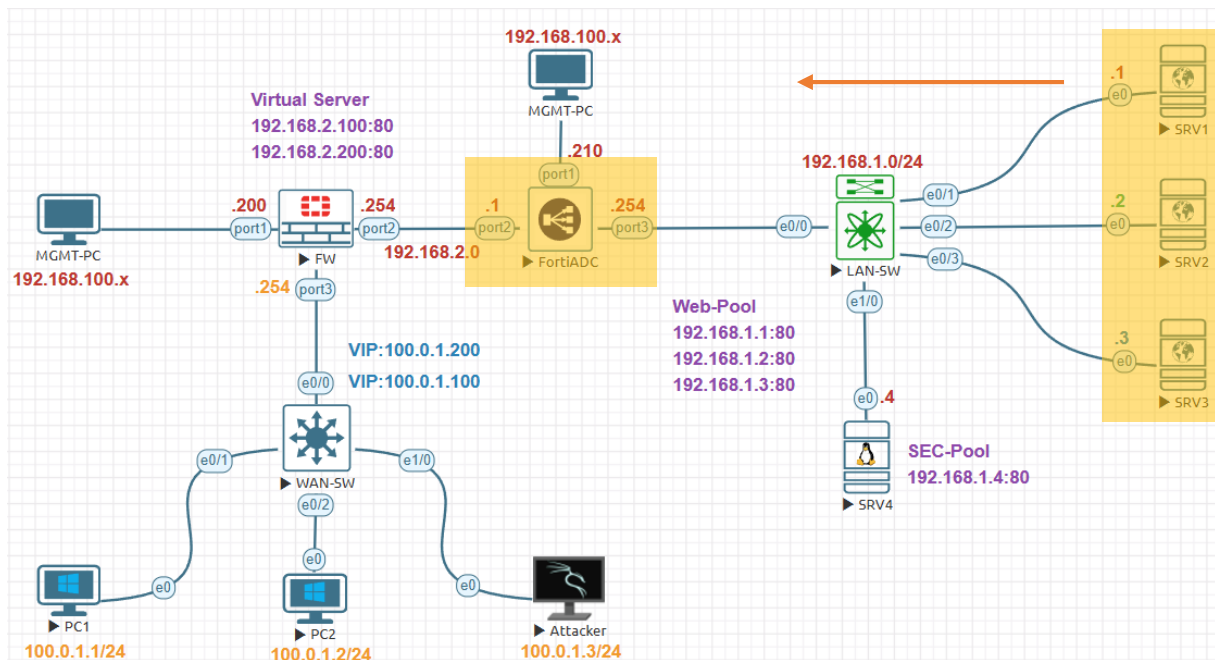


Management Subnet	192.168.100.0/24
FortiGate Management IP	192.168.100.200
FortiADC Management IP	192.168.100.210
Internal Servers Subnet	192.168.1.0/24
FortiADC External Subnet	192.168.2.0/24
FortiGate Firewall External	100.0.1.0/24
FortiADC Internal IP Address	192.168.1.254
FortiADC External IP Address	192.168.2.1
FortiGate Firewall Internal IP	192.168.2.254
FortiGate Firewall External IP	100.0.1.254
SRV1 IP Address	192.168.1.1
SRV2 IP Address	192.168.1.2
SRV3 IP Address	192.168.1.3
SRV3 IP Address	192.168.1.4
Virtual Sever-1	192.168.2.100
Virtual Sever-2	192.168.2.200
FortiGate VIP-1	100.0.1.100
FortiGate VIP-2	100.0.1.200
External PC1 IP Address	100.0.1.1
External PC2 IP Address	100.0.1.2
External PC3 IP Address	100.0.1.3


Before configuring **Source NAT**, verify the connectivity of the server by attempting to access the internet and which are not reachable due to NAT.

```
SRV1
File Edit View Options Transfer Script Tools Window Help
Enter host <Alt+R>
FortiADC SRV1 x
root@SRV1:~#
root@SRV1:~# ping 8.8.8.8
PING 8.8.8.8 (8.8.8.8) 56(84) bytes of data.
```

Go to **Networking > NAT** The configuration page displays the **Source** Tab. Click **Create New** to display the configuration editor.

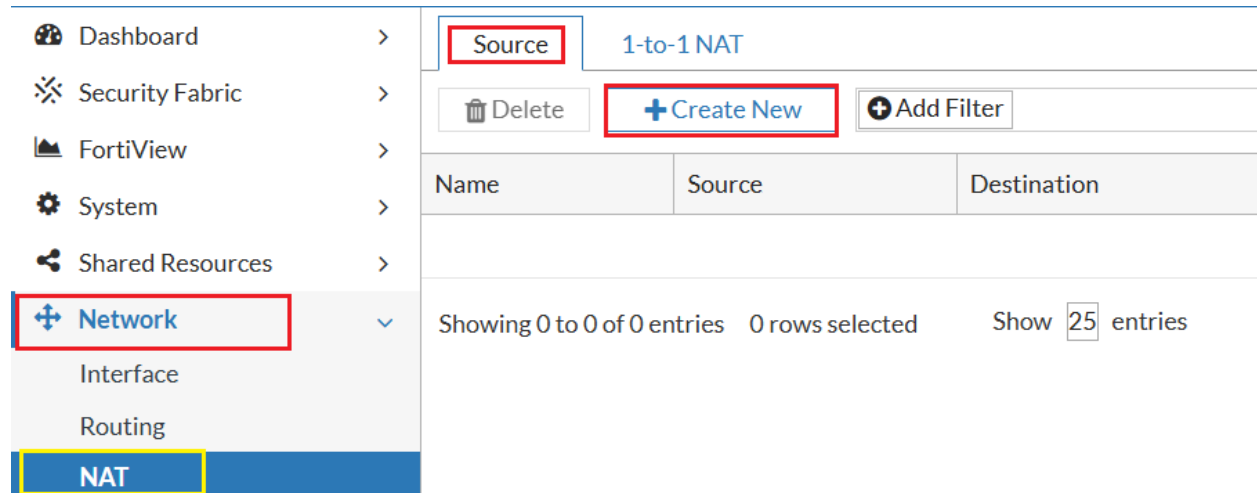

Complete the configuration and click **Save** the configuration.

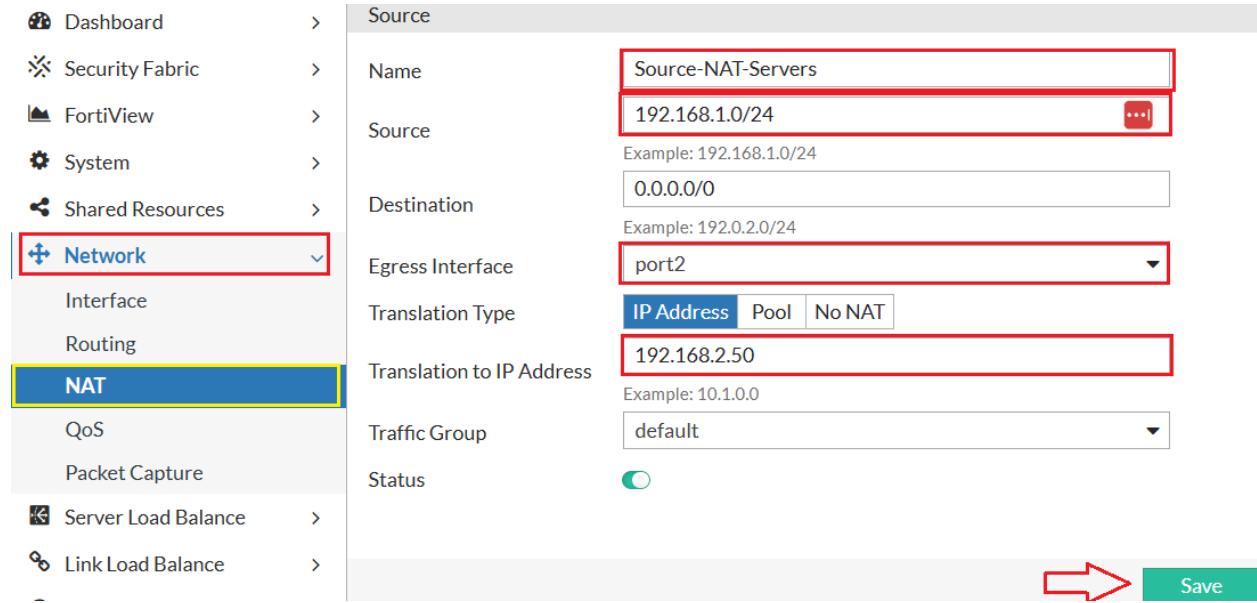

Finally, **Source NAT** rule has been created shown below.

Dashboard > Security Fabric > FortiView > System > Shared Resources > Network > Interface Routing NAT	Source	1-to-1 NAT		
	Delete	Create New Add Filter		
	Name	Source	Destination	Egress
	Source-NAT-Servers	192.168.1.0/24	0.0.0.0/0	port2
Showing 1 to 1 of 1 entries 0 rows selected Show 25 entries				

Let's try to access internet again from these three server this time its reachable.

```
✓ FortiADC ✓ SRV1 × ✓ SRV2
root@SRV1:~#
root@SRV1:~# ping 8.8.8.8
PING 8.8.8.8 (8.8.8.8) 56(84) bytes of data.
64 bytes from 8.8.8.8: icmp_seq=1 ttl=115 time=66.5 ms
64 bytes from 8.8.8.8: icmp_seq=2 ttl=115 time=65.6 ms
64 bytes from 8.8.8.8: icmp_seq=3 ttl=115 time=67.0 ms
64 bytes from 8.8.8.8: icmp_seq=4 ttl=115 time=65.8 ms
^~

✓ FortiADC ⚠ SRV1 ✓ SRV2 ×
root@SRV2:~# ping 8.8.8.8
PING 8.8.8.8 (8.8.8.8) 56(84) bytes of data.
64 bytes from 8.8.8.8: icmp_seq=1 ttl=115 time=72.1 ms
64 bytes from 8.8.8.8: icmp_seq=2 ttl=115 time=64.4 ms
64 bytes from 8.8.8.8: icmp_seq=3 ttl=115 time=65.5 ms
64 bytes from 8.8.8.8: icmp_seq=4 ttl=115 time=65.3 ms
64 bytes from 8.8.8.8: icmp_seq=5 ttl=115 time=66.3 ms
64 bytes from 8.8.8.8: icmp_seq=6 ttl=115 time=69.7 ms
64 bytes from 8.8.8.8: icmp_seq=7 ttl=115 time=65.7 ms
.

✓ FortiADC ✓ SRV1 ✓ SRV2 ✓ SRV3 ×
root@SRV3:~#
root@SRV3:~# ping 8.8.8.8
PING 8.8.8.8 (8.8.8.8) 56(84) bytes of data.
64 bytes from 8.8.8.8: icmp_seq=1 ttl=115 time=66.3 ms
64 bytes from 8.8.8.8: icmp_seq=2 ttl=115 time=65.7 ms
64 bytes from 8.8.8.8: icmp_seq=3 ttl=115 time=65.2 ms
64 bytes from 8.8.8.8: icmp_seq=4 ttl=115 time=66.9 ms
■
```

Open Console or SSH connection to the FortiADC, Enter the following CLI command to enable the sniffer and capture the traffic:

FortiADC # diagnose sniffer packet any "icmp" 4

```
FortiADC # diagnose sniffer packet any "icmp" 4
interfaces=[any]
filters=[icmp]
0.879291 port3 in 192.168.1.1 -> 8.8.8.8: icmp: echo request
0.879314 port2 out 192.168.2.50 -> 8.8.8.8: icmp: echo request
0.943069 port2 in 8.8.8.8 -> 192.168.2.50: icmp: echo reply
0.943091 port3 out 8.8.8.8 -> 192.168.1.1: icmp: echo reply
1.879929 port3 in 192.168.1.1 -> 8.8.8.8: icmp: echo request
1.879956 port2 out 192.168.2.50 -> 8.8.8.8: icmp: echo request
1.947295 port2 in 8.8.8.8 -> 192.168.2.50: icmp: echo reply
1.947313 port3 out 8.8.8.8 -> 192.168.1.1: icmp: echo reply
2.879966 port3 in 192.168.1.1 -> 8.8.8.8: icmp: echo request
2.879984 port2 out 192.168.2.50 -> 8.8.8.8: icmp: echo request
2.944863 port2 in 8.8.8.8 -> 192.168.2.50: icmp: echo reply
2.944887 port3 out 8.8.8.8 -> 192.168.1.1: icmp: echo reply
3.880692 port3 in 192.168.1.1 -> 8.8.8.8: icmp: echo request
3.880714 port2 out 192.168.2.50 -> 8.8.8.8: icmp: echo request
3.945068 port2 in 8.8.8.8 -> 192.168.2.50: icmp: echo reply
3.945090 port3 out 8.8.8.8 -> 192.168.1.1: icmp: echo reply
```

The source IP address of the Sever traffic was translated to 192.168.2.50 which was configured.

Egress Interface	port2
Translation Type	☒ IP Address ☐ Pool ☐ No NAT
Translation to IP Address	192.168.2.50

Make sure you have proper static/default route configured in FortiADC.

Dashboard > Security Fabric > FortiView > System > Shared Resources > Network > Interface Routing	Static Destination 0.0.0.0 Example: 192.0.2.5/24 2001:0db8:85a3::8a2e:0370:7334/64 Gateway 192.168.2.254 Example: 192.0.2.1 2001:0db8::1 Distance 10 Default: 10 Range: 1-255
---	---

Make sure proper static/default route is configured in Firewall as well.

FW			
Dashboard			
Network			
Interfaces			
DNS			
Packet Capture			
SD-WAN			
Static Routes			

Destination	Gateway IP	Interface
0.0.0.0/0	192.168.100.1	MGMT (port1)
192.168.2.0/24	192.168.2.1	FortiADC-LAN (port2)

Make sure Firewall Policy and NAT is configured.

FW	
Dashboard	
Network	
Policy & Objects	
Firewall Policy	
IPv4 DoS Policy	
Addresses	
Internet Service Database	
Services	
Schedules	
Virtual IPs	
IP Pools	
Protocol Options	
Traffic Shaping	
Security Profiles	
VPN	
User & Authentication	
System	

Edit Policy	
Name	FortiADC-to-Internet
Incoming Interface	FortiADC-LAN (port2)
Outgoing Interface	MGMT (port1)
Source	all
Destination	all
Schedule	always
Service	ALL
Action	ACCEPT DENY
Inspection Mode	Flow-based Proxy-based
Firewall / Network Options	
NAT	ON
IP Pool Configuration	Use Outgoing Interface Address Use Dynamic IP Pool