


Standard ACLs:

- o Standard ACLs identify traffic in Cisco ASA by source address only.
- o Standard ACLs cannot be applied to interfaces to control traffic.
- o There are few features that use them: route maps and VPN filters.
- o VPN filters also allow extended ACL, limit standard ACL use to route maps.
- o Standard ACLs are supported in routed and transparent firewall modes.
- o Standard Access Control Lists (ACLs) do not allow IP version 6 addresses.
- o Access List OSPF standard permit 192.168.12.0 255.255.255.0

Lab Time:

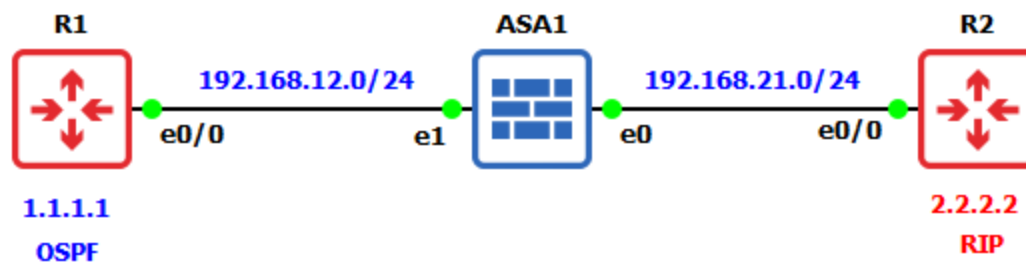

R1 Basic Configuration

```
R1(config)#interface e0/0
R1(config-if)#ip add 192.168.12.1 255.255.255.0
R1(config-if)#no shutdown
R1(config-if)#exit
```

```
R1(config)# interface loopback 1
R1(config-if)#ip address 1.1.1.1 255.0.0.0
```

R2 Basic Configuration

```
R2(config)#interface e0/0
R2(config-if)#ip add 192.168.21.2 255.255.255.0
R2(config-if)#no shutdown
R2(config-if)#exit
```

```
R2(config)# interface loopback 2
R2(config-if)#ip address 2.2.2.2 255.0.0.0
```

ASA1 Configuration

```
ASA1(config)#interface Ethernet1
ASA1(config-if)#nameif inside
ASA1(config-if)#security-level 100
ASA1(config-if)#ip address 192.168.12.100
ASA1(config-if)#no shutdown
```

```
ASA1(config)#interface Ethernet0
ASA1(config-if)#nameif outside
ASA1(config-if)#security-level 0
ASA1(config-if)#ip address 192.168.21.100
ASA1(config-if)#no shutdown
```

OSPF Configuration in R1

```
R1(config)#router ospf 1
R1(config-router)#network 1.0.0.0 0.255.255.255 area 0
R1(config-router)#network 192.168.12.0 0.0.0.255 area 0
```

RIP Configuration in R2

```
R2(config)#router rip
R2(config-router)#network 2.0.0.0
R2(config-router)#network 192.168.21.0
R2(config-router)#version 2
```

OSPF and RIP Configuration in ASA

```
ASA(config)# router ospf 1
ASA(config-router)# network 192.168.12.0 255.255.255.0 area 0
ASA(config)# router rip
ASA(config-router)# network 192.168.21.0
ASA(config-router)# version 2
```


Redistribute RIP Into OSPF

```
ASA(config)# router ospf 1
ASA(config-router)# redistribute rip metric 4
```

Redistribute OSPF Into RIP

```
ASA(config)# router rip
ASA(config-router)# redistribute ospf 1 metric 5
```

Verification Commands
ASA# show route
R1#show ip route
R2#show ip route
R1# ping 2.2.2.2

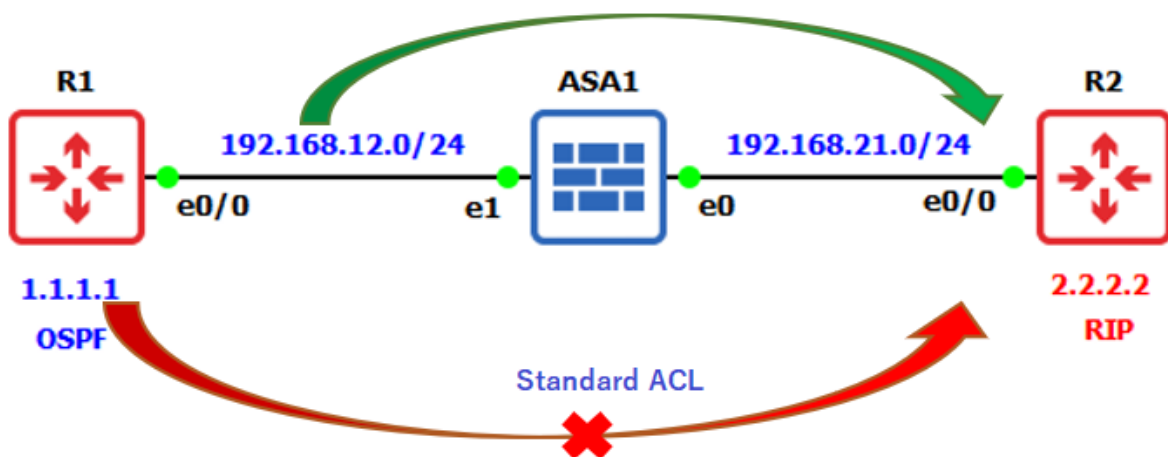

Standard ACL to Block OSPF Route
ASA(config)# access-list ospf standard permit 192.168.12.0 255.255.255.0
Create Route Map
ASA(config)# route-map stop permit
ASA(config-route-map)# match ip address ospf
Call Route Map in Redistribution
ASA(config)# router rip
ASA(config-router)# no redistribute ospf 1
ASA(config-router)# redistribute ospf 1 metric 5 route-map stop
Verification Commands
ASA(config-router)# show access-list
R2#show ip route