

THE COOPER UNION  
ALBERT NERKEN SCHOOL OF ENGINEERING

A Partitioned Autoencoder  
for Audio De-Noising

by  
Ethan Lusterman

A thesis submitted in partial fulfillment  
of the requirements for the degree of  
Master of Engineering

September 2016

Professor Sam Keene, Advisor

THE COOPER UNION FOR THE  
ADVANCEMENT OF SCIENCE AND ART

ALBERT NERKEN SCHOOL OF ENGINEERING

This thesis was prepared under the direction of the Candidate's Thesis Advisor and has received approval. It was submitted to the Dean of the School of Engineering and the full Faculty, and was approved as partial fulfillment of the requirements for the degree of Master of Engineering.

---

Dean, School of Engineering                      Date

---

Prof. Sam Keene, Thesis Advisor                      Date

# Acknowledgements

This thesis would not be possible without the guidance and support from my advisor, Dr. Sam Keene. He has mentored me since I was an undergraduate, and I am grateful for him helping this project come to life. I also want to thank Christopher Curro, my informal second advisor who helped me to think outside the box and for whom the overall system architecture is named after.

I would like to thank Kate Thorsen for pushing me past my potential and encouraging me to stay positive despite the frustrations of research. Lastly, I would like to thank my friends and family for their support. This thesis would not have been possible without all their support.

# Abstract

Traditional audio denoising systems are often linear time-invariant (LTI) and often require access to clean data to properly train to remove noise. Since clean audio is often unavailable, we build on a partitioned denoising autoencoder for denoising audio signals when clean examples are unavailable for training. In addition, the nonlinearity of a neural network architecture provides additional gains over standard linear models. We compare existing semi-supervised denoising systems as well as canonical supervised denoising autoencoders. We show that for moderate levels of noise, our autoencoder can outperform existing schemes.

# Contents

<b>1</b>	<b>Introduction</b>	<b>1</b>
<b>2</b>	<b>Background</b>	<b>3</b>
2.1	Machine Learning . . . . .	3
2.1.1	Regression . . . . .	4
2.2	Neural Networks . . . . .	4
2.2.1	Dense Layer . . . . .	6
2.2.2	Denoising Autoencoder . . . . .	6
2.2.3	Network Training . . . . .	7
2.2.4	Choice of Activation Function . . . . .	7
2.2.5	Minibatch Training . . . . .	8
2.2.6	Batch Normalization . . . . .	9
2.3	Signals and Systems . . . . .	10
2.3.1	Signals . . . . .	10
2.3.2	Convolution . . . . .	11
2.3.3	Frequency Transforms . . . . .	11
2.3.4	Windowing and Perfect Reconstruction . . . . .	13
2.3.5	Window Size and Frequency v. Time Resolution Tradeoff	13
2.3.6	Noise and Signal-to-Noise Ratio . . . . .	14
<b>3</b>	<b>Signal Model and Data</b>	<b>15</b>
3.1	Network Input and Output . . . . .	15
3.2	Signal and Noise Choices . . . . .	17
3.3	Other Network Parameters . . . . .	17
<b>4</b>	<b>De-noising Architectures</b>	<b>19</b>
4.1	Supervised Autoencoder . . . . .	19
4.2	Partitioned Autoencoder . . . . .	21
4.2.1	Phase Reconstruction . . . . .	23
4.3	Curro Autoencoder . . . . .	24

<b>5</b>	<b>Results</b>	<b>27</b>
5.1	Supervised Autoencoder . . . . .	28
5.1.1	Batch Normalized Input . . . . .	29
5.1.2	Non-Batch Normalized Input . . . . .	29
5.2	Partitioned Autoencoder . . . . .	29
5.3	Partitioned Curro Autoencoder . . . . .	29
5.4	Comparison of Loss Convergence . . . . .	29
5.5	Comparison of Mean Squared Error Convergence . . . . .	29
<b>6</b>	<b>Conclusions and Future Work</b>	<b>30</b>
6.1	Conclusions . . . . .	30
6.2	Future Work . . . . .	31
6.2.1	Models . . . . .	31
6.2.2	Data . . . . .	32
<b>A</b>	<b>Simulation Code</b>	<b>39</b>

## List of Figures

1	Example neural network . . . . .	5
2	Modified Rectified Linear Unit Activation . . . . .	20
3	Example Partitioned Masking Matrix . . . . .	22
4	Loss at various SNRs for Supervised Single-Layer Autoencoder with Batch Normalization at the Input . . . . .	29
5	MSE at various SNRs for Supervised Single-Layer Autoencoder with Batch Normalization at the Input . . . . .	29
6	Loss at various SNRs for Supervised Single-Layer Autoencoder without Batch Normalization at the Input . . . . .	30
7	MSE at various SNRs for Supervised Single-Layer Autoencoder with Batch Normalization at the Input . . . . .	30
8	Loss at various SNRs for Single-Layer Partitioned Autoencoder [1]	31
9	MSE at various SNRs for Single-Layer Partitioned Autoencoder [1] . . . . .	31
10	Loss at various SNRs for Single-Layer Curro Autoencoder . .	32
11	MSE at various SNRs for Single-Layer Curro Autoencoder . .	32
12	Loss Comparison of Various Networks at -6 dB . . . . .	33
13	Loss Comparison of Various Networks at -3 dB . . . . .	33
14	Loss Comparison of Various Networks at 0 dB . . . . .	34
15	Loss Comparison of Various Networks at 3 dB . . . . .	34
16	Loss Comparison of Various Networks at 6 dB . . . . .	35
17	MSE Comparison of Networks at -6 dB . . . . .	35
18	MSE Comparison of Networks at -3 dB . . . . .	36
19	MSE Comparison of Networks at 0 dB . . . . .	36
20	MSE Comparison of Networks at 3 dB . . . . .	37
21	MSE Comparison of Networks at 6 dB . . . . .	37

## Table of Nomenclature



# 1 Introduction

Advances in smartphone technology have led to smaller devices with more powerful audio hardware, allowing for common consumers to make higher quality recordings. However, recorded speech and music are subject to noisy conditions, often hampering intelligibility and listenability. The goal of denoising audio recordings is to improve intelligibility and perceived quality. A variety of applications of audio denoising exist, including listening to a recording of a band or an artist’s live performance in a noisy crowd, or listening to a recorded conversation or speech under noisy conditions.

A common technique for denoising involves the use of autoencoder neural networks. [2] Advances in parallel graphics processing units (GPU) and in machine learning algorithms have allowed for training deeper networks faster, utilizing more hidden layers with more neurons.

Prior work in denoising audio has involved the use of noise-free training data. Since common consumers do not often have access to clean audio, we seek to denoise without the use of clean audio. Other work has touched on such a semi-supervised scenario but was used more as a preprocessing step to a classification algorithm than as time-domain denoising. [1]

In this thesis, we compare several neural network architectures and problem scenarios, ranging from data input types, level of noise, depth of network, training objectives, and more. In Chapter 2, we present background information on machine learning, neural networks, and signal processing as well as prior work in audio denoising. In Chapter 3, we detail the problem formally as well as introduce our signal model and sourced data. In Chapter 4, we detail all considered network architectures. In Chapter 5, we compare results

from different data inputs, levels of noise, network architectures, and training objectives and discuss methods of evaluation. Finally, we make conclusions and recommendations for future work in Chapter 6.

## 2 Background

### 2.1 Machine Learning

Machine learning involves the use of computer algorithms to make decisions based on training data. Generally, this falls into categorizing input data (classification) or determining a mathematical function to determine a continuous output given an input (regression). Popular classification examples include recognizing handwritten digits (MNIST) as well as determining whether an image contains a cat or a dog. (REF) An example of a regression problem is determining the temperature given a set of input features (humidity, latitude, longitude, date, etc.).

Problems where training data contain input data vectors as well as the correct output vectors (targets) are known as supervised learning problems. Training a model to denoise audio where noise was introduced to the clean audio would be a supervised learning problem. On the other hand, training a model to denoise audio where the underlying clean signal is not known is an unsupervised learning problem. Different loss (objective) functions and neural network architectures can be exploited to accomplish denoising without the clean data.

For the purposes of this thesis, we use machine learning to determine an underlying nonlinear function that removes noise from time slices of audio (i.e. regression). These slices can then be pieced back together through overlap-add resynthesis. To clarify, this is a general linear model that maps an input noisy audio vector  $y[n] = x[n] + N[n]$  to  $\tilde{x}[n]$ , a target denoised audio vector, where  $x[n]$  is the underlying clean signal and  $N[n]$  is the additive background noise.

### 2.1.1 Regression

A classical regression technique is linear regression, where one or more independent variables  $x_i$  are used to determine a scalar dependent variable  $y$ . The case of a single independent variable  $x$  is known as simple linear regression. More formally, for  $k$  independent variables, we would like to determine a weight vector  $\mathbf{w}$  and bias vector  $\mathbf{b}$ :

$$y_i = w_1x_{i1} + \cdots + w_kx_{ik} + b_i, \quad i = 1 \dots, n \quad (1)$$

$$\mathbf{y} = \mathbf{x}^T \mathbf{w} + \mathbf{b} \quad (2)$$

where the rows of  $\mathbf{x}^T$  are the example input observations and  $\mathbf{y}$  and  $\mathbf{b}$  are column vectors.

By extension, the case of linearly estimating a vector output giving a vector input is known as a generalized linear model. A canonical example would be estimating a sine wave  $x[n]$  over some number of  $N$  samples given noisy samples  $y[n] = x[n] + N[n]$ .

## 2.2 Neural Networks

In this thesis, we deal only with feed-forward neural networks, which are essentially directed acyclic graphs (DAG) for computation. In other words, information only moves through the network in one direction. An example neural network is shown in Figure 1.

The connections in a neural network can be represented by linear combinations of the input variables with learned weights  $\mathbf{w}$ . [3] Unlike standard linear models however, neural networks apply a nonlinear activation  $f(\bullet)$  at the output of each neuron. The circle nodes in a neural network diagram can be thought

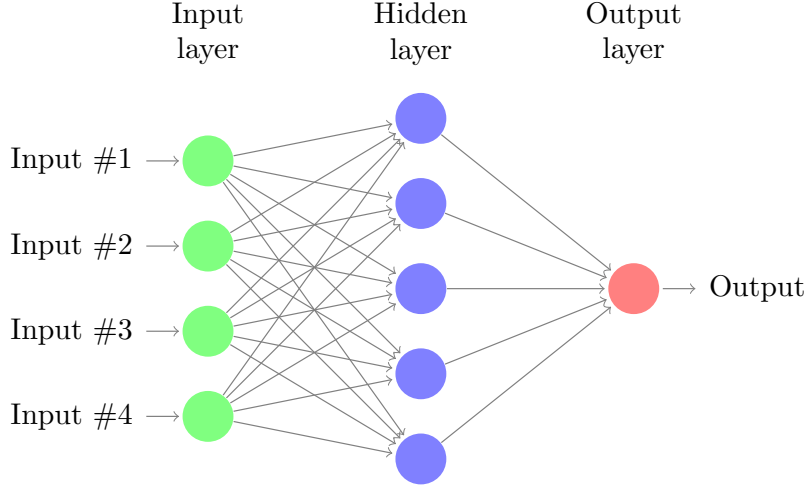


Figure 1: An example neural network. There are 4 input variables, 1 hidden layer with 5 neurons, and 1 output variable.

of as the sum of the linear combinations of the connection edges and the application of the bias and activation function. Therefore, a hidden neuron  $z_j$  in a network with  $N$  input variable nodes,  $M$  hidden nodes, and  $K$  output nodes takes on the value

$$z_j = f(a_j) \quad (3)$$

where the activation  $a_j$  is given by

$$a_j = \sum_{i=1}^N w_{ji}^{(1)} x_i + w_{j0}^{(1)} \quad (4)$$

The connection values  $w_{ji}$  are referred to as weights, and the scalars  $w_{j0}$  are referred to as biases. Note that the superscripted numbers refer to the Then, the output  $y_k$  is given by

$$y_k = g(a_k) \quad (5)$$

where the output activation  $ak$  is given by

$$a_k = \sum_{j=1}^M w_{kj}^{(2)} z_j + w_{k0}^{(2)} \quad (6)$$

We are free to choose activation functions, which we will discuss later. However, note that at the output, the function  $g(\cdot)$  is often an identity for regression problems and a sigmoid  $\sigma(\cdot)$  for classification problems.

Often, the weights and biases are grouped into a weight vector  $\mathbf{w}$ . In other words, similar to the linear models described earlier, a neural network is a nonlinear function of input variables  $\{x_i\}$  to output variables  $\{y_k\}$  where the parameters of the function are learned via training techniques.

### 2.2.1 Dense Layer

Described in the previous section, we refer to a dense layer as a fully connected neural network, in which no interconnections between neurons are missing at each layer. Dense layers can be prone to overfitting. However, as we mention later, overfitting is not an immediate concern for the purposes of this thesis.

### 2.2.2 Denoising Autoencoder

An autoencoder is normally an abstraction of neural networks in which an encode function  $\mathbf{Z} = f(\mathbf{X})$  and a decode function  $\hat{\mathbf{X}} = g(\mathbf{Z})$  are learned to learn a lower-dimensional representation of some input  $\mathbf{X}$ . [1] A denoising autoencoder is a supervised process whereby the clean input is first corrupted by some stochastic process  $\mathbf{Y} = u(\mathbf{X})$ . In other words, the neural network input would be a noisy input  $\mathbf{Y}$ , and the network would try to learn weights such that the network output  $\hat{\mathbf{X}}$  approximates the clean input  $\mathbf{X}$ . Another way to frame it is that your network is learning the inverse function of the noise process  $u(\mathbf{x})$ .

### 2.2.3 Network Training

In order to train a neural network, we must update the weights such that we minimize a loss function, often some kind of sum-of-square error function. [3] Often, a stochastic gradient descent (SGD) approach is taken to determine the weights that minimize the loss function.

### 2.2.4 Choice of Activation Function

The most common activation functions used are the logistic sigmoid function and the hyperbolic tangent. [2] The logistic sigmoid function is given by

$$g(x) = \frac{1}{1 + \exp(-x)} \quad (7)$$

Note that the sigmoid function has an output on the range  $(0, 1)$ . The hyperbolic tangent function ( $\tanh$ ) is given by

$$g(x) = \frac{\sinh x}{\cosh x} \quad (8)$$

$$= \frac{\exp(x) - \exp(-x)}{\exp(x) + \exp(-x)} \quad (9)$$

$$= \frac{1 - \exp(-2x)}{1 + \exp(-2x)} \quad (10)$$

Note that the hyperbolic tangent function has an output on the range  $(-1, 1)$ .

Generally, our choice of nonlinearity should be chosen such that the expected range of desired output matches the nonlinearity's. In the case of audio denoising, different activations can be chosen depending on the input format. For example, time-domain audio frames are often processed with a digital floating point representation on the range of  $[-1, 1]$ . In such a case, the hyperbolic tangent might be appropriate. On the other hand, if we were working with

magnitude spectra of an audio signal, we would use a linearity with an output range of  $[0, \infty]$ .

Recently, a more popular activation function which has in use is the rectified linear unit (ReLU). [4] The ReLU is defined by the following:

$$g(x) = \begin{cases} 0 & \text{if } x < 0 \\ x & \text{if } x \geq 0 \end{cases} \quad (11)$$

In other words,  $g(x) = \max(0, x)$ . This function satisfies the range of output we expect for magnitude spectra. In terms of gradient calculations, the zero derivative for negative input values of  $x$  can cause nodes to not be activated, potentially leading to gaps in information at the output and slower training time. To combat this, variations of the ReLU are used which have small, non-zero gradients for negative input values. For example, leaky ReLU's are defined by

$$g(x) = \begin{cases} 0.01x & \text{if } x < 0 \\ x & \text{if } x \geq 0 \end{cases} \quad (12)$$

Advantages of ReLU's include better gradient propagation as well as fast computation and sparse representation. Some disadvantages include non-differentiability at  $x = 0$ . Also, depending on use case, sparse representation might not be desired.

### 2.2.5 Minibatch Training

Historically, neural networks were trained one example at a time (online) or in a batch (all examples at once). [5] For the online approach, the network weights are updated after gradients are calculated and backpropagated for



each training example. On the other hand, the batch approach accumulates average gradients for all examples and then updates the network weights. The batch approach might approximate the true gradients better than the online approach, but the online approach tends to have faster training time and convergence. [5] This is because with an online approach, the network is less likely to get stuck in a local minimum.

Minibatch training has become more popular recently. Serving as a midway point between the two approaches, minibatch training exposes the network to a small number of examples and then accumulates gradients and updates the network weights. The trend toward minibatch training comes at a time where parallel computing resources are easily accessible.

### 2.2.6 Batch Normalization

Batch normalization is a technique that helps to speed up training time and convergence. Batch normalization accumulates learned statistics of the network to help achieve loss convergence more quickly. More formally, an input minibatch  $x$  is normalized by the following:

$$y = \frac{x - \mu}{\sqrt{\sigma^2 + \epsilon}}\gamma + \beta \tag{13}$$

[6]. During training, the minibatches are normalized to zero-mean, unit-variance and transformed by parameters  $\gamma$  and  $\beta$ . At inference time, the learned parameters are instead used, which are made up of the average statistics from training.

Batch normalization prevents activations from saturating from widely varying input minibatches. This allows us to use faster learning rates and be less careful about how to initialize our parameters. [6]

## 2.3 Signals and Systems

Domain knowledge of discrete audio signals and systems better informs our decisions for an audio denoising system, so some background information on signals and systems as it pertains to this thesis is detailed below.

### 2.3.1 Signals

We deal exclusively with discrete-time audio signals in this thesis. A discrete-time audio signal  $x[n]$  is represented as a sequence of numbers (samples), where each integer-valued slot  $n$  in the sequence corresponds to a unit of time based on the sampling frequency  $f_s$ . This comes from sampling the continuous-time audio signal  $x_c(t)$ :

$$x[n] = x_c(nT) \tag{14}$$

where  $T = 1/f_s$ . For example, a 1-second speech signal sampled at 8kHz has 8000 samples. Furthermore, digital signals also have discrete valued sample amplitudes. For the purposes of this thesis, the bit depths of computers we use for analysis are high enough to allow for perfect reconstruction between continuous-time signals and digital signals.

We also assume signals collected have been properly sampled according to the Nyquist-Shannon sampling theorem, which states that a discrete-time signal must be sampled at at least twice the highest frequency present in the signal to prevent aliasing of different frequencies. For example, speech signals generally have information up to 8kHz, so many speech signals are sampled at 16kHz. Music is more complex in that signals often span up to about 20kHz, so CD quality recordings are often sampled at 44.1kHz or higher. For this thesis, we use recordings sampled at 44.1kHz or lower.

### 2.3.2 Convolution

The discrete-time convolution operation takes two sequences  $x[n]$  and  $h[n]$  and outputs a third sequence  $y[n] = x[n] * h[n]$ :

$$y[n] = \sum_{k=-\infty}^{\infty} x[k]h[n-k] \quad (15)$$

Convolution is commutative, so  $x[n] * h[n] = h[n] * x[n]$  holds true.

A linear, time-invariant (LTI) system is characterized by its impulse response  $h[n]$ , which allows us to determine samples  $y[n]$  when  $x[n]$  is subject to  $h[n]$ . For the purposes of this thesis, our underlying clean signal  $x[n]$  might be subject to the conditions of an acoustic environment  $h[n]$  and crowd noise  $N[n]$ :

$$y[n] = h[n] * x[n] + N[n] \quad (16)$$

In this scenario, our system would attempt to recover  $h[n] * x[n]$  and possibly even  $x[n]$  if the acoustic environment were deemed “noisy enough” due to echo and reverberation.

One of our proposed systems also incorporates convolutional neural networks (CNN) which use convolutions between frames of samples instead of simple linear combinations (discussed later).

### 2.3.3 Frequency Transforms

In some of our proposed systems, we use a frequency transformed version of the input signal as a preprocessing step to the system input. While no new information is gained from transforming the input, networks often respond

better to determining the value of the magnitude of varying frequencies at a time slice instead of the individual time samples.

The frequency transform we use in this thesis is the discrete-time Fourier transform (DTFT). A sequence of  $N$  discrete-time samples is transformed into another sequence of  $N$  samples where each index then corresponds to a frequency bin. The DTFT  $X[k]$  of a signal  $x[n]$  is given by the following:

$$X[k] = \sum_{n=0}^{N-1} x[n] W_N^{kn} \quad (17)$$

where the twiddle factor  $W_N$  is given by  $W_N = e^{-j(2\pi/N)}$ . Then the reconstruction of  $x[n]$  from  $X[k]$  is given by:

$$x[n] = \frac{1}{N} \sum_{k=0}^{N-1} X[k] W_N^{-kn} \quad (18)$$

In this thesis, we also exploit the main duality between the time and frequency domain using the convolution theorem, which states that convolution in time is equivalent to multiplication in frequency and vice versa:

$$\mathcal{F}\{h[n] * x[n]\} = H[k]X[k] \quad (19)$$

$$\mathcal{F}^{-1}\{H[k] * X[k]\} = h[n]x[n] \quad (20)$$

This allows us to effectively treat our network as a non-linear filter that can denoise small time/frequency slices of our noisy signal, which can then be pieced back together using overlap-add resynthesis. We detail this in the next section.

### 2.3.4 Windowing and Perfect Reconstruction

To window a signal is to multiply a window function  $w[n]$  by the frame, i.e.  $w[n]x[n]$  over the frame length  $N$ . Because we are training a network to denoise small segments of a larger audio signal, we window the signal segments. This accommodates the finite-length requirement of the DTFT and helps to prevent spectral leakage. [7]

Also, to be able to properly reconstruct our signal, we use a window function and corresponding overlapping frame percentage to accomplish perfect reconstruction. The corresponding overlapping frame percentage is set such that the window sums to a constant for all time. For example, a rectangular window  $w[n] = 1$  over an interval of length  $N$  has an overlap of 0% to sum to a constant 1 for all time. Another popular window is the Hanning window, defined over an interval  $N$  by the following:

$$w[n] = \frac{1}{2} \left( 1 - \cos \left( \frac{2\pi n}{N-1} \right) \right) \quad (21)$$

For the Hann window, the perfect reconstruction overlap is a frame length of  $N = 50\%$ .

### 2.3.5 Window Size and Frequency v. Time Resolution Tradeoff

We must consider window size as a hyperparameter to our system. In general, shorter windows give rise to better time resolution at the cost of frequency resolution. On the other hand, longer windows give rise to better frequency resolution at the cost of time resolution. To illustrate, consider FIGURE.

### 2.3.6 Noise and Signal-to-Noise Ratio

Since we are trying to denoise audio signals, we must discuss how we measure noise. One of the most common measures of degradation of signal quality from additive noise is signal-to-noise ratio (SNR), defined as the ratio of signal variance to noise variance. [DSP] For the signal  $y[n] = x[n] + N[n]$ , where  $x[n]$  is the signal of interest and  $N[n]$  is the additive noise, the SNR is defined as

$$SNR = \frac{\sigma_x^2}{\sigma_n^2} \quad (22)$$

where  $\sigma^2$  refers to the variance of the signal in question over some time interval. For the purposes of this thesis, we achieve desired a desired SNR for a simulation by scaling the noise to match the variance to the signal, then scaling the noise or the signal to achieve the desired SNR.

### 3 Signal Model and Data

#### 3.1 Network Input and Output

To simulate an audio denoising scheme, we define the following inputs and outputs. We take a known clean signal  $x[n]$  which we subject to additive noise  $N[n]$  using a specified SNR, resulting in the following noisy signal  $y[n]$ :

$$y[n] = x[n] + N[n] \quad (23)$$

To achieve a particular average SNR per simulation, we take the average signal energy for each minibatch of size  $B$  to determine a multiplicative scale factor  $k$  on the noise signal  $N[n]$ . For example, for additive white Gaussian noise (AWGN), we sample from the zero-mean, unit variance normal distribution (“randn” in Python) and determine our scale factor  $k$  as  $\sigma$  using the specified SNR in decibels:

$$\sigma_n^2 = \frac{1}{SNR_{lin}} \frac{1}{BN} \sum_{b=0}^{B-1} \sum_{n=0}^{N-1} x_b^2[n] \quad (24)$$

where  $SNR_{lin}$  is given by

$$SNR_{lin} = 10^{\frac{SNR_{db}}{10}} \quad (25)$$

In supervised scenarios, we allow the network to train with access to the ground truth  $x[n]$ . On the other hand, in semi-supervised scenarios, we only allow the network to train with access to a “soft label” indicating if the signal is (1) noise-only or (2) noise and possibly signal. [1] However, in both supervised and semi-supervised scenarios, our neural network input is one of the following:

1. Frames of  $y[n]$
2. Frames of  $\|Y[k]\|$
3. Magnitude spectrogram frames of  $Y[k]$
4. Complex spectrogram frames of  $Y[k]$

We choose the frame length  $L$ , time-domain window  $w[n]$ , and frame overlap percentage  $p$  as hyperparameters. Generally, we use 1024-sample frames at 16 kHz with a Hanning window with 50% overlap unless otherwise specified. In addition, for frequency frames, we use an FFT length the same length as our frame for a total of  $L/2$  frequency bins. Note that our choice of frame length and sampling rate allows us to balance time and frequency resolution. With the given frame length and sampling rate, we achieve a frequency resolution of 15.625 Hz/bin by the following:

$$\frac{f_s/2 \text{ Hz}}{N/2 \text{ bins}} = \frac{f_s}{N} \quad (26)$$

$$= 15.625 \text{ Hz/bin} \quad (27)$$

Similary, our time resolution is given by

$$\frac{N}{f_s} = 64 \text{ msec} \quad (28)$$

Since we want to evaluate the level of denoising in the time domain, we recombine the network outputs with the noisy phase components of the spectrum if necessary to obtain an estimate  $\hat{x}[n]$ . We then compare  $\hat{x}[n]$  to  $x[n]$ , in general using the mean squared error (MSE). For example, when our network outputs



frames of  $\|\hat{X}[k]\|$ , we take the inverse Fast Fourier transform (IFFT) using the noisy phase  $\angle Y[k]$  and use overlap-add to recombine the frames:

$$x[n] = \mathcal{F}^{-1}\{\|\hat{X}[k]\|e^{j\angle Y[k]}\} \quad (29)$$

### 3.2 Signal and Noise Choices

Our choice of signals include the following:

1. Sine waves with multiple frequencies and random amplitudes and phases
2. Clean speech signals
3. Studio music recordings
4. Live concert recordings

Similarly, our choice of noise signals include the following:

1. Additive white Gaussian noise (AWGN)
2. Restaurant noise

As mentioned above, we can use the average energy per minibatch to specify a given SNR for an experiment. We take several combinations of clean and noise signals and compare across multiple SNRs.

### 3.3 Other Network Parameters

Since our networks involve one or more neural network layers, we show some results compared to choices of nonlinearity, number of layers (depth), and number of nodes in each layer (width). Generally, we use an identity at the

network output and either the rectified linear unit (ReLU), a modified ReLU (mReLU), leaky rectify, hyperbolic tangent (tanh), or an exponential linear unit (elu).

## 4 De-noising Architectures

In the following sections, we detail all considered shallow network architectures. Note that these network architectures can easily be extended to deep networks by adding corresponding encode and decode layers before and after the latent representation, respectively. These networks can be trained using the various inputs detailed in Chapter 3. However, for the purposes of presenting first results, we consider single FFT frames only to compare networks.

### 4.1 Supervised Autoencoder

We adopt the shallow supervised autoencoder from [2]. Used for supervised denoising, we adopt the relative network size as well as their modified nonlinear activation function. The network structure is a single hidden layer, dense neural network. In other words, we can represent our network output  $\hat{X}_i[k]$  for various overlapping frames  $i = 1, \dots, N$  by the following:

$$\hat{X}_i[k] = f_1(\mathbf{W}^{(1)}\mathbf{h}_i^{(0)} + \mathbf{b}^{(1)}) \quad (30)$$

$$\mathbf{h}_i^{(0)} = f_0(\mathbf{W}^{(0)}Y_i[k] + \mathbf{b}^{(0)}) \quad (31)$$

This network is trained to estimate the various layer weight matrices  $\mathbf{W}^{(l)}$  and layer bias vectors  $\mathbf{b}^{(l)}$ .

Since we are estimating a magnitude spectrogram for values in the interval  $[0, \infty)$ , we use a nonlinear activation function whose support is on the same interval. A natural choice is the rectified linear unit (ReLU). However, as detailed in [2], the ReLU is subject to a 0-derivative for negative values. The modified ReLU used in [2], which we denote as mReLU, is given by the following:

$$f(x) = \begin{cases} x & \text{if } x \geq \epsilon \\ \frac{-\epsilon}{x-1-\epsilon} & \text{if } x < \epsilon \end{cases} \quad (32)$$

The choice of  $\epsilon$  used in [2] is  $10^{-5}$ . This modified ReLU allows for nodes to escape zero state since the derivative is always positive. An example plot of the nonlinearity is given in 2.

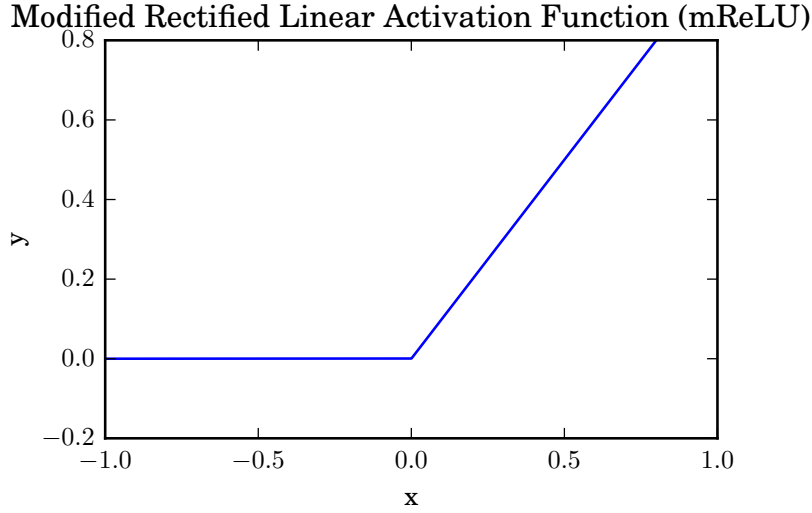


Figure 2: Modified Rectified Linear Unit Activation Function Plot

Since this network is supervised, we allow the training access to the original magnitude spectra  $X[k]$ . The loss function for training this network is defined as the mean squared error (MSE) between the network output and the clean spectra  $X[k]$ :

$$l(\mathbf{X}, \hat{\mathbf{X}}) = \|\mathbf{X} - \hat{\mathbf{X}}\|^2 \quad (33)$$

For our simulations, we also apply batch normalization at the input to help train more quickly and efficiently.

## 4.2 Partitioned Autoencoder

Adopted from [1], the partitioned autoencoder is a variation of a traditional autoencoder in which we do not know the noise corruption process or the underlying clean signals directly. This model more closely models a practical scenario. Since we don't have access to clean data, we rely instead on a "soft" label indicating whether we have a "noise-only" training example or a "noisy" training example which possibly has the desired signal present within it.

Depending on a number of factors, a traditional autoencoder can learn many different latent representations which ultimately learn to encode and decode the underlying clean signal. A partitioned autoencoder seeks to use regularization during training to give explicit meaning to the latent variables in the network. If we can identify noise-only components in our training data, we can potentially train the network to put noise-only information into one part of the latent space. Then, the rest of the latent variables should correspond to signal-only if a sufficient representation of the noise is learned. At inference time, we can then zero out the noise-only latent variables to accomplish denoising.

In [1], they use the following loss function to accomplish effective partitioning:

$$l(\mathbf{Y}, y) = \|\mathbf{Y} - \hat{\mathbf{X}}\|^2 + \frac{\lambda y}{\mathbf{C}} \|\mathbf{C} \odot f(\mathbf{Y})\|^2 \quad (34)$$

where  $\hat{\mathbf{X}} = g(f(\mathbf{Y}))$ , the latent variables are given by  $f(\mathbf{Y})$ ,  $\mathbf{C}$  is a masking matrix dependent on the minibatch and latent sizes taking on the value 1 for signal latents and 0 for noise or background latents.  $y$  corresponds to the aforementioned soft label which has value 0 for a signal-plus-noise example and 1 for a noise-only example.  $\lambda$  is a regularization coefficient which is set to

a higher value than normally used for regularization to enforce zeroing out of signal-based latents for noise-only examples.

In other words, when we train the network, we use minibatches with fixed ordering corresponding to the same proportion of signal-plus-noise examples and noise-only examples such that  $\mathbf{C}$  does not change on each training iteration. An example  $\mathbf{C}$  is given in Figure 3. For signal-plus-noise examples, the regularization term is 0, and the network seeks to reconstruct the noisy example. However, for noise-only examples, the network tries to put all of the latent energy into the pre-determined noise-only latent variables. In [1], they balance this by choosing 25% of minibatches to be noise-only as well as 25% of latent variables to be noise-only.

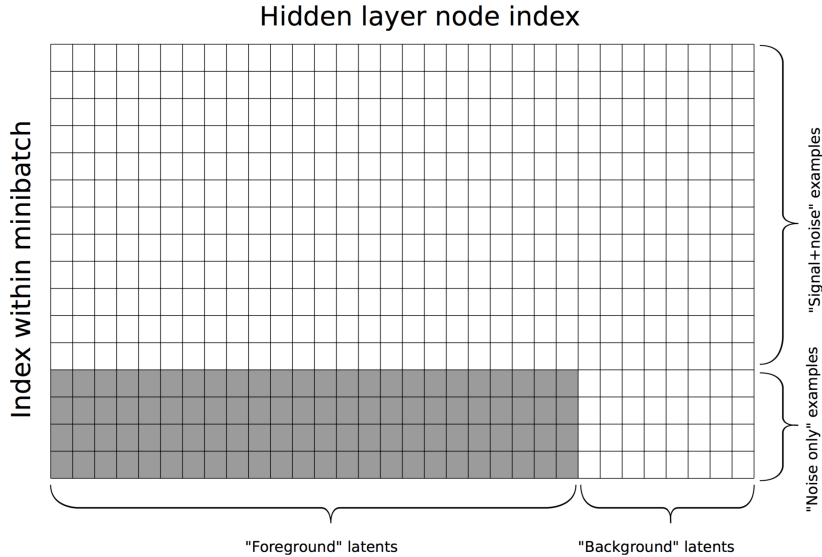


Figure 3: Example Partitioned Masking Matrix. [1] The gray area corresponds to signal (foreground) latents for noise-only examples. We want to penalize the network for any nonzero energy in the signal latents when there are noise-only examples.

Note that it is okay for noise-only examples to be mislabeled as signal-plus-noise, but the opposite would cause the signal to be misrepresented as noise.

Therefore, the soft labeling of examples should be cautious on the side of labeling as noise-only.

In [1], they use spectrogram frames as input. Their partitioned autoencoder is constructed as a shallow two-dimensional convolutional autoencoder with input normalization to zero-mean and unit-variance, maxpooling along the time index, and a ReLU nonlinearity before the latent layer. Their convolutional layer is constructed such that the frequency space is fully connected, and the convolution happens in time. The results of their autoencoder are presented in the frequency domain only, so we seek to adapt the partitioning concept to also recover cleaner time-domain audio.

Therefore, we use the same loss function as defined in Equation 34, but we use single magnitude spectrum frames and compare results on the mean squared error in the time-domain rather than in the frequency domain as their results presented. We also used the modified ReLU as presented from [2].

#### **4.2.1 Phase Reconstruction**

By extension, we combine the estimated magnitude spectra at the output with the original noisy phase. We can then recover a time-domain estimate of our desired signal using overlap-add resynthesis.

Other experiments we tried involved trying to explicitly or implicitly estimate the clean phase. One such explicit experiment involved training a parallel partitioned autoencoder with modified nonlinearities that tried to learn a clean phase representation. However, this ended up with a worse MSE and distorted the signal than using the original noisy phase. An implicit phase estimation example involved training the network using two channels as feature maps, where the real part of the frequency spectrum made up one feature map and

the imaginary part of the frequency spectrum made up the other. This also resulted in worse reconstructed signals than the case where we estimate the magnitude spectrum and combine with the noisy phase. Sample code is provided in the appendix.

### 4.3 Curro Autoencoder

We present here the Curro Partitioned Autoencoder, a novel partitioned neural network architecture. Similar to [1], we exploit the latent space structure to put noise and signal energy into different latent variables. A basic overview of the network is detailed in Figure [FIG].

In the shallow case, we have an input layer, a fully connected hidden layer, and then a split in the latent space. We split the network such that half of the latent variables correspond to signal and the other half correspond to noise, and then the outputs from both network partitions are summed. For the shallow case, we use one fully connected layer followed by an output layer of the same size. The parallel networks are the same size and share the same parameters  $\mathbf{W}$  and  $\mathbf{b}$ . Unlike in [1], we constrain the problem to 50% of latent variables for signal content and 50% for noise content. While there may be drawbacks to such a restriction, the benefit here is that we do not have to choose that ratio as a hyperparameter.

More formally,

$$\hat{Y}_i[k] = \hat{X}_i[k] + \hat{N}_i[k] \quad (35)$$

where



$$\hat{X}_i[k] = \mathbf{W}^{(3)} f(\mathbf{W}^{(2)} \mathbf{z}_{i,sig} + \mathbf{b}^{(2)}) + \mathbf{b}^{(3)} \quad (36)$$

$$\hat{N}_i[k] = \mathbf{W}^{(3)} f(\mathbf{W}^{(2)} \mathbf{z}_{i,noi} + \mathbf{b}^{(2)}) + \mathbf{b}^{(3)} \quad (37)$$

and the partitioned latent space  $\mathbf{z}_i$  is given by

$$\mathbf{z}_i = f(\mathbf{W}^{(1)} f(\mathbf{W}^{(0)} \mathbf{Y}_i[k] + b^{(0)}) + b^{(1)}) \quad (38)$$

with associated partitions

$$\mathbf{z}_i = \begin{bmatrix} \mathbf{z}_{i,sig} \\ \mathbf{z}_{i,noi} \end{bmatrix} \quad (39)$$

Note that for a latent space  $\mathbf{z}$  with  $N$  dimensions, the latent partitions  $\mathbf{z}_{i,sig}$  and  $\mathbf{z}_{i,noi}$  have dimension  $N/2$ .

We train the network as in [1] with minibatches consisting of noise-only examples and signal-plus-noise examples. The way we train the network to learn the partitions uses the following loss function:

$$l(\mathbf{Y}, \hat{\mathbf{X}}) = \begin{cases} \|\mathbf{Y} - \hat{\mathbf{N}}\|^2 & \text{if } \mathbf{Y} \text{ is noise-only} \\ \|\mathbf{Y} - \hat{\mathbf{Y}}\|^2 & \text{if } \mathbf{Y} \text{ is signal-plus-noise} \end{cases} \quad (40)$$

We introduce again a soft label  $y$  indicating if the example is noise-only or signal-plus-noise. We can then rewrite our loss function as

$$l(\mathbf{Y}, \hat{\mathbf{X}}) = \text{MSE}(\mathbf{Y}, y\hat{\mathbf{X}} + \hat{\mathbf{Y}}) \quad (41)$$

$$= \|\mathbf{Y} - y\hat{\mathbf{X}} - \hat{\mathbf{Y}}\|^2 \quad (42)$$

In this case, the soft label  $y$  takes on the opposite values as in [1], i.e.  $y = 0$  for noise-only examples and  $y = 1$  for signal-plus-noise examples.

This network also has the benefit of being able to reconstruct both the noise and the signal independently. At inference time, the desired signal can be obtained by only reconstructing the top half of the network. Also, in the case of introduced distortion, a proportion of the signal half and noise half can be combined at different ratios, i.e.  $\hat{\mathbf{X}} + \alpha\hat{\mathbf{N}}$ . Depending on circumstances, this can be introduced as a learned parameter or can be tuned manually or through a grid search.

## 5 Results

We present results here for mainly shallow network architectures. At the output layer of each network, an identity nonlinearity is used. At any other layer, the modified ReLU (mReLU) is used. Unless otherwise noted, batch normalization is applied at the input layer. Each network is compared first to itself at varying noise levels (-6 dB, -3 dB, 0 dB, 3 dB, 6 dB SNR) in terms of convergence as well as the mean squared error (MSE) for inferences.

Training minibatches consist of 128 examples, each with 1024-sample FFT frames of  $\|Y[k]\|$  at a sampling rate 16 kHz. Time windows are windowed using the Hanning window, and we use 50% overlap for perfect reconstruction at inference time. The examples used are a sum of sine waves at four fixed frequencies with uniform random amplitude and phase. The frequencies are chosen to form an A4 major chord (1-3-5-8) at slightly de-tuned frequencies so as not to allow the network to learn any pattern from the immediate harmonic structure.

$$f = [441, 549, 660, 881] \quad \text{Hz} \quad (43)$$

$$x[n] = \sum_{i=0}^3 A_i \sin 2\pi f_i / f_s n + \phi_i, \quad n = 0 \dots, 1023 \quad (44)$$

$$A_i \sim U(0.25, 0.75) \quad (45)$$

$$\phi \sim U(0, 2\pi) \quad (46)$$

Applied noise is additive-white Gaussian noise (AWGN), with the variance  $\sigma^2$  selected to achieve the desired average SNR for each minibatch as in Equation 24.

$$N[n] \sim N(0, \sigma^2), \quad n = 0 \dots, 1023 \quad (47)$$

$$y[n] = x[n] + N[n] \quad (48)$$

In semi-supervised cases where we use the soft label  $y$  for noise-only versus signal-plus-noise examples, we use 25% noise-only examples per minibatch. For inference calculations, we construct a minibatch with consecutive overlapping, windowed frames.

Simulations are written in Python 2.7 using Lasagne [8], a “lightweight library to build and train neural networks in Theano.” Theano is a “Python library that allows you to define, optimize, and evaluate mathematical expressions involving multi-dimensional arrays efficiently.” [9] Theano boasts parallel GPU support, numpy support (a mathematical Python library), numerical stability, and symbolic differentiation, among other features. These libraries and frameworks allow for ease of developing deep, novel architectures and save time in doing things like calculating gradients, weight updates and back-propagation. Sample simulation code is shown in the Appendix.

Weight updates are calculated using Adam updates [10]. 2000 iterations (minibatches) are used for each simulation. Unless otherwise noted, each hidden layer uses 2000 hidden nodes.

## 5.1 Supervised Autoencoder

For the following results, we show

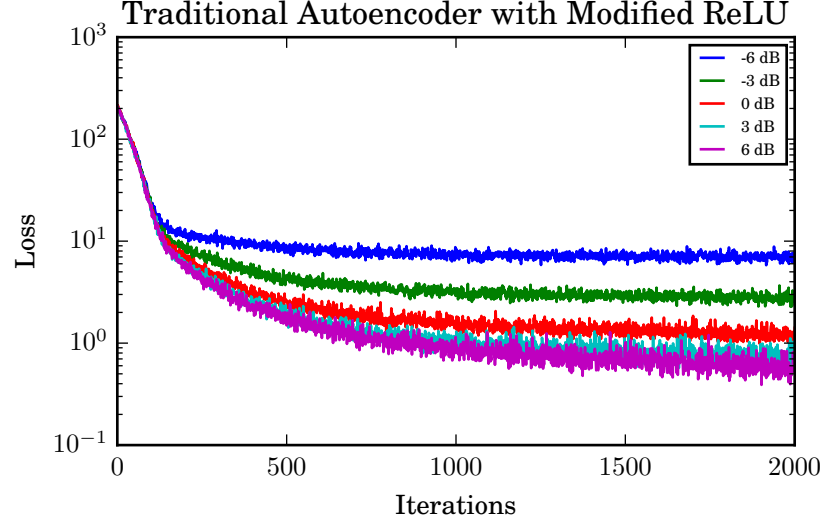


Figure 4: Loss at various SNRs for Supervised Single-Layer Autoencoder with Batch Normalization at the Input

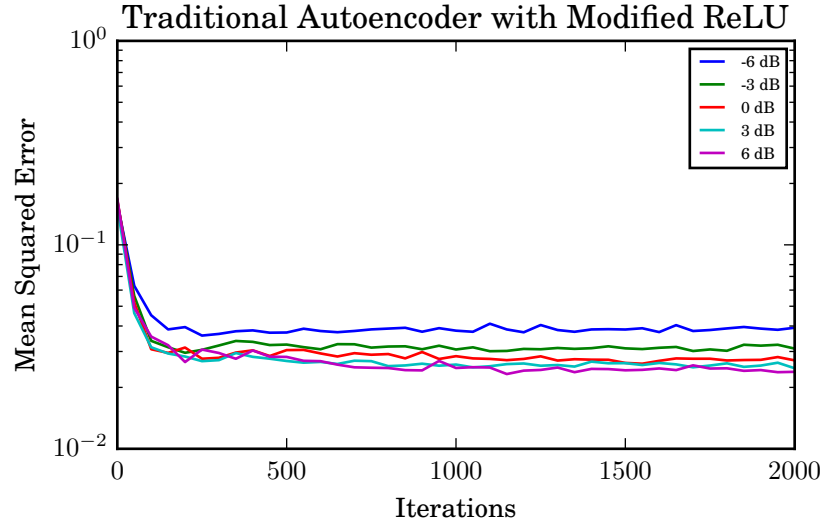


Figure 5: MSE at various SNRs for Supervised Single-Layer Autoencoder with Batch Normalization at the Input

#### 5.1.1 Batch Normalized Input

#### 5.1.2 Non-Batch Normalized Input

### 5.2 Partitioned Autoencoder

### 5.3 Partitioned Curro Autoencoder

### 5.4 Comparison of Loss Convergence

### 5.5 Comparison of Mean Squared Error Convergence

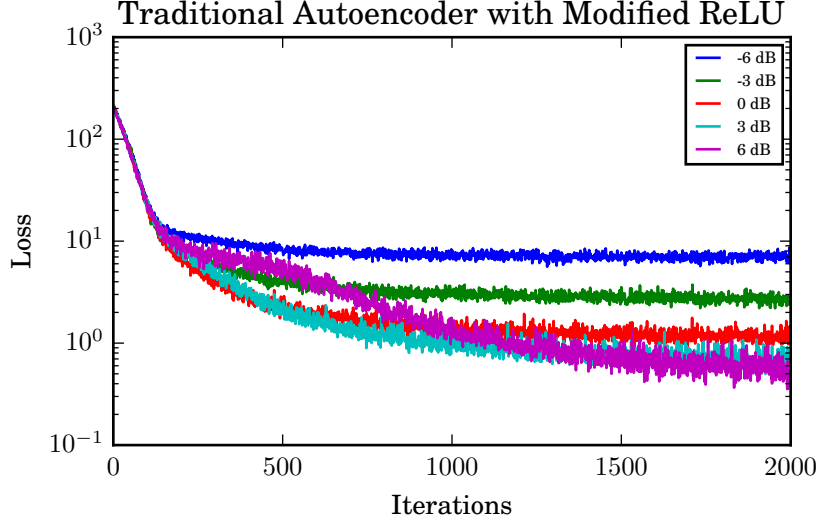


Figure 6: Loss at various SNRs for Supervised Single-Layer Autoencoder without Batch Normalization at the Input

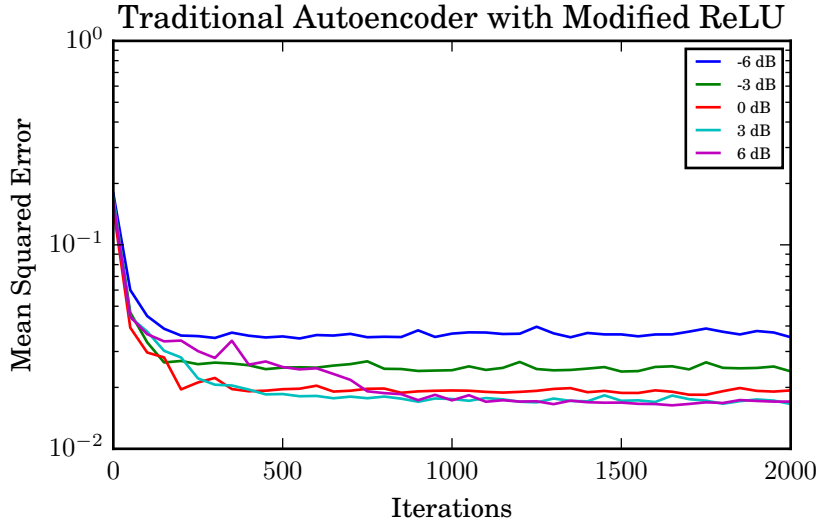


Figure 7: MSE at various SNRs for Supervised Single-Layer Autoencoder with Batch Normalization at the Input

## 6 Conclusions and Future Work

### 6.1 Conclusions

While more work is needed, deep partitioned neural network architectures using time and frequency data seem promising in long-term solutions for de-noising speech and music signals.

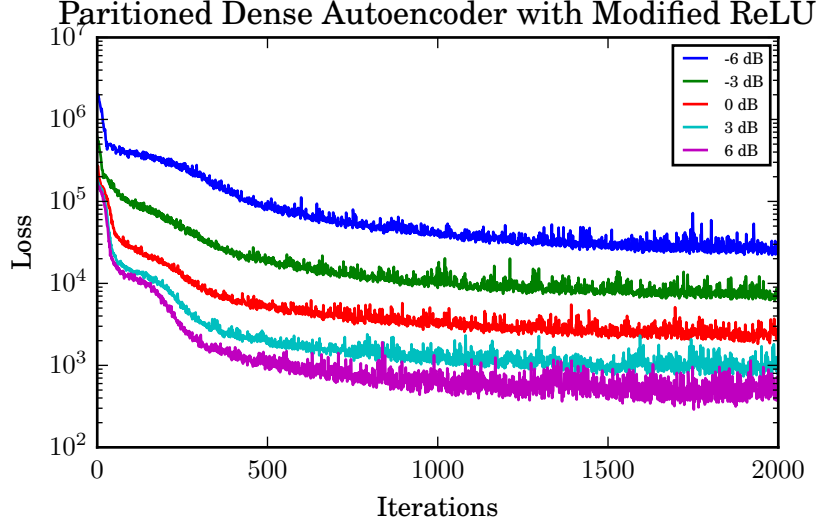


Figure 8: Loss at various SNRs for Single-Layer Partitioned Autoencoder [1]

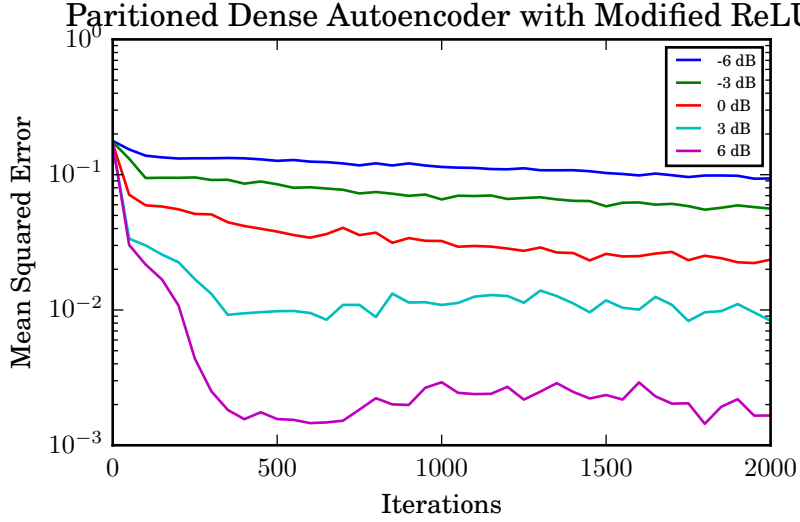


Figure 9: MSE at various SNRs for Single-Layer Partitioned Autoencoder [1]

## 6.2 Future Work

### 6.2.1 Models

Make network deeper. Consider gradual partitioning instead of hard.

Partitioned Dense Curro Autoencoder with Modified ReLU

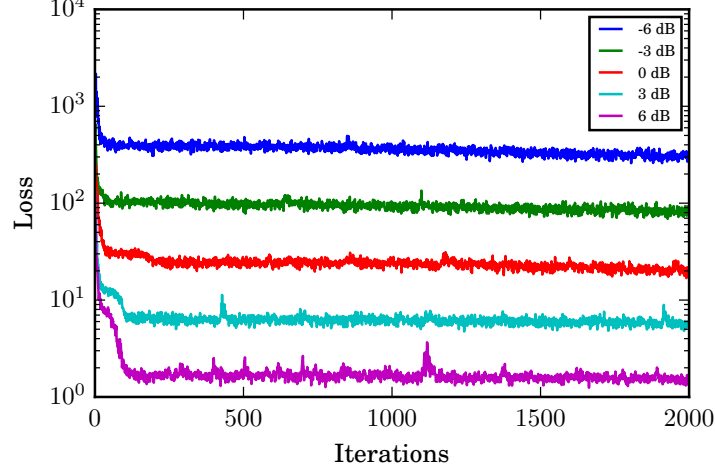


Figure 10: Loss at various SNRs for Single-Layer Curro Autoencoder

Partitioned Dense Curro Autoencoder with Modified ReLU

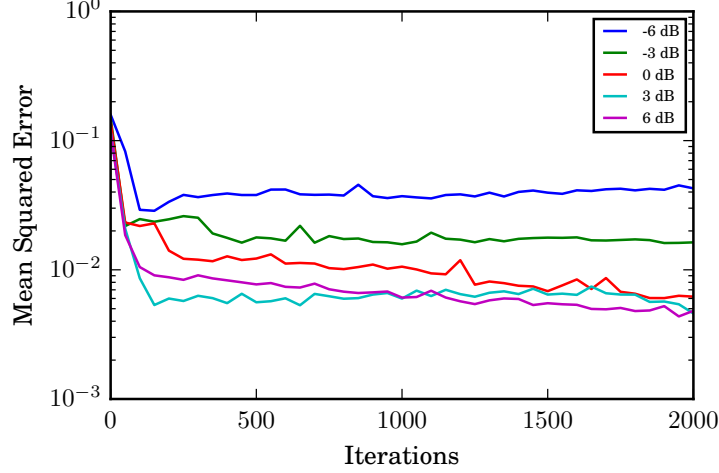


Figure 11: MSE at various SNRs for Single-Layer Curro Autoencoder

### 6.2.2 Data

Get more data. Consider different noise levels and types of signals.



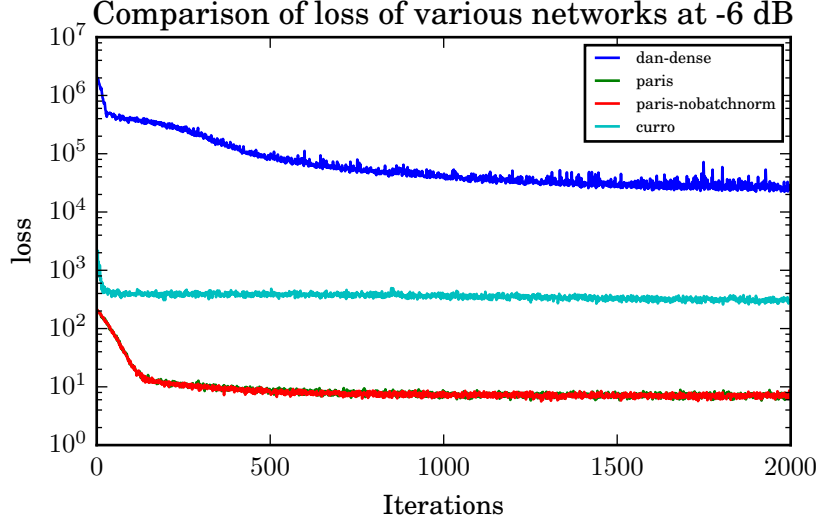


Figure 12: Loss Comparison of Various Networks at -6 dB

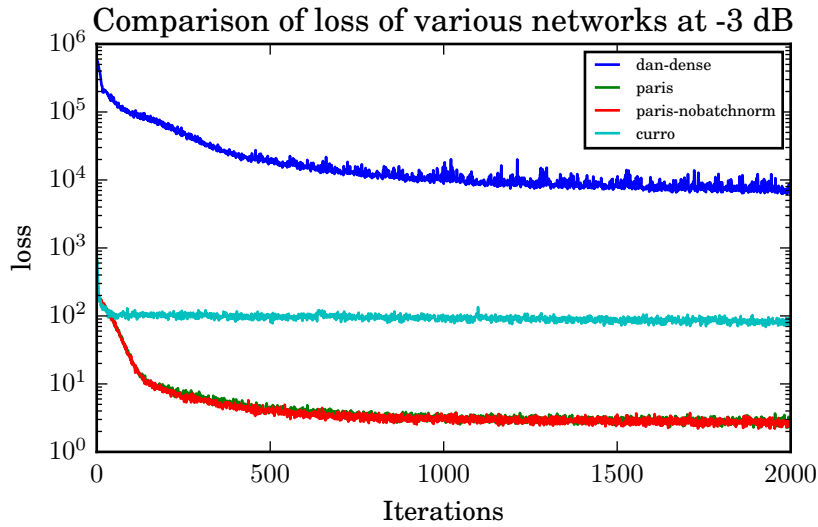


Figure 13: Loss Comparison of Various Networks at -3 dB

## References

- [1] D. Stowell and R. E. Turner, “Denoising without access to clean data using a partitioned autoencoder,” *CoRR*, vol. abs/1509.05982, 2015. [Online]. Available: <http://arxiv.org/abs/1509.05982>
- [2] D. Liu, P. Smaragdis, and M. Kim, “Experiments on deep learning for speech denoising,” in *INTERSPEECH*, 2014, pp. 2685–2689.
- [3] C. M. Bishop, *Pattern recognition and machine learning*. springer,

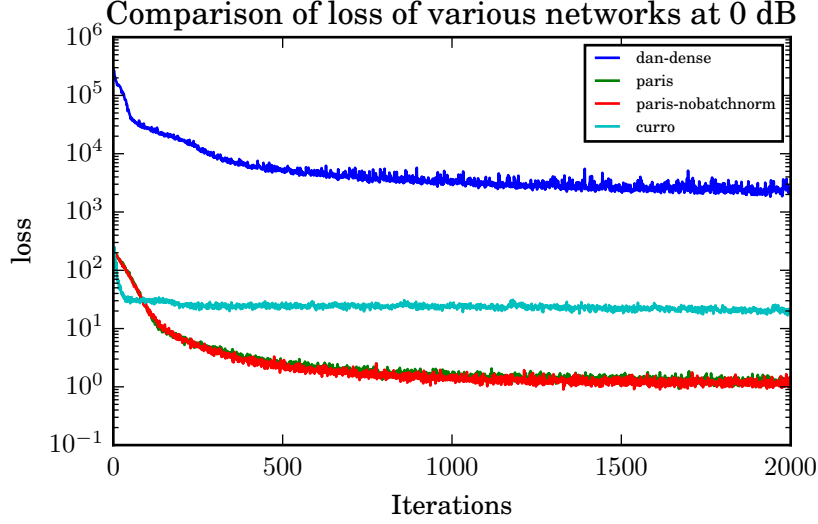


Figure 14: Loss Comparison of Various Networks at 0 dB

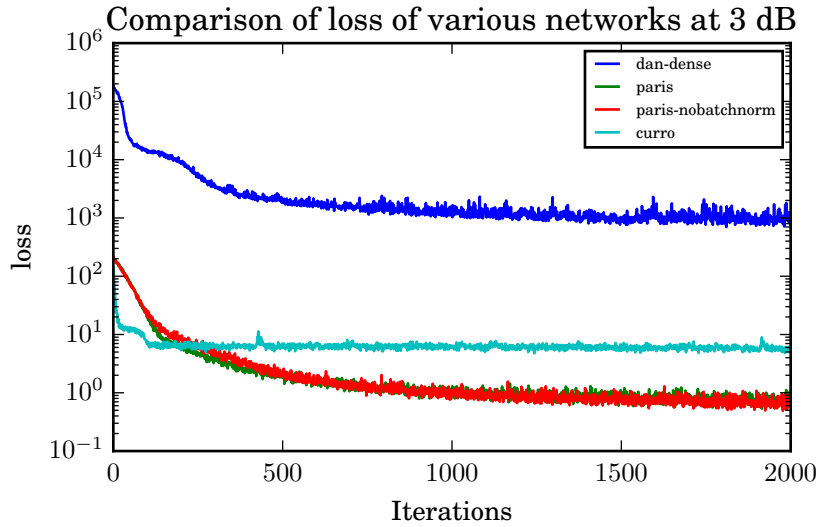


Figure 15: Loss Comparison of Various Networks at 3 dB

2006.

- [4] X. Glorot, A. Bordes, and Y. Bengio, "Deep sparse rectifier neural networks." in *Aistats*, vol. 15, no. 106, 2011, p. 275.
- [5] D. R. Wilson and T. R. Martinez, "The general inefficiency of batch training for gradient descent learning," *Neural Networks*, vol. 16, no. 10, pp. 1429–1451, 2003.
- [6] S. Ioffe and C. Szegedy, "Batch normalization: Accelerating deep network training by reducing internal covariate shift," *arXiv preprint*

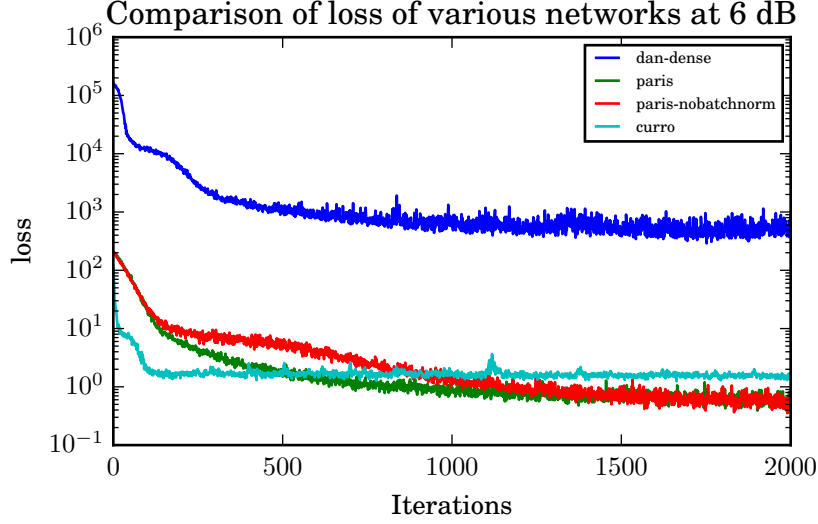


Figure 16: Loss Comparison of Various Networks at 6 dB

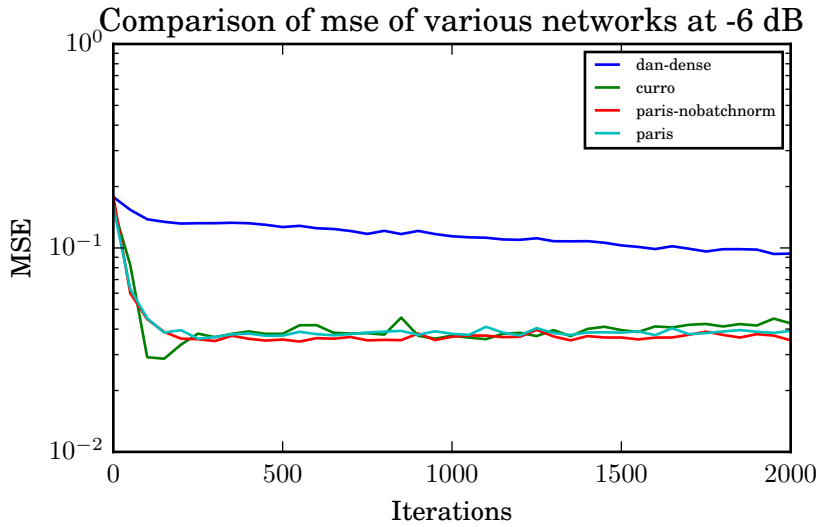


Figure 17: MSE Comparison of Networks at -6 dB

*arXiv:1502.03167*, 2015.

- [7] V. O. Alan, W. S. Ronald, and R. John, "Discrete-time signal processing," *New Jersey, Printice Hall Inc*, 1989.
- [8] S. Dieleman, J. Schlüter, C. Raffel, E. Olson, S. K. Sønderby, D. Nouri, D. Maturana, M. Thoma, E. Battenberg, J. Kelly, J. D. Fauw, M. Heilman, diogo149, B. McFee, H. Weideman, takacsg84, peterderivaz, Jon, instagibbs, D. K. Rasul, CongLiu, Britefury, and

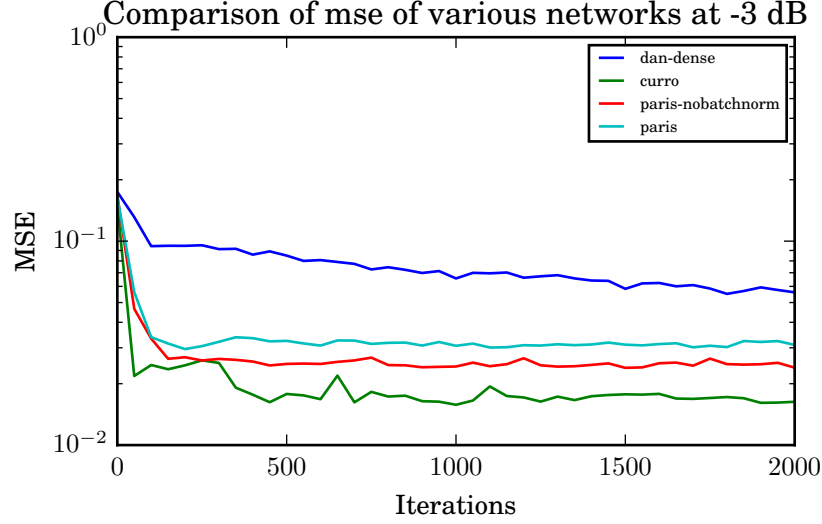


Figure 18: MSE Comparison of Networks at -3 dB

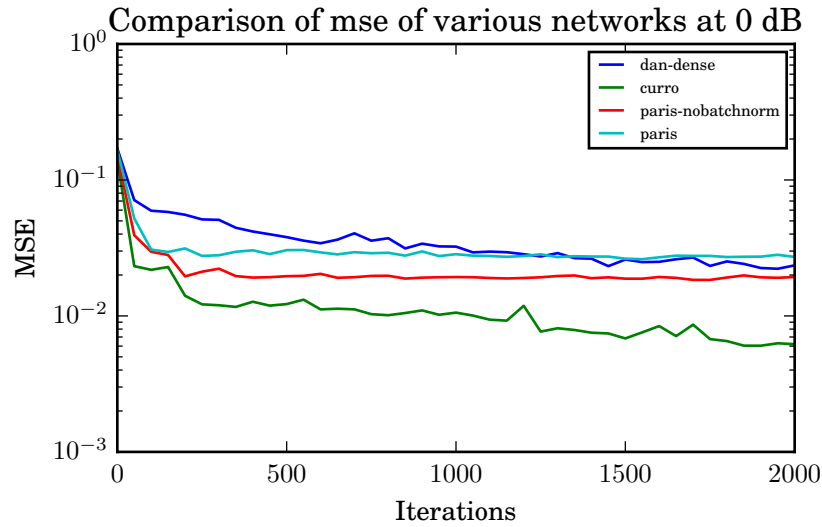


Figure 19: MSE Comparison of Networks at 0 dB

J. Degraive, “Lasagne: First release.” Aug. 2015. [Online]. Available: <http://dx.doi.org/10.5281/zenodo.27878>

- [9] Theano Development Team, “Theano: A Python framework for fast computation of mathematical expressions,” *arXiv e-prints*, vol. abs/1605.02688, May 2016. [Online]. Available: <http://arxiv.org/abs/1605.02688>

- [10] D. P. Kingma and J. Ba, “Adam: A method for stochastic optimization,” *CoRR*, vol. abs/1412.6980, 2014. [Online]. Available: <http://arxiv.org/abs/1412.6980>

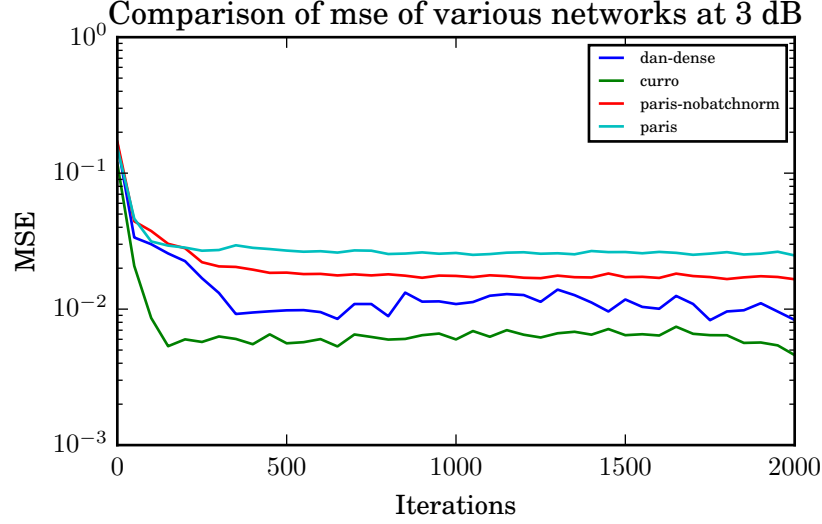


Figure 20: MSE Comparison of Networks at 3 dB

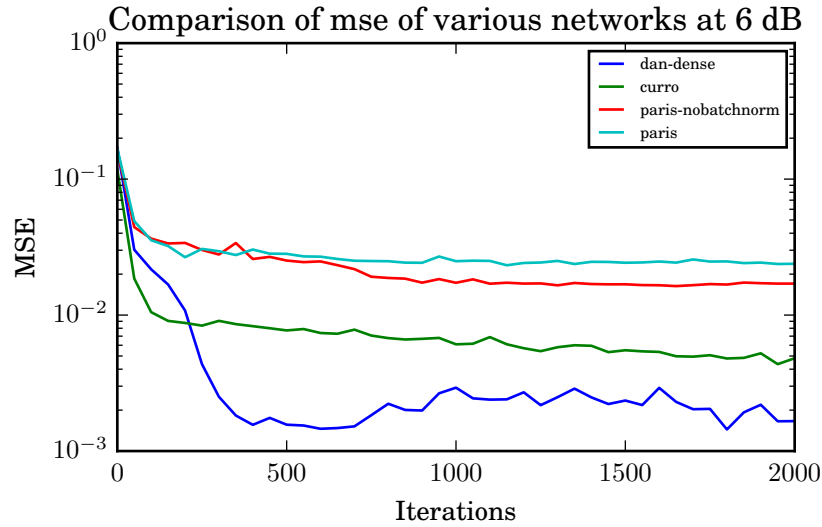


Figure 21: MSE Comparison of Networks at 6 dB

<http://arxiv.org/abs/1412.6980>

- [11] P. Baldi and Z. Lu, “Complex-valued autoencoders,” *Neural Networks*, vol. 33, pp. 136–147, 2012.
- [12] Y. Xu, J. Du, L.-R. Dai, and C.-H. Lee, “An experimental study on speech enhancement based on deep neural networks,” *IEEE Signal Processing Letters*, vol. 21, no. 1, pp. 65–68, 2014.
- [13] P. Vincent, H. Larochelle, I. Lajoie, Y. Bengio, and P.-A. Manzagol, “Stacked denoising autoencoders: Learning useful representations in a

- deep network with a local denoising criterion,” *Journal of Machine Learning Research*, vol. 11, no. Dec, pp. 3371–3408, 2010.
- [14] T. Ishii, H. Komiyama, T. Shinozaki, Y. Horiuchi, and S. Kuroiwa, “Reverberant speech recognition based on denoising autoencoder,” in *INTERSPEECH*, 2013, pp. 3512–3516.
  - [15] B. Gold, N. Morgan, and D. Ellis, “Speech and audio signal processing: processing and perception of speech and music,” 2011.
  - [16] M. Kayser and V. Zhong, “Denoising convolutional autoencoders for noisy speech recognition.”
  - [17] U. Zölzer, *Digital audio signal processing*. John Wiley & Sons, 2008.
  - [18] G. E. Hinton and R. R. Salakhutdinov, “Reducing the dimensionality of data with neural networks,” *Science*, vol. 313, no. 5786, pp. 504–507, 2006.
  - [19] A. Rad and T. Virtanen, “Phase spectrum prediction of audio signals,” in *International Symposium on Communications Control and Signal Processing (ISCCSP)*, 2012, pp. 1–5.
  - [20] P. Vincent, H. Larochelle, Y. Bengio, and P.-A. Manzagol, “Extracting and composing robust features with denoising autoencoders,” in *Proceedings of the Twenty-fifth International Conference on Machine Learning (ICML’08)*, W. W. Cohen, A. McCallum, and S. T. Roweis, Eds. ACM, 2008, pp. 1096–1103.
  - [21] W. W. Cohen, A. McCallum, and S. T. Roweis, Eds., *Proceedings of the Twenty-fifth International Conference on Machine Learning (ICML’08)*. ACM, 2008.
  - [22] (2010) Denoising autoencoders (da). [Online]. Available: <http://deeplearning.net/dA.html>
  - [23] S. Sonoda and N. Murata, “Decoding stacked denoising autoencoders,” *CoRR*, vol. abs/1605.02832, 2016. [Online]. Available: <http://arxiv.org/abs/1605.02832>

## A Simulation Code

The following code samples show how network architectures were constructed, how GPU functions were compiled, how networks were trained, and how simulation results were collected and plotted.

```
1  from __future__ import division
2  # different networks (autoencoder, conv autoencoder, recurrent)
3  # different signals (sine, recording)
4  # different noises (awgn, crowd)
5  # different domains (time, freq)
6  from numpy import complex64
7  import scipy
8  import lasagne
9  import theano
10 import theano.tensor as T
11 import numpy as np
12 from scikits.audiolab import wavwrite
13 import matplotlib.pyplot as plt
14 from sklearn.metrics import mean_squared_error
15
16 SIMULATION_SNR = 6
17 FILE_SNR = '{} dB'.format(SIMULATION_SNR)
18 FILENAME_LOSS = 'plotfinal/curro-loss.csv'
19 FILENAME_MSE = 'plotfinal/curro-mse.csv'
20 LOSSFILE = open(FILENAME_LOSS, 'a')
21 MSEFILE = open(FILENAME_MSE, 'a')
22 LINEFMT = FILE_SNR + ',{}\n'
```

```

23  # for dan net, we look at square loss & reg loss
24  LINEFMTLOSS = FILE_SNR + ', {}, {}, {} \n'
25
26
27  dtype = theano.config.floatX
28  batchsize = 128
29  srate = 16000
30  pct = 0.5  # overlap
31  fftlen = 1024
32  framelen = fftlen
33
34  # dan-specific
35  shape = (batchsize, framelen)
36  latentsize = 2000
37  background_latents_factor = 0.25
38  minibatch_noise_only_factor = 0.5  # also for curro net
39  n_noise_only_examples = int(minibatch_noise_only_factor * batchsize)
40  n_background_latents = int(background_latents_factor * latentsize)
41  lambduh = 0.75
42
43  batch_norm = lasagne.layers.batch_norm
44
45
46  def mod_relu(x):
47      eps = 1e-5
48      return T.switch(x > eps, x, -eps/(x-1-eps))
49

```



```

50
51 def normalize(x):
52     return x / max(abs(x))
53
54
55 def snr_after(x, x_hat):
56     return np.var(x)/np.var(x-x_hat)
57
58
59 class ZeroOutBackgroundLatentsLayer(lasagne.layers.Layer):
60
61     def __init__(self, incoming, **kwargs):
62         super(ZeroOutBackgroundLatentsLayer, self).__init__(incoming)
63         mask = np.ones((batchsize, latentsize))
64         mask[:, 0:n_background_latents] = 0
65         self.mask = theano.shared(mask, borrow=True)
66
67     def get_output_for(self, input_data, reconstruct=False, **kwargs):
68         if reconstruct:
69             return self.mask * input_data
70         return input_data
71
72
73 def dan_net():
74     # net
75     x = T.matrix('X') # input
76     y = T.matrix('Y') # soft label

```

```

77     network = batch_norm(lasagne.layers.InputLayer(shape, x))
78     # network = lasagne.layers.InputLayer(shape, x)
79     print network.output_shape
80     network = lasagne.layers.DenseLayer(
81         network, latentsize, nonlinearity=mod_relu)
82     print network.output_shape
83     latents = network
84     network = ZeroOutBackgroundLatentsLayer(
85         latents, background_latents_factor=background_latents_factor)
86     network = lasagne.layers.DenseLayer(
87         network, shape[1], nonlinearity=lasagne.nonlinearities.rectify)
88     print network.output_shape
89
90     # loss
91     C = np.zeros((batchsize, latentsize))
92     C[0:n_noise_only_examples, n_background_latents + 1:] = 1
93     C_mat = theano.shared(np.asarray(C, dtype=dtype), borrow=True)
94     mean_C = theano.shared(C.mean(), borrow=True)
95     prediction = lasagne.layers.get_output(network)
96     mse_term = lasagne.objectives.squared_error(
97         prediction, x).sum(axis=[1], keepdims=True)
98     scf = lambduh/mean_C
99     regularization_term = scf * y * \
100         ((C_mat * lasagne.layers.get_output(latents))
101          ** 2).sum(axis=[1], keepdims=True)
102     loss = mse_term + regularization_term
103     loss = loss.mean()

```

```

104
105     # training compilation
106     params = lasagne.layers.get_all_params(network, trainable=True)
107     updates = lasagne.updates.adam(loss, params)
108     train_fn = theano.function([x, y], loss, updates=updates)
109
110     # inference compilation
111     predict_fn = theano.function(
112         [x], lasagne.layers.get_output(network, deterministic=True, reconstruct=True)
113
114     #
115     # other objectives
116     #
117     square_term = theano.function([x], mse_term.mean())
118     regularization_term = theano.function([x, y], regularization_term.mean())
119
120     def do_stuff(network, latents, predict_fn):
121         pass
122
123     return network, latents, loss, square_term, regularization_term, train_fn, pre
124
125
126 def dan_main(params):
127     network, latents, loss, square_loss, reg_loss, train_fn, predict_fn, do_stuff
128     lmse = []
129     lsq = []
130     lreg = []

```

```

131     # inference example for simulations
132     clean, noisy, n, labels = gen_freq_data(
133         sample=True, gen_data_fn=gen_batch_half_noisy_half_noise)
134     for i in xrange(params.niter+1):
135         _clean, _noisy, _n, _labels = gen_freq_data(
136             sample=False, gen_data_fn=gen_batch_half_noisy_half_noise)
137         # swap 0 and 1 since for dan net, 0 is signal and 1 is background
138         _labels = np.expand_dims(np.abs(_labels-1).astype(dtype)[: , 1], axis=1)
139         # labels = np.abs(labels-1).astype(dtype)
140
141         loss = train_fn(_noisy[0], _labels)
142         lmse.append(loss)
143
144         loss_lsq = square_loss(_noisy[0])
145         lsq.append(loss_lsq)
146
147         loss_reg = reg_loss(_noisy[0], _labels)
148         lreg.append(loss_reg)
149         print '%d\t%.3E\t%.3E\t%.3E' % (i, loss, loss_lsq, loss_reg)
150
151         LOSSFILE.write(LINEFMTLOSS.format(loss, loss_lsq, loss_reg))
152
153     if i in range(0, params.niter+50, 50):
154         # validate mse
155         cleaned_up = predict_fn(noisy[0])
156         cleaned_up_time = normalize(ISTFT(cleaned_up, noisy[1], fftlen))
157         clean_time = normalize(ISTFT(clean[0], clean[1], fftlen))

```

```

158         noisy_time = normalize(ISTFT(noisy[0], noisy[1], fftlen))
159         baseline_mse = mean_squared_error(clean_time, noisy_time)
160         print 'baseline mse:', baseline_mse
161         mse = mean_squared_error(cleaned_up_time, clean_time)
162         print 'mse:', mse
163         MSEFILE.write(LINEFMT.format(mse))
164
165     cleaned_up = predict_fn(noisy[0])
166     print 'freq mse:', mean_squared_error(cleaned_up, clean[0])
167     cleaned_up_time = normalize(ISTFT(cleaned_up, noisy[1], fftlen))
168     cleaned_up_clean_phase = normalize(ISTFT(cleaned_up, clean[1], fftlen))
169     clean_time = normalize(ISTFT(clean[0], clean[1], fftlen))
170     noisy_time = normalize(ISTFT(noisy[0], noisy[1], fftlen))
171     print 'time mse noisy phase:', mean_squared_error(cleaned_up_time, clean_time)
172     print 'time mse clean phase:', mean_squared_error(cleaned_up_clean_phase, clean_time)
173     print 'baseline time mse noisy to clean:', mean_squared_error(noisy_time, clean_time)
174     wavwrite(clean_time, 'dan/x.wav', fs=srate, enc='pcm16')
175     wavwrite(noisy_time, 'dan/y.wav', fs=srate, enc='pcm16')
176     wavwrite(cleaned_up_time, 'dan/xhat.wav', fs=srate, enc='pcm16')
177     wavwrite(cleaned_up_clean_phase,
178             'dan/xhat_cleanphase.wav', fs=srate, enc='pcm16')
179
180     plt.figure()
181     plt.semilogy(lmse)
182     plt.semilogy(lsq)
183     plt.semilogy(lreg)
184     plt.legend(['overall loss', 'squared error loss', 'regularization loss'])

```

```

185     plt.savefig('dan/losses.svg', format='svg')
186
187
188     def paris_net(params):
189         shape = (batchsize, fftlen)
190         x = T.matrix('x') # dirty
191         s = T.matrix('s') # clean
192         #in_layer = batch_norm(lasagne.layers.InputLayer(shape, x))
193         in_layer = lasagne.layers.InputLayer(shape, x)
194         h1 = batch_norm(
195             lasagne.layers.DenseLayer(in_layer, 2000, nonlinearity=mod_relu))
196         h1 = lasagne.layers.DenseLayer(
197             h1, fftlen, nonlinearity=lasagne.nonlinearities.identity)
198
199         # loss function
200         prediction = lasagne.layers.get_output(h1)
201         loss = lasagne.objectives.squared_error(prediction, s)
202         return h1, x, s, loss.mean(), None, prediction
203
204
205     def curro_net(params):
206         # input
207         shape = (batchsize, framelen)
208         x = T.matrix('x') # dirty input
209         label = T.matrix('label') # noise OR signal/noise
210
211         nonlin = mod_relu

```

```

212
213     # network
214     # in_layer = batch_norm(lasagne.layers.InputLayer(shape, x)) # batch norm
215     # or no?
216     in_layer = lasagne.layers.InputLayer(shape, x) # batch norm or no?
217     layersizes = 1024*2
218     h1 = lasagne.layers.DenseLayer(in_layer, layersizes, nonlinearity=nonlin)
219     h2 = lasagne.layers.DenseLayer(h1, layersizes, nonlinearity=nonlin)
220     h3 = lasagne.layers.DenseLayer(h2, layersizes, nonlinearity=nonlin)
221     f = h3 # at this point, first half is signal, second half is noise
222
223     # signal split
224     f_sig = lasagne.layers.SliceLayer(
225         f, indices=slice(0, int(layersizes/2)), axis=-1)
226     print 'sig split size: ', lasagne.layers.get_output_shape(f_sig)
227     sig_d3 = lasagne.layers.DenseLayer(f_sig, framelen, nonlinearity=nonlin)
228     # save parameters for noise split
229     d3_W = sig_d3.W
230     d3_b = sig_d3.b
231     sig_d2 = lasagne.layers.DenseLayer(sig_d3, framelen, nonlinearity=nonlin)
232     d2_W = sig_d2.W
233     d2_b = sig_d2.b
234     g_sig = lasagne.layers.DenseLayer(
235         sig_d2, framelen, nonlinearity=lasagne.nonlinearities.identity)
236     gs_W = g_sig.W
237     gs_b = g_sig.b
238

```

```

239     f_noi = lasagne.layers.SliceLayer(
240         f, indices=slice(int(layersizes/2), layersizes), axis=-1)
241     print 'noisy split size: ', lasagne.layers.get_output_shape(f_noi)
242     noi_d3 = lasagne.layers.DenseLayer(
243         f_noi, framelen, W=d3_W, b=d3_b, nonlinearity=nonlin)
244     noi_d2 = lasagne.layers.DenseLayer(
245         noi_d3, framelen, W=d2_W, b=d2_b, nonlinearity=nonlin)
246     g_noi = lasagne.layers.DenseLayer(
247         noi_d2, framelen, W=gs_W, b=gs_b, nonlinearity=lasagne.nonlinearities.identity)
248
249     out_layer = lasagne.layers.ElemwiseSumLayer([g_sig, g_noi])
250
251     prediction_sig = lasagne.layers.get_output(g_sig)
252     prediction_noi = lasagne.layers.get_output(g_noi)
253     # label is 1 for signal, 0 for noise
254     prediction = label * prediction_sig + prediction_noi
255     loss = lasagne.objectives.squared_error(prediction, x)
256     loss_sig = lasagne.objectives.squared_error(prediction_sig, x)
257     loss_noi = lasagne.objectives.squared_error(prediction_noi, x)
258
259     return out_layer, g_sig, x, label, loss.mean(), g_noi, prediction, loss_sig, loss_noi
260
261
262 def autoencoder(params):
263     # network
264     shape = (batchsize, framelen)
265     x = T.matrix('x') # dirty

```



```

266     s = T.matrix('s') # clean
267     in_layer = batch_norm(lasagne.layers.InputLayer(shape, x))
268     h1 = batch_norm(lasagne.layers.DenseLayer(
269         in_layer, 400, nonlinearity=lasagne.nonlinearities.leaky_rectify))
270     h2 = batch_norm(lasagne.layers.DenseLayer(
271         h1, 330, nonlinearity=lasagne.nonlinearities.leaky_rectify))
272     h3 = batch_norm(lasagne.layers.DenseLayer(
273         h2, 300, nonlinearity=lasagne.nonlinearities.leaky_rectify))
274     h4 = batch_norm(lasagne.layers.DenseLayer(
275         h3, 270, nonlinearity=lasagne.nonlinearities.leaky_rectify))
276     bottle = h4
277     d4 = batch_norm(lasagne.layers.DenseLayer(
278         h4, 300, nonlinearity=lasagne.nonlinearities.leaky_rectify))
279     d3 = batch_norm(lasagne.layers.DenseLayer(
280         d4, 330, nonlinearity=lasagne.nonlinearities.leaky_rectify))
281     d2 = batch_norm(lasagne.layers.DenseLayer(
282         d3, 400, nonlinearity=lasagne.nonlinearities.leaky_rectify))
283     x_hat = batch_norm(lasagne.layers.DenseLayer(
284         d2, framelen, nonlinearity=lasagne.nonlinearities.identity))
285
286     # loss function
287     prediction = lasagne.layers.get_output(x_hat)
288     loss = lasagne.objectives.squared_error(prediction, s)
289     reg = 2 * (1e-5 * lasagne.regularization.regularize_network_params(x_hat, lasa
290         1e-6 * lasagne.regularization.regularize_network_params(x_hat, lasa
291     loss = loss + reg
292     return x_hat, x, s, loss.mean(), reg.mean(), prediction

```

```

293
294
295 def train(autoencoder, x, s, loss):
296     params = lasagne.layers.get_all_params(autoencoder, trainable=True)
297     updates = lasagne.updates.adam(loss, params)
298     train_fn = theano.function([x, s], loss, updates=updates)
299     return train_fn
300
301
302 def gen_data(sample=False):
303     def _sin_f(a, f, srates, n, phase):
304         return a * np.sin(2*np.pi*f/srates*n+phase)
305
306     def _noise_var(clean, snr_db):
307         # we use one noise variance per minibatch
308         avg_energy = np.sum(clean*clean)/clean.size
309         snr_lin = 10**((snr_db)/10)
310         noise_var = avg_energy / snr_lin
311         print '\tnoise variance for minibatch: ', noise_var
312         return noise_var
313
314     # f = 440
315     if sample:
316         n = np.linspace(0, batchsize * framelen - 1, batchsize * framelen)
317         phase1 = np.random.uniform(0.0, 2*np.pi)
318         phase2 = np.random.uniform(0.0, 2*np.pi)
319         phase3 = np.random.uniform(0.0, 2*np.pi)

```

```

320     phase4 = np.random.uniform(0.0, 2*np.pi)
321     amp1 = np.random.uniform(0.25, 0.75)
322     amp2 = np.random.uniform(0.25, 0.75)
323     amp3 = np.random.uniform(0.25, 0.75)
324     amp4 = np.random.uniform(0.25, 0.75)
325     else:
326         n = np.tile(np.linspace(0, framelen-1, framelen), (batchsize, 1))
327         phase1 = np.tile(
328             np.random.uniform(0.0, 2*np.pi, batchsize), (framelen, 1)).transpose()
329         phase2 = np.tile(
330             np.random.uniform(0.0, 2*np.pi, batchsize), (framelen, 1)).transpose()
331         phase3 = np.tile(
332             np.random.uniform(0.0, 2*np.pi, batchsize), (framelen, 1)).transpose()
333         phase4 = np.tile(
334             np.random.uniform(0.0, 2*np.pi, batchsize), (framelen, 1)).transpose()
335         amp1 = np.tile(
336             np.random.uniform(0.25, 0.75, batchsize), (framelen, 1)).transpose()
337         amp2 = np.tile(
338             np.random.uniform(0.25, 0.75, batchsize), (framelen, 1)).transpose()
339         amp3 = np.tile(
340             np.random.uniform(0.25, 0.75, batchsize), (framelen, 1)).transpose()
341         amp4 = np.tile(
342             np.random.uniform(0.25, 0.75, batchsize), (framelen, 1)).transpose()
343         # clean = amp * np.sin(2 * np.pi * f / srates * n + phase)
344         clean = _sin_f(amp1, 441, srates, n, phase1) + \
345             _sin_f(amp2, 549, srates, n, phase2) + \
346             _sin_f(amp3, 660, srates, n, phase3) + \

```

```

347         _sin_f(amp4, 881, srate, n, phase4)
348
349         # corrupt with gaussian noise
350         var = _noise_var(clean, SIMULATION_SNR)
351         noise = np.random.normal(0, var, clean.shape)
352         noisy = clean + noise
353
354         if sample:
355             noisy = np.array(
356                 [noisy[i:i+framelen] for i in xrange(0, len(noisy), int(pct*framelen))]
357             )
358             clean = np.array(
359                 [clean[i:i+framelen] for i in xrange(0, len(clean), int(pct*framelen))]
360             )
361             #noisy = noisy.reshape(batchsize, framelen)
362             #clean = clean.reshape(batchsize, framelen)
363
364         return clean.astype(dtype), noisy.astype(dtype), n, None
365
366     def gen_batch_half_noisy_half_noise(sample=False):
367         def _sin_f(a, f, srate, n, phase):
368             return a * np.sin(2*np.pi*f/srate*n+phase)
369
370         nop = minibatch_noise_only_factor # noise only percentage of minibatch
371         f = 440
372         if sample:
373             n = np.linspace(0, batchsize * framelen - 1, batchsize * framelen)
374             np.random.seed(3) # to get consistent samples

```

```

374     phase1 = np.random.uniform(0.0, 2*np.pi)
375     phase2 = np.random.uniform(0.0, 2*np.pi)
376     phase3 = np.random.uniform(0.0, 2*np.pi)
377     phase4 = np.random.uniform(0.0, 2*np.pi)
378     amp1 = np.random.uniform(0.25, 0.75)
379     amp2 = np.random.uniform(0.25, 0.75)
380     amp3 = np.random.uniform(0.25, 0.75)
381     amp4 = np.random.uniform(0.25, 0.75)
382     np.random.seed()
383     clean = _sin_f(amp1, 441, srates, n, phase1) + \
384             _sin_f(amp2, 549, srates, n, phase2) + \
385             _sin_f(amp3, 660, srates, n, phase3) + \
386             _sin_f(amp4, 881, srates, n, phase4)
387     else:
388         n = np.tile(np.linspace(0, framelen-1, framelen), (batchsize, 1))
389         phase1 = np.tile(
390             np.random.uniform(0.0, 2*np.pi, batchsize), (framelen, 1)).transpose()
391         phase2 = np.tile(
392             np.random.uniform(0.0, 2*np.pi, batchsize), (framelen, 1)).transpose()
393         phase3 = np.tile(
394             np.random.uniform(0.0, 2*np.pi, batchsize), (framelen, 1)).transpose()
395         phase4 = np.tile(
396             np.random.uniform(0.0, 2*np.pi, batchsize), (framelen, 1)).transpose()
397         amp1 = np.tile(
398             np.random.uniform(0.25, 0.75, batchsize), (framelen, 1)).transpose()
399         amp2 = np.tile(
400             np.random.uniform(0.25, 0.75, batchsize), (framelen, 1)).transpose()

```

```

401     amp3 = np.tile(
402         np.random.uniform(0.25, 0.75, batchsize), (framelen, 1)).transpose()
403     amp4 = np.tile(
404         np.random.uniform(0.25, 0.75, batchsize), (framelen, 1)).transpose()
405     # clean = amp * np.sin(2 * np.pi * f / srates * n + phase)
406     clean = _sin_f(amp1, 441, srates, n, phase1) + \
407         _sin_f(amp2, 549, srates, n, phase2) + \
408         _sin_f(amp3, 660, srates, n, phase3) + \
409         _sin_f(amp4, 881, srates, n, phase4)
410     clean[0:int(batchsize*nop), :] = 0
411
412     def _noise_var(clean, snr_db):
413         # we use one noise variance per minibatch
414         avg_energy = np.sum(clean*clean)/clean.size
415         snr_lin = 10**(snr_db/10)
416         noise_var = avg_energy / snr_lin
417         print '\tnoise variance for minibatch: ', noise_var
418         return noise_var
419
420     # corrupt with gaussian noise
421     # use only the signal examples do determine noise variance (in both cases)
422     if not sample:
423         noise_var = _noise_var(clean[int(batchsize*nop):, :], SIMULATION_SNR)
424     else:
425         noise_var = _noise_var(clean[int(batchsize*nop):], SIMULATION_SNR)
426     noise = np.random.normal(0, noise_var, clean.shape)
427     noisy = clean + noise

```

```

428
429     if sample:
430         noisy = np.array(
431             [noisy[i:i+framelen] for i in xrange(0, len(noisy), int(pct*framelen))]
432         clean = np.array(
433             [clean[i:i+framelen] for i in xrange(0, len(clean), int(pct*framelen))]
434
435     if not sample:
436         labels = np.ones((batchsize, 1))
437         labels[0:int(batchsize*nop)] = 0
438         # labels = np.zeros((batchsize,1))
439         # labels[0:int(batchsize*nop)]=1
440     else:
441         # assuming "noisy" example for sample, not noise example
442         labels = np.ones((batchsize, 1))
443         # labels = np.zeros((batchsize,1))
444     labels = np.tile(labels, (1, framelen))
445
446     return clean.astype(dtype), noisy.astype(dtype), n, labels.astype(dtype)
447
448
449 def stft(x, framelen, overlap=int(pct*framelen)):
450     w = scipy.hanning(framelen)
451     X = np.array([scipy.fft(w*x[i:i+framelen], freq_bins)
452                  for i in range(0, len(x)-framelen, overlap)], dtype=complex64)
453     X = np.transpose(X)
454     return np.abs(X), np.angle(X)

```

```

455
456
457 def fft(x, fftlen):
458     w = np.tile((scipy.hanning(fftlen)), (batchsize, 1))
459     X = scipy.fft(w*x, fftlen, axis=-1)
460     return np.abs(X).astype(dtype), np.angle(X).astype(dtype)
461
462
463 def gen_freq_data(sample=False, gen_data_fn=gen_data):
464     # for training, use FFTs of any frames
465     # for testing, use FFTs of frames with 25% overlap for proper
466     # reconstruction
467     clean, noisy, n, labels = gen_data_fn(sample)
468     # get FFTs
469     clean_stft = fft(clean, fftlen) # mag, phase
470     noisy_stft = fft(noisy, fftlen) # mag, phase
471     return clean_stft, noisy_stft, n, labels # (mag, phase), (mag, phase)
472
473
474 def istft(X, framelen):
475     frames_avg = int(1/pct) # 4 in this case
476     # no avg first,
477     overlap = int(pct * framelen)
478     #x = scipy.zeros(int(framelen/2*(time_bins + 1)))
479     x = scipy.zeros(int(X.shape[1]*(X.shape[0]*pct+1-pct)))
480     for n, i in enumerate(range(0, len(x)-framelen, overlap)):
481         x[i:i+framelen] += scipy.real(scipy.ifft(X[n, :]))

```



```

482     return x
483
484
485 def ISTFT(mag, phase, framelen):
486     stft = mag * np.exp(1j*phase)
487     # return np.fft.ifft(stft, framelen)
488     return istft(stft, framelen)
489
490
491 def paris_main(params):
492     a, x, s, loss, _, x_hat = paris_net({})
493     train_fn = train(a, x, s, loss)
494     lmse = []
495     predict_fn = theano.function([x], x_hat)
496
497     np.random.seed(3)
498     clean, noisy, n, _ = gen_freq_data(sample=True)
499     np.random.seed()
500
501     for i in xrange(params.niter+1):
502         _clean, _noisy, _n, _ = gen_freq_data()
503         loss = train_fn(_noisy[0], _clean[0])
504         LOSSFILE.write(LINEFMT.format(loss))
505         lmse.append(loss)
506         print i, loss
507
508         if i in range(0, params.niter+50, 50):

```

```

509         # validate mse

510
511         cleaned_up = predict_fn(noisy[0])
512         cleaned_up_time = normalize(ISTFT(cleaned_up, noisy[1], fftlen))
513         clean_time = normalize(ISTFT(clean[0], clean[1], fftlen))
514         noisy_time = normalize(ISTFT(noisy[0], noisy[1], fftlen))
515         baseline_mse = mean_squared_error(clean_time, noisy_time)
516         print 'baseline mse:', baseline_mse
517         mse = mean_squared_error(cleaned_up_time, clean_time)
518         print 'mse:', mse
519         MSEFILE.write(LINEFMT.format(mse))
520
521     clean, noisy, n, _ = gen_freq_data(sample=True)
522     cleaned_up = predict_fn(noisy[0])
523     cleaned_up_time = normalize(ISTFT(cleaned_up, noisy[1], fftlen))
524     clean_time = normalize(ISTFT(clean[0], clean[1], fftlen))
525     mse = mean_squared_error(cleaned_up_time, clean_time)
526     # print 'mse ', mse
527     wavwrite(normalize(cleaned_up_time),
528              'paris/xhat.wav', fs=srate, enc='pcm16')
529     wavwrite(normalize(clean_time), 'paris/x.wav', fs=srate, enc='pcm16')
530     noisy_time = normalize(ISTFT(noisy[0], noisy[1], fftlen))
531     wavwrite(normalize(noisy_time), 'paris/n.wav', fs=srate, enc='pcm16')
532     plt.figure()
533     plt.subplot(411)
534     # plt.plot(cleaned_up_time[0:fftlen*2])
535     # plt.plot(clean_time[0:fftlen*2])

```

```

536 plt.plot(cleaned_up_time[1000:1250])
537 plt.plot(clean_time[1000:1250])
538 plt.subplot(412)
539 plt.semilogy(lmse)
540 plt.subplot(413)
541 plt.plot(clean[0][0, :])
542 plt.subplot(414)
543 plt.plot(np.unwrap(clean[1][0, :]))
544 plt.savefig('paris/x.svg', format='svg')
545
546
547 def curro_main(params):
548     g_sig, g_sig_for_real, x, s, loss, g_noi_for_real, x_hat, loss_sig, loss_noi =
549         {}
550     train_fn = train(g_sig, x, s, loss)
551     train_sig = theano.function([x], loss_sig.mean())
552     train_noi = theano.function([x], loss_noi.mean())
553     lmse = []
554     lsig = []
555     lnoi = []
556     predict_fn = theano.function(
557         [x], lasagne.layers.get_output(g_sig_for_real, deterministic=True))
558     predict_fn_noi = theano.function(
559         [x], lasagne.layers.get_output(g_noi_for_real, deterministic=True))
560     both = theano.function(
561         [x], lasagne.layers.get_output(g_sig, deterministic=True))
562

```

```

563     np.random.seed(3)
564     clean, noisy, n, labels = gen_freq_data(
565         sample=True, gen_data_fn=gen_batch_half_noisy_half_noise)
566     np.random.seed()
567
568     for i in xrange(params.niter+1):
569         _clean, _noisy, _n, _labels = gen_freq_data(
570             sample=False, gen_data_fn=gen_batch_half_noisy_half_noise)
571         loss = train_fn(_noisy[0], _labels)
572         lmse.append(loss)
573
574         loss1 = train_sig(_noisy[0])
575         lsig.append(loss1)
576
577         loss2 = train_noi(_noisy[0])
578         lnoi.append(loss2)
579
580         print i, loss, loss1, loss2
581         LOSSFILE.write(LINEFMTLOSS.format(loss, loss1, loss2))
582
583         if i in range(0, params.niter+50, 50):
584             # validate mse
585
586             cleaned_up = predict_fn(noisy[0])
587             cleaned_up_time = normalize(ISTFT(cleaned_up, noisy[1], fftlen))
588             clean_time = normalize(ISTFT(clean[0], clean[1], fftlen))
589             noisy_time = normalize(ISTFT(noisy[0], noisy[1], fftlen))

```

```

590         baseline_mse = mean_squared_error(clean_time, noisy_time)
591         print 'baseline mse:', baseline_mse
592         mse = mean_squared_error(cleaned_up_time, clean_time)
593         print 'mse:', mse
594         MSEFILE.write(LINEFMT.format(mse))
595
596     cleaned_up = predict_fn(noisy[0])
597     noisy_reconstructed = predict_fn_noi(noisy[0])
598     both_ffts = both(noisy[0])
599
600     cleaned_up_time = normalize(ISTFT(cleaned_up, noisy[1], fftlen))
601     clean_time = normalize(ISTFT(clean[0], clean[1], fftlen))
602     noisy_reconstructed = normalize(
603         ISTFT(noisy_reconstructed, noisy[1], fftlen))
604     both_time = normalize(ISTFT(both_ffts, noisy[1], fftlen))
605
606     mse = mean_squared_error(cleaned_up_time, clean_time)
607     mse_noi = mean_squared_error(noisy_reconstructed, clean_time)
608     mse_both = mean_squared_error(both_time, clean_time)
609     # print 'baseline mse', mean_squared_error() TODO: mse
610     print 'mse ', mse
611     print 'mse of noisy half ', mse_noi
612     print 'mse of combined (both) ', mse_both
613     wavwrite(normalize(cleaned_up_time),
614              'curro/xhat.wav', fs=srate, enc='pcm16')
615     wavwrite(normalize(clean_time), 'curro/x.wav', fs=srate, enc='pcm16')
616     wavwrite(normalize(noisy_reconstructed),

```

```

617         'curro/nxhat.wav', fs=srate, enc='pcm16')
618     wavwrite(normalize(both_time), 'curro/both.wav', fs=srate, enc='pcm16')
619     plt.figure()
620     plt.subplot(511)
621     plt.plot(clean_time[0:fftlen*3])
622     plt.plot(cleaned_up_time[0:fftlen*3])
623     plt.subplot(512)
624     plt.semilogy(lmse)
625     plt.subplot(513)
626     # plt.plot(cleaned_up[0,:])
627     plt.semilogy(
628         np.abs(np.fft.fft(np.blackman(cleaned_up_time.size)*cleaned_up_time)))
629     plt.subplot(514)
630     plt.plot(np.unwrap(noisy[1][0, :]))
631     plt.subplot(515)
632     plt.plot(noisy_reconstructed[0:fftlen*3])
633     plt.savefig('curro/x.svg', format='svg')
634     plt.figure()
635     plt.plot(lsig)
636     plt.plot(lnoi)
637     plt.legend(['sig', 'noi'])
638     plt.savefig('curro/split.svg', format='svg')
639
640
641 if __name__ == "__main__":
642     import sys
643     import argparse

```

```

644     parser = argparse.ArgumentParser()
645     parser.add_argument(
646         'net', type=str, help='super, paris, dan, or curro', default='super')
647     parser.add_argument(
648         '-n', '--niter', type=int, help='number of iterations', default=2000)
649     args = parser.parse_args()
650     mapping = {
651         'super': autoencoder,
652         'paris': paris_main,
653         'dan': dan_main,
654         'curro': curro_main,
655     }
656     mapping[args.net](args)
657     LOSSFILE.close()
658     MSEFILE.close()

```