


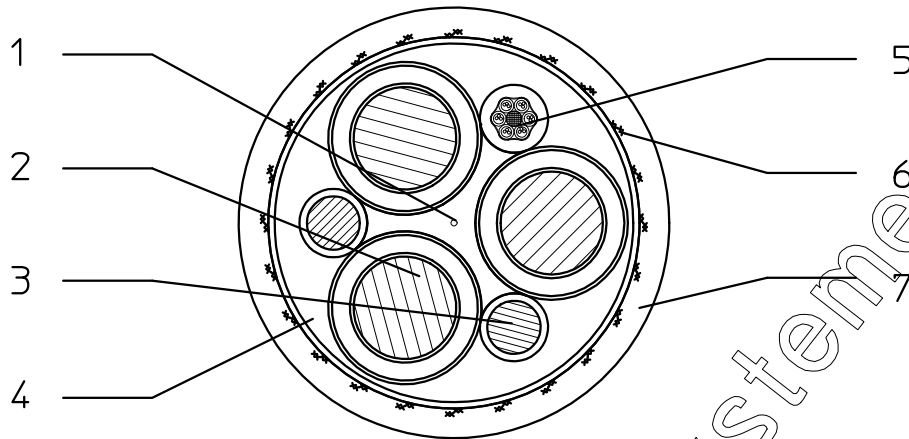

- 1) semiconductive elastomer cradle separator
- 2) 3 power cores 50mm²
 - tinned copper conductor,extra finely stranded
 - extruded semiconductive conductor-screen
 - EPR-insulation
 - extruded semiconductive insulation-screen
- 3) 2 earth conductor 25/2mm²
 - tinned copper conductor extra finely stranded
 - extruded semiconductive screen
- 4) EPR/CR - inner sheath
- 5) 1 fiber optic element (18E9/125µm)
 - central carrier
 - 6 loose buffer tubes with 3 fibers E9/125µm per each
 - rubber covering
- 6) reinforcement
 - polyester yarn braid
- 7) CR - outer sheath

cable diameter: 47,6mm (+/- 1,5mm)
 cable weight: approx. 3830 kg/km
 additional embossing: U MAX. 12,1 kV

						Maßstab		Zeichn.Nr.: 6741-E	
						5DK4 214		(20282827)	
					Datum 23.05.2025		PROTOLON(SMK)-LWL (N)TSKCGEWOEU 3x50+2x25/2+1x(18E9LWL) RED 6/10 KV Umax+		
					Name Altrichter				
					gesp.:				
					gesp.v.:				
01	Erstausgabe		23.05.2025	Altri	PRYSMIAN		Blatt		
Zust.	Mitteilung		Datum	Name					
Änderungen vorbehalten						PKS R&D CDD			