


ADDRESSABLE MANUAL CALLPOINTS

DECLENCHEURS MANUELS ADRESSABLES
 AUFRUFBARE MANUELLE FEUERMELDESTELLEN
 ADRESSEERBARE HANDMELDPUNTEN
 ADRESSERBART MANUELL LARMPUNKT
 PULSADOR MANUAL DIRECCIONABLE
 AVVISATORI DI INCENDIO MANUALI INDIRIZZABILI
 ΔΙΕΥΘΥΝΣΙΟΔΟΤΟΥΜΕΝΑ ΧΕΙΡΟΚΙΝΗΤΑ ΜΠΟΥΤΟΝ
 ΑΝΑΓΓΕΛΙΑΣ ΠΥΡΚΑΓΙΑΣ






EN54-11 Fire Alarm Device - Manual Callpoint
 EN54-17 Fire Alarm Device - Short Circuit Isolator

EN54-11 Dispositif d'alarme incendie - Déclencheurs manuels d'alarme
 EN54-17 Dispositif d'alarme incendie - isolateur de court circuit


25-9726 Iss A






SPECTRAL DM⁺ V2
 SPECTRAL DM^{EX} V2
 SPECTRAL HC MCP⁺
 SPECTRAL HC MCP^{EX}
 BF-300 V2
 BF-300 V2-H
 BF-500V2/EX

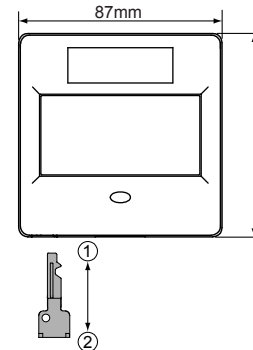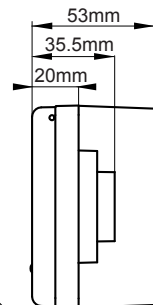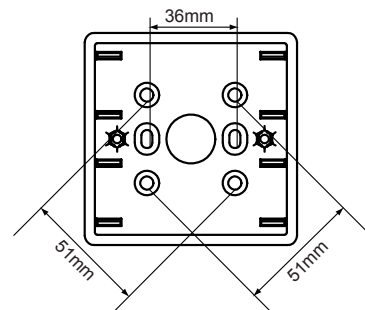


SPECTRAL DM⁺ V2
 SPECTRAL DM^{EX} V2
 SPECTRAL HC MCP⁺
 SPECTRAL HC MCP^{EX}
 BF-300 V2
 BF-300 V2-H
 BF-500V2/EX

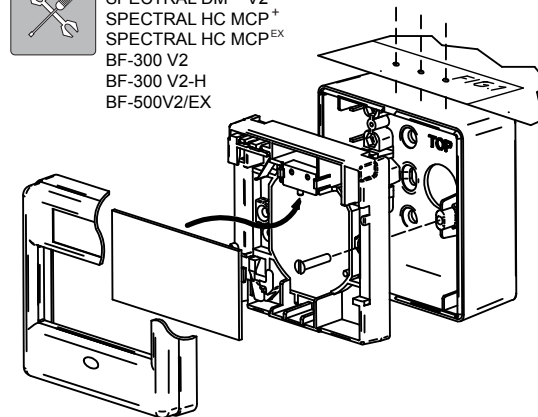


SPECTRAL DM^{WP} V2
 SPECTRAL HC MCP^{WP}
 B5-510 WP-H

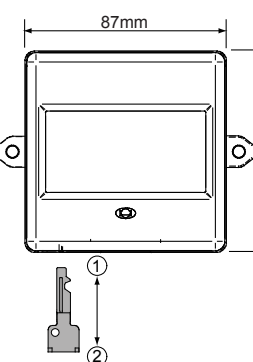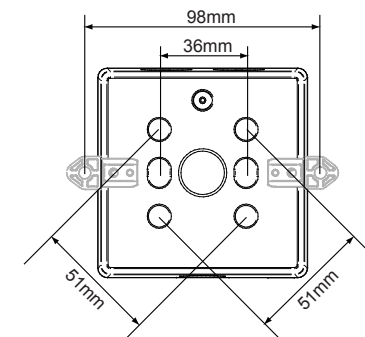


SPECTRAL DM^{WP} V2
 SPECTRAL HC MCP^{WP}
 B5-510 WP-H

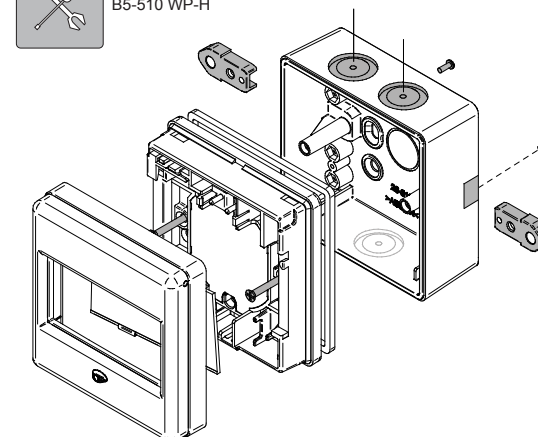

SPECTRAL DM⁺ V2 / BF-300 V2
 SPECTRAL DM^{EX} V2 / BF-500V2/EX
 SPECTRAL DM^{WP} V2 / BF-510WP-H
 SPECTRAL HC MCP / BF-300V2-H
 SPECTRAL HC MCP^{EX}
 SPECTRAL HC MCP^{WP}



SPECTRAL DM⁺ V2 / BF-300 V2
 SPECTRAL DM^{EX} V2 / BF-500V2/EX
 SPECTRAL DM^{WP} V2 / BF-510WP-H
 SPECTRAL HC MCP / BF-300V2-H
 SPECTRAL HC MCP^{EX}
 SPECTRAL HC MCP^{WP}




AUTRONICA Fire and Security
 Haakon VII's gate 4
 7483 TRONDHEIM
 Norway



www.autronicafire.com

FIG.1





0333

Autronica Fire and Security AS
Haakon VII' GT-N-7483 TRONDHEIM-NO
08

0333-CPD-####

EN54-17 - EN54-11



SPECTRAL DM⁺ V2
SPECTRAL HC MCP⁺
BF-300 V2
BF-300 V2-H

SPECTRAL DM^{EX} V2
SPECTRAL HC MCP^{EX}
BF-500V2/EX

SPECTRAL DM^{WP} V2
SPECTRAL HC MCP^{WP}
BF-510WP-H



16-26VDC

12-15.75VDC

16-26VDC



0.28mm² ~ 2.5mm²

Cable shall comply with applicable standard
Le câble doit être conforme à la réglementation



-30°C to +55°C
(95%RH)

-20°C ~ +50°C
(95%RH)

-25°C ~ +70°C
(95%RH)



ABS V0



IP42



IP42



IP66


CALLPOINT ACCESSORIES

ACCESSOIRES POUR DECLENCHEURS MANUELS
FEUERMELDESTELLENZUBEHÖR
MELDPUNT-ACCESSOIRES

TILLBEHÖR FÖR LARMPUNKTER
ACCESORIOS DE LOS PULSADORES
ACCESSORI AVVISATORI DI INCENDIO
ΠΑΡΕΛΚΟΜΕΝΑ ΜΠΟΥΤΟΝ ΑΝΑΓΓΕΛΙΑΣ

CLEAR HINGED FLAP

CAPOT DE PROTECTION TRANSPARENT
DURCHSICHTIGE Klappe MIT SCHARNIER
DOORZICHTIGE SCHARNIERENDE DEKSEL
GENOMSKINLIGT UPPFÄLLBART LOCK
TAPA LEVANTABLE TRANSPARENTE
SPORTELLINO RIBALTABILE TRASPARENTE
ΔΙΑΦΑΝΕΣ ΑΡΘΡΩΤΟ ΚΑΛΥΜΜΑ



* Not use / internal connection
non utilisé / Connexion interne

INPUT / ENTREE

OUTPUT / SORTIE

