



REPUBLIC OF SOUTH AFRICA

REPUBLIEK VAN SUID AFRIKA

PATENTS ACT, 1978

CERTIFICATE

In accordance with section 44 (1) of the Patents Act, No. 57 of 1978, it is hereby certified that:

ZHEJIANG UNIVERSITY

Has been granted a patent in respect of an invention described and claimed in complete specification deposited at the Patent Office under the number

2022/03153

A copy of the complete specification is annexed, together with the relevant Form P2.

In testimony thereof, the seal of the Patent Office has been affixed at Pretoria with effect from the **25th day of May 2022**

Registrar of Patents



REPUBLIC OF SOUTH AFRICA
PATENTS ACT, 1978
REGISTER OF PATENTS

FORM P2

Official application No.		Lodging date: Provisional		Acceptance date	
21	01 2022/03153	22		47	13 April 2022
International classification		Lodging date: National phase		Granted date	
51	B30B; B02C; B08B; G01N	23	16 March 2022		25 May 2022
International application no		International filling date		Priority date	
51	PCT/CN2021/074639	23	1 February 2021		25 August 2020
71	Full name(s) of applicant(s)/Patentee(s): ZHEJIANG UNIVERSITY				
71	Applicant(s) substituted:			Date registrered	
71	Assignee(s):			Date registrered	
72	Full name(s) of inventor(s): (1) LIU, Fei; (2) LU, Xiangyu; (3) PAN, Tiantian; (4) ZHOU, Jun; (5) SHEN, Jiangang; (6) KONG, Wenwen; (7) LI, Xiaolong				
Priority claimed:		Country	Number	Date	
		CN	202010862936.0	25 August 2020	
54	Title of invention AUTOMATIC WHOLE-PROCESS SOIL TABLETTING DEVICE				
Address of applicant(s)/patentee(s): 866 Yuhangtang Road, Xihu District, Hangzhou, Zhejiang, 310058, China					
74	Address for service Sibanda and Zantwijk, Oaktree Corner, 9 Kruger Street, Oaklands (PO Box 1615 Houghton 2041), Johannesburg, 2192, SOUTH AFRICA Reference no.: PT_NP_ZA00002569 ([InsID:])				
61	Patent of addition No.			Date of any change	
Fresh application based on.			Date of any change		

(12) 按照专利合作条约所公布的国际申请

(19) 世界知识产权组织
国际局

(43) 国际公布日
2022 年 3 月 3 日 (03.03.2022)



(10) 国际公布号
WO 2022/041655 A1

(51) 国际专利分类号:

B30B 11/04 (2006.01) **B08B 3/10** (2006.01)

B02C 18/08 (2006.01) **G01N 1/28** (2006.01)

B02C 23/08 (2006.01)

(21) 国际申请号: PCT/CN2021/074639

(22) 国际申请日: 2021 年 2 月 1 日 (01.02.2021)

(25) 申请语言: 中文

(26) 公布语言: 中文

(30) 优先权:

202010862936.0 2020 年 8 月 25 日 (25.08.2020) CN

(71) 申请人: 浙江大学(ZHEJIANG UNIVERSITY) [CN/CN]; 中国浙江省杭州市西湖区余杭塘路 866 号, Zhejiang 310013 (CN)。

(72) 发明人: 刘飞(LIU, Fei); 中国浙江省杭州市西湖区余杭塘路 866 号, Zhejiang 310013 (CN)。 陆祥宇(LU, Xiangyu); 中国浙江省杭州市西湖区余杭塘路 866 号, Zhejiang 310013 (CN)。 潘

恬恬(PAN, Tiantian); 中国浙江省杭州市西湖区余杭塘路 866 号, Zhejiang 310013 (CN)。 周军(ZHOU, Jun); 中国浙江省杭州市西湖区余杭塘路 866 号, Zhejiang 310013 (CN)。 沈坚钢(SHEN, Jiangang); 中国浙江省杭州市西湖区余杭塘路 866 号, Zhejiang 310013 (CN)。 孔汶汶(KONG, Wenwen); 中国浙江省杭州市西湖区余杭塘路 866 号, Zhejiang 310013 (CN)。 李小龙(LI, Xiaolong); 中国浙江省杭州市西湖区余杭塘路 866 号, Zhejiang 310013 (CN)。

(74) 代理人: 北京高沃律师事务所(BEIJING GAOWO LAW FIRM); 中国北京市海淀区彩和坊路 11 号 6 层 602 室, Beijing 100080 (CN)。

(81) 指定国(除另有指明, 要求每一种可提供的国家保护): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, IT, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK,

(54) Title: AUTOMATIC WHOLE-PROCESS SOIL TABLETTING DEVICE

(54) 发明名称: 一种全过程土壤自动压片装置

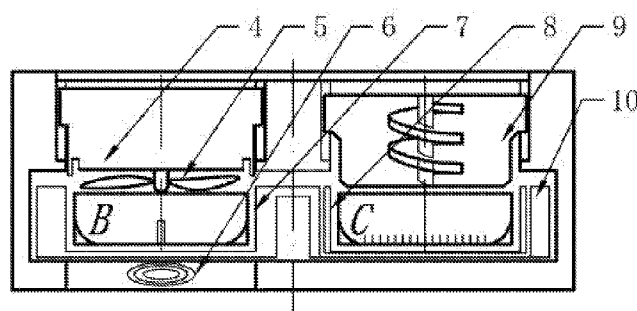


图 1

(57) Abstract: An automatic whole-process soil tableting device, relating to the technical field of soil tableting. The automatic soil tableting device comprises a device body, wherein a tableting platform is arranged at the bottom of the device body, and a first station (B), a second station (C) and a third station (A) are arranged on the tableting platform; a heating device (6) is arranged on the first station; a top plate is arranged at the top of the device body, and a soil crushing cutter (5) and a pressing head (9) are mounted on the top plate, the soil crushing cutter and the pressing head being respectively correspondingly arranged above the first station and the second station; and a groove disk (10) is further rotatably mounted on the tableting platform, and a sample preparation groove (7) and a cleaning groove (8) are provided in the groove disk, the sample preparation groove and the cleaning groove corresponding to the first station, the second station or the third station in terms of position, and the sample preparation groove and the cleaning groove being respectively used for having a soil sample container and a cleaning container placed therein. The device solves the problem of a soil sample preparation process being complex and tedious, and structures required by various processes are integrated together, such that thermal drying, powdering and pressing are automatically completed.

I, [Kaila LIU], confirm that the English translation of [PCT APP. NO.: PCT/CN2021/074639] is true and correct.

Kaila LIU
Signature

Beijing, China

March 15, 2022

AUTOMATIC WHOLE-PROCESS SOIL TABLETTING DEVICE

TECHNICAL FIELD

[01] The present disclosure relates to the field of soil tableting technologies, in particular to a whole-process automatic soil tableting machine.

BACKGROUND ART

[02] Tableting of soil is a sample form and a sample preparation method which are usually needed in experiments for evaluating soil fertility and detecting soil heavy metal pollution. In order to obtain good experimental results, a plurality of groups of tableting samples need to be prepared, and a plurality of tableting samples need to be prepared in each group repeatedly. The total number of samples to be prepared is therefore very large. However, steps of screening, grinding, drying, and tableting, which are conducted manually step by step, are most common in the soil tableting preparation mode at present, and thus a large amount of manpower is spent under the condition that the number of samples to be prepared is large.

[03] Therefore, there is an urgent need for a whole-process automatic soil tableting machine to solve the problem existing in the prior art.

SUMMARY

[04] The present disclosure aims to provide a whole-process automatic soil tableting machine to solve a problem that the preparation process of the soil sample is complex and tedious, and to integrate structures required by all processes together to realize the automatic completion of thermal drying, powdering and compacting.

[05] In order to achieve the purpose, the present disclosure provides the following scheme: a whole-process automatic soil tableting machine provided by the present disclosure includes a device body. A tableting platform is arranged at a bottom of the device body. A first station, a second station and a third station are arranged on the tableting platform, and a heating device is arranged on the first station. A top plate is arranged at a top of the device body, a soil crushing cutter and a punch head are installed on the top plate, and the soil crushing cutter and the punch head are arranged above the first station and the second station respectively. The tableting platform is further installed with a groove disc, sample preparation grooves and a cleaning groove are formed in the groove disc. The sample preparation grooves and the cleaning groove correspond to the first station, the second station or the third station, and the cleaning groove and each of the sample preparation grooves are configured for placing a cleaning container and a soil sample container, respectively.

[06] In some embodiments, an inner part of the soil sample container is bowl-shaped, and the soil sample container is made of an iron material. First outer supporting plates are arranged at respective bottoms of outer walls of the soil sample container and configured for enabling the soil sample container to be stably fixed in a corresponding one of the sample preparation grooves.

[07] In some embodiments, the cleaning groove may be arranged on the groove

disc, an inner part of the cleaning container may be bowl-shaped. Second outer supporting plates may be arranged at respective bottoms of outer walls of the cleaning container, and the cleaning container may be fixed in the cleaning groove and may rotate along with the cleaning groove. And an inner bottom of the cleaning container may be further distributed with a brush.

[08] In some embodiments, the heating device may be an electromagnetic heater.

[09] In some embodiments, the top plate may be provided with a soil crushing cutter rest, the soil crushing cutter rest may be located above the first station. The top plate may be provided with a slide track, a top of the soil crushing cutter rest may be connected with a first lifting device, which may drive the soil crushing cutter rest to move up and down along the slide track. A sealing groove may be formed in a periphery of a bottom of the soil crushing cutter rest and configured for being tightly attached to an edge of the soil sample container to form closed space. And the soil crushing cutter may be installed on the soil crushing cutter rest.

[10] In some embodiments, a top of the punch head may be connected with a second lifting device, which may drive the punch head to move up and down along the slide track on the top plate, a size of a lower portion of the punch head may be smaller than an inner diameter of the soil sample container, and the punch head may be configured for extending into the soil sample container to compact soil.

[11] In some embodiments, the first lifting device and the second lifting device may be telescopic rods or rotary screw rods.

[12] In some embodiments, the whole-process automatic soil tableting machine further may includes a screen, where the screen may be configured for covering the soil sample container to screen sundries in a soil sample.

[13] In some embodiments, the first station, the second station and the third station may be uniformly distributed in a triangle at an interval of 120 degrees. The sample preparation grooves may include two sample preparation grooves, and the cleaning groove and the two sample preparation grooves may be uniformly distributed in the triangle at the interval of 120 degrees. And an arc-shaped notch may be formed in the top plate of the device body and located above the third station.

[14] In some embodiments, the whole-process automatic soil tableting machine may be configured for tableting easily-pulverized samples.

[15] Compared with the prior art, the present disclosure has the following beneficial technical effects.

[16] The problem that the preparation process of the soil sample is complex and tedious can be solved. Compared with a traditional mode that tableting of soil is performed manufacturing, manual grinding and tableting step by step, the device integrates structures required by all processes together, and the automatic completion of thermal drying, powdering and compacting is realized. The device is provided with the soil sample containers each of which is arranged with one soil sample, and the device can be self-cleaned, so that cross contamination among different batches of the soil samples can be avoided. The device is compact in overall design structure, relatively small in size and convenient to move and carry. In addition, the use scenes are diversified. Besides tableting of the soil sample, the preparation of tableting of the

easily-pulverized sample, such as flour and dry organic fertilizer, can be achieved.

BRIEF DESCRIPTION OF THE DRAWINGS

[17] To more clearly illustrate the embodiment of the present disclosure or the technical scheme in the prior art, the following briefly introduces the attached figures to be used in the embodiment. Apparently, the attached figures in the following description show merely some embodiments of the present disclosure, and those skilled in the art may still derive other drawings from these attached figures without creative efforts.

[18] FIG. 1 is a structural schematic diagram of a whole-process automatic soil tableting machine according to the present disclosure;

[19] FIG. 2 is a top view of the whole-process automatic soil tableting machine according to the present disclosure;

[20] FIG. 3 is a top view of a soil sample container according to the present disclosure;

[21] FIG. 4 is a schematic diagram of the soil sample container and a screen according to the present disclosure; and

[22] FIG. 5 is a structural schematic diagram of a cleaning container according to the present disclosure.

[23] List of reference characters: 1 screen; 2 soil sample container; 2-1 first outer supporting plate; 3 cleaning container; 3-1 brush, 3-2 second outer supporting plate; 4 soil crushing cutter rest; 5 soil crushing cutter; 6 heating device; 7 sample preparation groove; 8 cleaning groove; 9 punch head; 10 groove disc; 11 top plate; 12-B first lifting device, 12-C second lifting device; A third station; B first station; and C second station.

DETAILED DESCRIPTION OF THE EMBODIMENTS

[24] The following clearly and completely describes the technical scheme in the embodiments of the present disclosure with reference to the attached figures in the embodiments of the present disclosure. Apparently, the described embodiments are merely a part rather than all of the embodiments of the present disclosure. All other embodiments obtained by those skilled in the art based on the embodiments of the present disclosure without creative efforts shall fall within the protection scope of the present disclosure.

[25] To make the foregoing objective, features and advantages of the present disclosure clearer and more comprehensible, the present disclosure is further described in detail below with reference to the attached figures and specific embodiments.

[26] As shown in FIG. 1 to FIG. 5, the embodiment provides a whole-process automatic soil tableting machine. The whole-process automatic soil tableting machine includes a device body. A tableting platform is arranged at a bottom of the device body, a first station B, a second station C and a third station A are arranged on the tableting platform, and a heating device 6 is arranged on the first station B. A top plate is arranged at a top of the device body, a soil crushing cutter 5 and a punch head 9 are installed on the top plate, and the soil crushing cutter 5 and the punch head 9 are arranged above the first station B and the second station C respectively. A groove disc 10 is further installed on the tableting platform. Specifically, a middle part of the

tableting platform is provided with a center shaft, and a bottom of the groove disc 10 is installed on the center shaft. Sample preparation grooves 7 and a cleaning groove 8 are formed in the groove disc 10. The sample preparation grooves 7 and the cleaning groove 8 correspond to positions of the first station B, the second station C or the third station A, and the cleaning groove 8 and each of the sample preparation grooves 7 are configured for placing a cleaning container 3 and a soil sample container 2, respectively.

[27] In the embodiments, an inner part of the soil sample container 2 is bowl-shaped, and the soil sample container is made of an iron material. First outer supporting plates 2-1 are arranged at respective bottoms of outer walls of the soil sample container, so that the soil sample container can be stably fixed in the sample preparation grooves 7. The screen 1 is of an independent structure matched with the soil sample container 2 and can tightly cover the soil sample container 2 to be used for screening sundries in a soil sample.

[28] In the embodiments, the cleaning container 3 and the soil sample container 2 are the same in size and similar in appearance. The cleaning container 3 can be fixed in the cleaning groove 8 and rotate along with the cleaning groove 8. A brush 3-1 is further distributed at a bottom in the cleaning container. The cleaning groove 8 can rotate itself, so as to drive the cleaning container 3 and the brush to clean the soil crushing cutter 5 and the punch head 9. Specifically, a bottom of the cleaning groove 8 is installed on the groove disc through a rotating shaft, and the cleaning groove 8 can be driven to rotate through a driving device such as a motor.

[29] In the embodiments, the soil crushing cutter rest 4 is located at the first station B at an upper portion of the tableting platform and can move up and down along a slide track on the top plate. A sealing groove is formed in a periphery of a bottom of the soil crushing cutter rest 4 and can be tightly attached to an edge of the soil sample container 2 to form a closed space when the soil crushing cutter rest 4 falls down. The soil crushing cutter 5 is installed on a bottom portion of the soil crushing cutter rest 4 and can rotate at a high speed when the soil sample container is closed. A motor can be arranged on the soil crushing cutter rest and configured for driving the soil crushing cutter 5 to rotate.

[30] In the embodiments, the heating device 6 is located in the first station B at a bottom of the tableting platform. The heating mode of the heating device 6 is electromagnetic heating, and the soil sample can be indirectly heated and dried by heating the iron soil sample container 4.

[31] In the embodiments, the punch head 9 is located above the second station C of the tableting platform and can move up and down along the slide track. Pressing power of the punch head comes from a rotary screw rod arranged in the punch head. A size of a lower portion of the punch head is smaller than an inner diameter of the soil sample container, and the punch head can extend into the soil sample container to compact the soil.

[32] In the embodiments, the two sample preparation grooves 7 are formed. The two sample preparation grooves 7 and the cleaning groove 8 are all located in the groove disc 10 and evenly distributed at an interval of 120 degrees. A distribution mode of the two sample preparation grooves 7 and the cleaning groove 8 is the same as the

distribution mode of the stations. The groove disc 10 can horizontally rotate around the center shaft of the tableting platform, and the alternation of all procedures is achieved.

[33] Further, the soil sample is only one use scene of the embodiment, and the embodiment can also be used for tableting preparation of easily-pulverized samples such as flour and dry organic fertilizer.

[34] The automatic tableting preparation process in the embodiment includes the following steps.

[35] Firstly, each soil sample container 2 is filled with the soil sample through the screen 1, and the soil sample containers 2 are placed in the respective sample preparation grooves 7 at the third station A of the groove disc 10.

[36] Secondly, the groove disc 10 rotates to the first station B, and the soil crushing cutter rest 4 descends to seal the soil sample containers 2.

[37] Thirdly, the soil sample containers 2 are electromagnetically heated by the heating device 6 below the sample preparation grooves 7, and the soil crushing cutter 5 rotates at a high speed to blow and stir the soil sample.

[38] Fourthly, the soil crushing cutter rest 4 is raised, the groove disc 10 rotates to the second station C, and the soil sample in the soil sample container 2 is compacted by the punch head 9.

[39] Fifthly, the punch head 9 is raised, the groove disc 10 is reset to the third station A, and a soil tableting process is completed.

[40] The self-cleaning process in the embodiment includes the following steps.

[41] Firstly, cleaning solution is placed in the cleaning container 3, and the cleaning container 3 is putted in the cleaning groove 8 at the third station A.

[42] Secondly, the groove disc 10 rotates to the first station B, and the soil crushing cutter rest 4 descends to seal the cleaning container 3.

[43] Thirdly, the soil crushing cutter 5 rotates clockwise and anticlockwise at a low speed, and the residual soil powder on parts of the crushing cutter rest 4 is taken away by the cleaning solution.

[44] Fourthly, the groove disc 10 rotates to the second station C, the pressing head 9 descends, the cleaning container 3 is driven to rotate by the cleaning groove 8, and residues at a bottom of the punch head 9 are wiped away by short bristles of the brush at the bottom of the cleaning container 3.

[45] Fifthly, the punch head 9 is raised, the groove disc 10 is reset to the third station A, and the self-cleaning process of the device is completed.

[46] It needs to be noted that for those skilled in the art, apparently the present disclosure is not limited to the details of the exemplary embodiment, and the present disclosure can be achieved in other specific forms without departing from the spirit or essential characteristics of the present disclosure. Therefore, for every point, the embodiments should be regarded as exemplary embodiments and are unrestrictive, the scope of the present disclosure is restricted by the claims appended hereto, therefore, all changes, including the meanings and scopes of equivalent elements, of the claims are aimed to be included in the present disclosure, and any mark of attached figures in the claims should not be regarded as limitation to the involved claims.

[47] Specific examples are used for illustration of the principles and

implementation methods of the present disclosure. The description of the above-mentioned embodiments is used to help illustrate the method and its core principles of the present disclosure. In addition, those skilled in the art can make various modifications in terms of specific embodiments and scope of application in accordance with the teachings of the present disclosure. In conclusion, the content of this specification shall not be construed as a limitation to the present disclosure.

WHAT IS CLAIMED IS:

1. A whole-process automatic soil tableting machine, the tableting machine comprising a device body, wherein a tableting platform is arranged at a bottom of the device body, a first station, a second station and a third station are arranged on the tableting platform, and a heating device is arranged on the first station; a top plate is arranged at a top of the device body, a soil crushing cutter and a punch head are installed on the top plate, and the soil crushing cutter and the punch head are arranged above the first station and the second station respectively; the tableting platform is further installed with a groove disc, sample preparation grooves and a cleaning groove are formed in the groove disc, the sample preparation grooves and the cleaning groove correspond to the first station, the second station or the third station; and the cleaning groove and each of the sample preparation grooves are configured for placing a cleaning container and a soil sample container, respectively.

2. The whole-process automatic soil tableting machine according to claim 1, wherein an inner part of the soil sample container is bowl-shaped, and the soil sample container is made of an iron material; first outer supporting plates are arranged at respective bottoms of outer walls of the soil sample container and configured for enabling the soil sample container to be stably fixed in a corresponding one of the sample preparation grooves.

3. The whole-process automatic soil tableting machine according to claim 1, wherein the cleaning groove is arranged on the groove disc, an inner part of the cleaning container is bowl-shaped, second outer supporting plates are arranged at respective bottoms of outer walls of the cleaning container, and the cleaning container is fixed in the cleaning groove and rotates along with the cleaning groove; and an inner bottom of the cleaning container is further distributed with a brush.

4. The whole-process automatic soil tableting machine according to claim 1, wherein the heating device is an electromagnetic heater.

5. The whole-process automatic soil tableting machine according to claim 1, wherein the top plate is provided with a soil crushing cutter rest, the soil crushing cutter rest is located above the first station, the top plate is provided with a slide track, a top of the soil crushing cutter rest is connected with a first lifting device, which drives the soil crushing cutter rest to move up and down along the slide track; a sealing groove is formed in a periphery of a bottom of the soil crushing cutter rest and configured for being tightly attached to an edge of the soil sample container to form closed space; and the soil crushing cutter is installed on the soil crushing cutter rest.

6. The whole-process automatic soil tableting machine according to claim 1, wherein a top of the punch head is connected with a second lifting device, which drives the punch head to move up and down along the slide track on the top plate, a size of a lower portion of the punch head is smaller than an inner diameter of the soil sample container, and the punch head is configured for extending into the soil sample container to compact soil.

7. The whole-process automatic soil tableting machine according to claim 5 or 6, wherein the first lifting device and the second lifting device are telescopic rods or rotary

screw rods.

8. The whole-process automatic soil tableting machine according to claim 1, the tableting machine further comprising a screen, wherein the screen is configured for covering the soil sample container to screen sundries in a soil sample.

9. The whole-process automatic soil tableting machine according to claim 1, wherein the first station, the second station and the third station are uniformly distributed in a triangle at an interval of 120 degrees, the sample preparation grooves comprise two sample preparation grooves, and the cleaning groove and the two sample preparation grooves are uniformly distributed in the triangle at the interval of 120 degrees; and an arc-shaped notch is formed in the top plate of the device body and located above the third station.

10. The whole-process automatic soil tableting machine according to claim 1, wherein the whole-process automatic soil tableting machine is configured for tableting easily-pulverized samples.

ABSTRACT OF THE DISCLOSURE

An automatic whole-process soil tabletting device is provided and includes a device body. A tabletting platform is arranged at the bottom of the device body. A first station on which a heating device is arranged, second and third stations are arranged on the tabletting platform. A top plate is arranged at the top of the device body, a soil crushing cutter and a pressing head are mounted on the top plate. The soil crushing cutter and the pressing head are respectively correspondingly arranged above the first station and the second station. The tabletting platform is installed with a groove disc where sample preparation grooves and a cleaning groove are formed. The sample preparation groove and the cleaning groove correspond to the first station, the second station or the third station. The cleaning groove and each sample preparation groove are for placing a cleaning container and a soil sample container, respectively.

ABSTRACT DRAWING

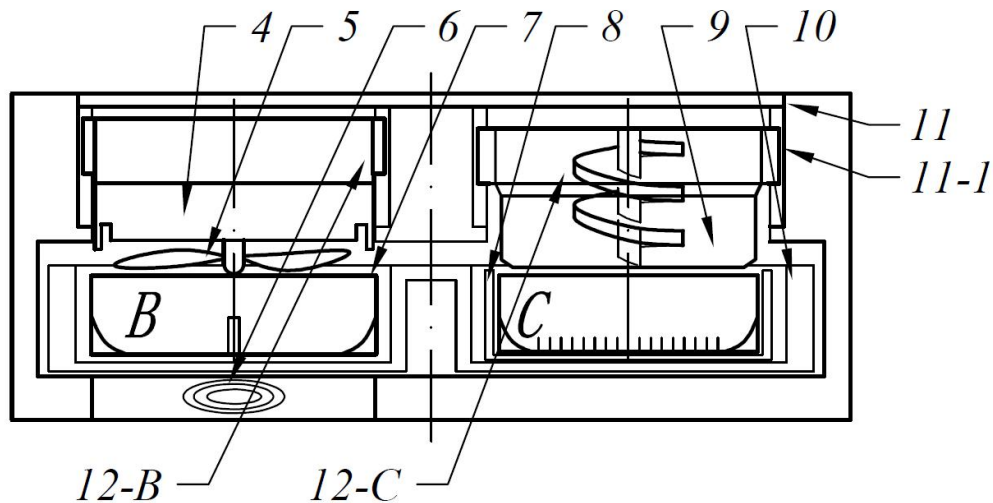


FIG. 1

DRAWINGS

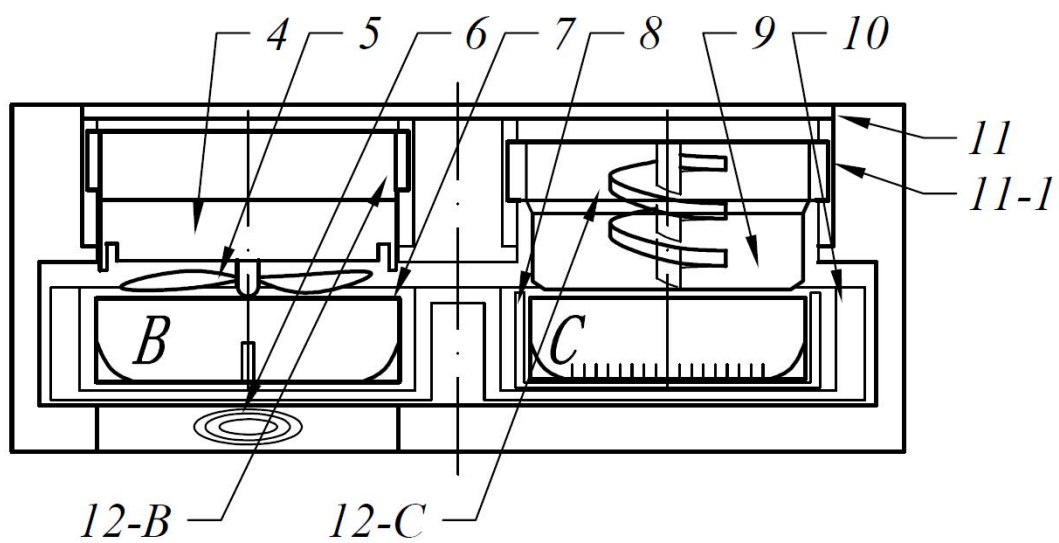


FIG. 1

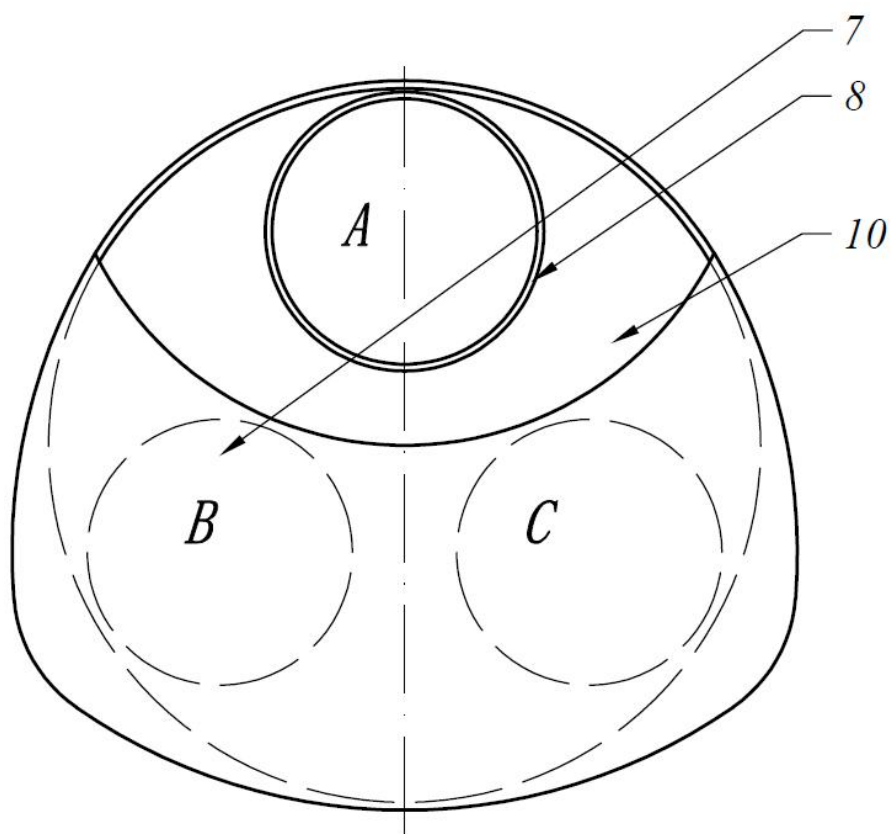


FIG. 2

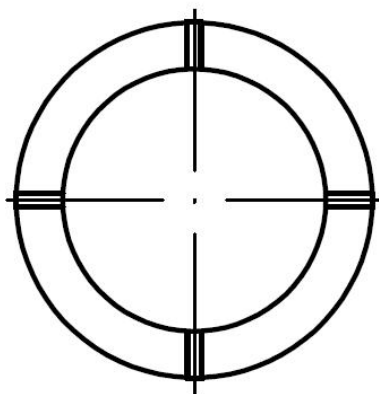


FIG. 3

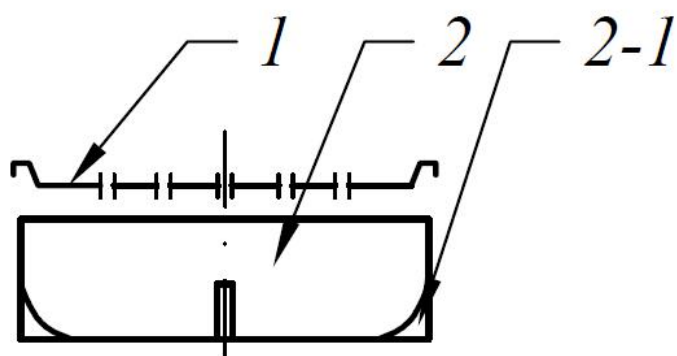


FIG. 4

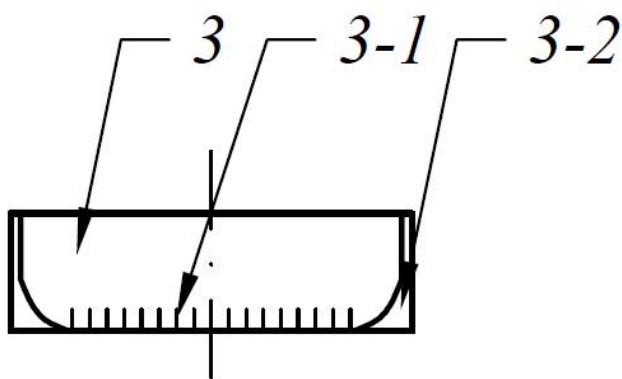


FIG. 5