

A

B

C

D

E


ASSEMBLY NOTES:

Assembly shall conform to IPC-A-610 Class 2.
Assembly shall conform with RoHS Directive 2011/65/EU.
Components shall be placed according to the associated CPL and BOM documents.
Lead-free SAC305 solder shall be used.
Reflow profile shall comply with J-STD-20C Lead-Free Reflow Profile.
BGA components shall be 100% checked with x-ray for solder bridges after reflow.
Finished assemblies shall be removed from panel prior to delivery.


Notes:

- 1
- 2
- 3
- Camera module will be supplied and installed by customer. J2 is SMT connector only.

[Variant:]: View from Bottom side (Scale 4:1)

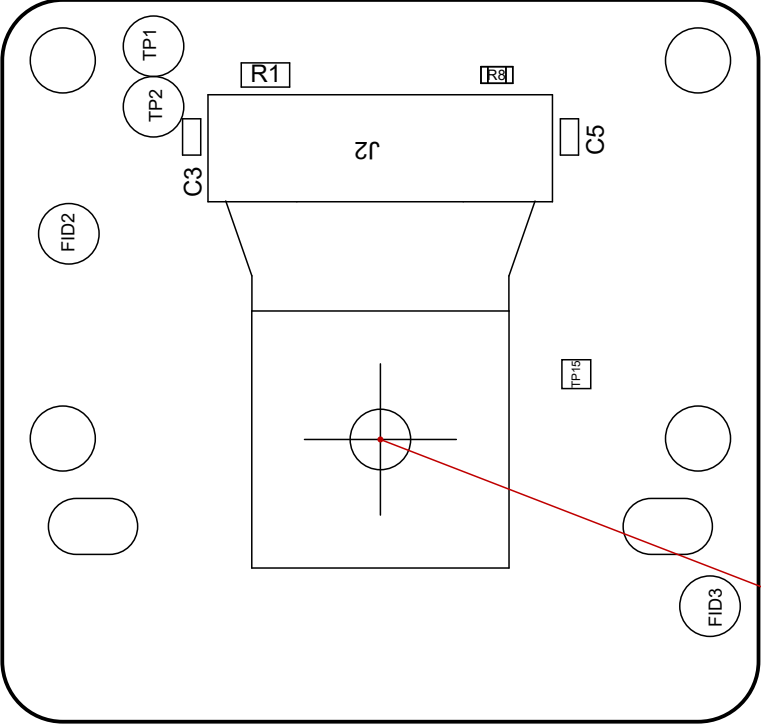

1

Title: DM0260		
Number: D0000999	Revision: R4M2 E2	
Date: 23. 10. 2023	Sheet: 1 of 2	PROPRIETARY AND CONFIDENTIAL
Drawn by: David Malovrh		THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF LUXONIS HOLDING CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION IS PROHIBITED.

A


B


C


D


E

View from Top side (Scale 4:1)

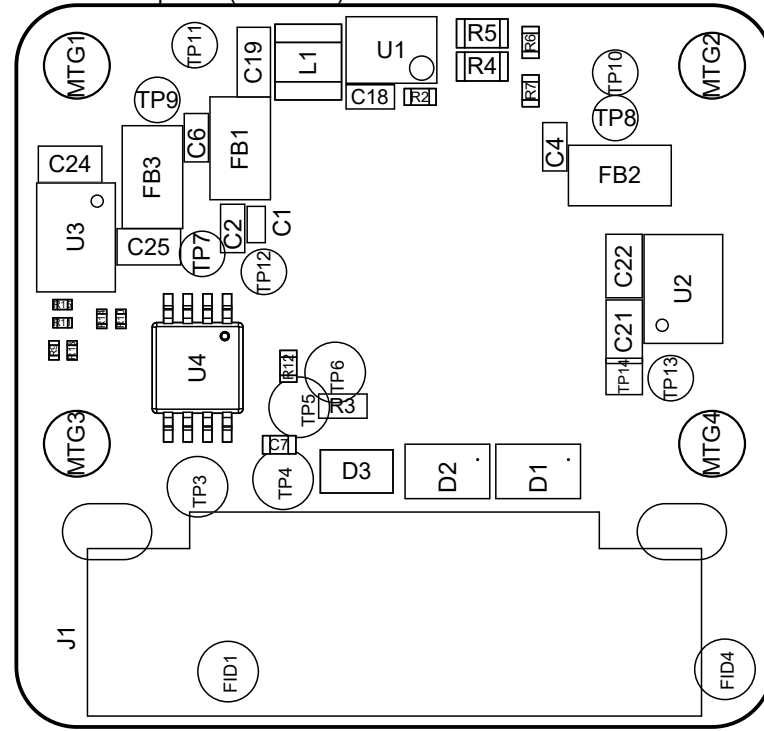

Title: DM0260		
Number: D0000999	Revision: R4M2 E2	
Date: 23. 10. 2023	Sheet: 2 of 2	PROPRIETARY AND CONFIDENTIAL
Drawn by: David Malovrh		THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF LUXONIS HOLDING CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION IS PROHIBITED.

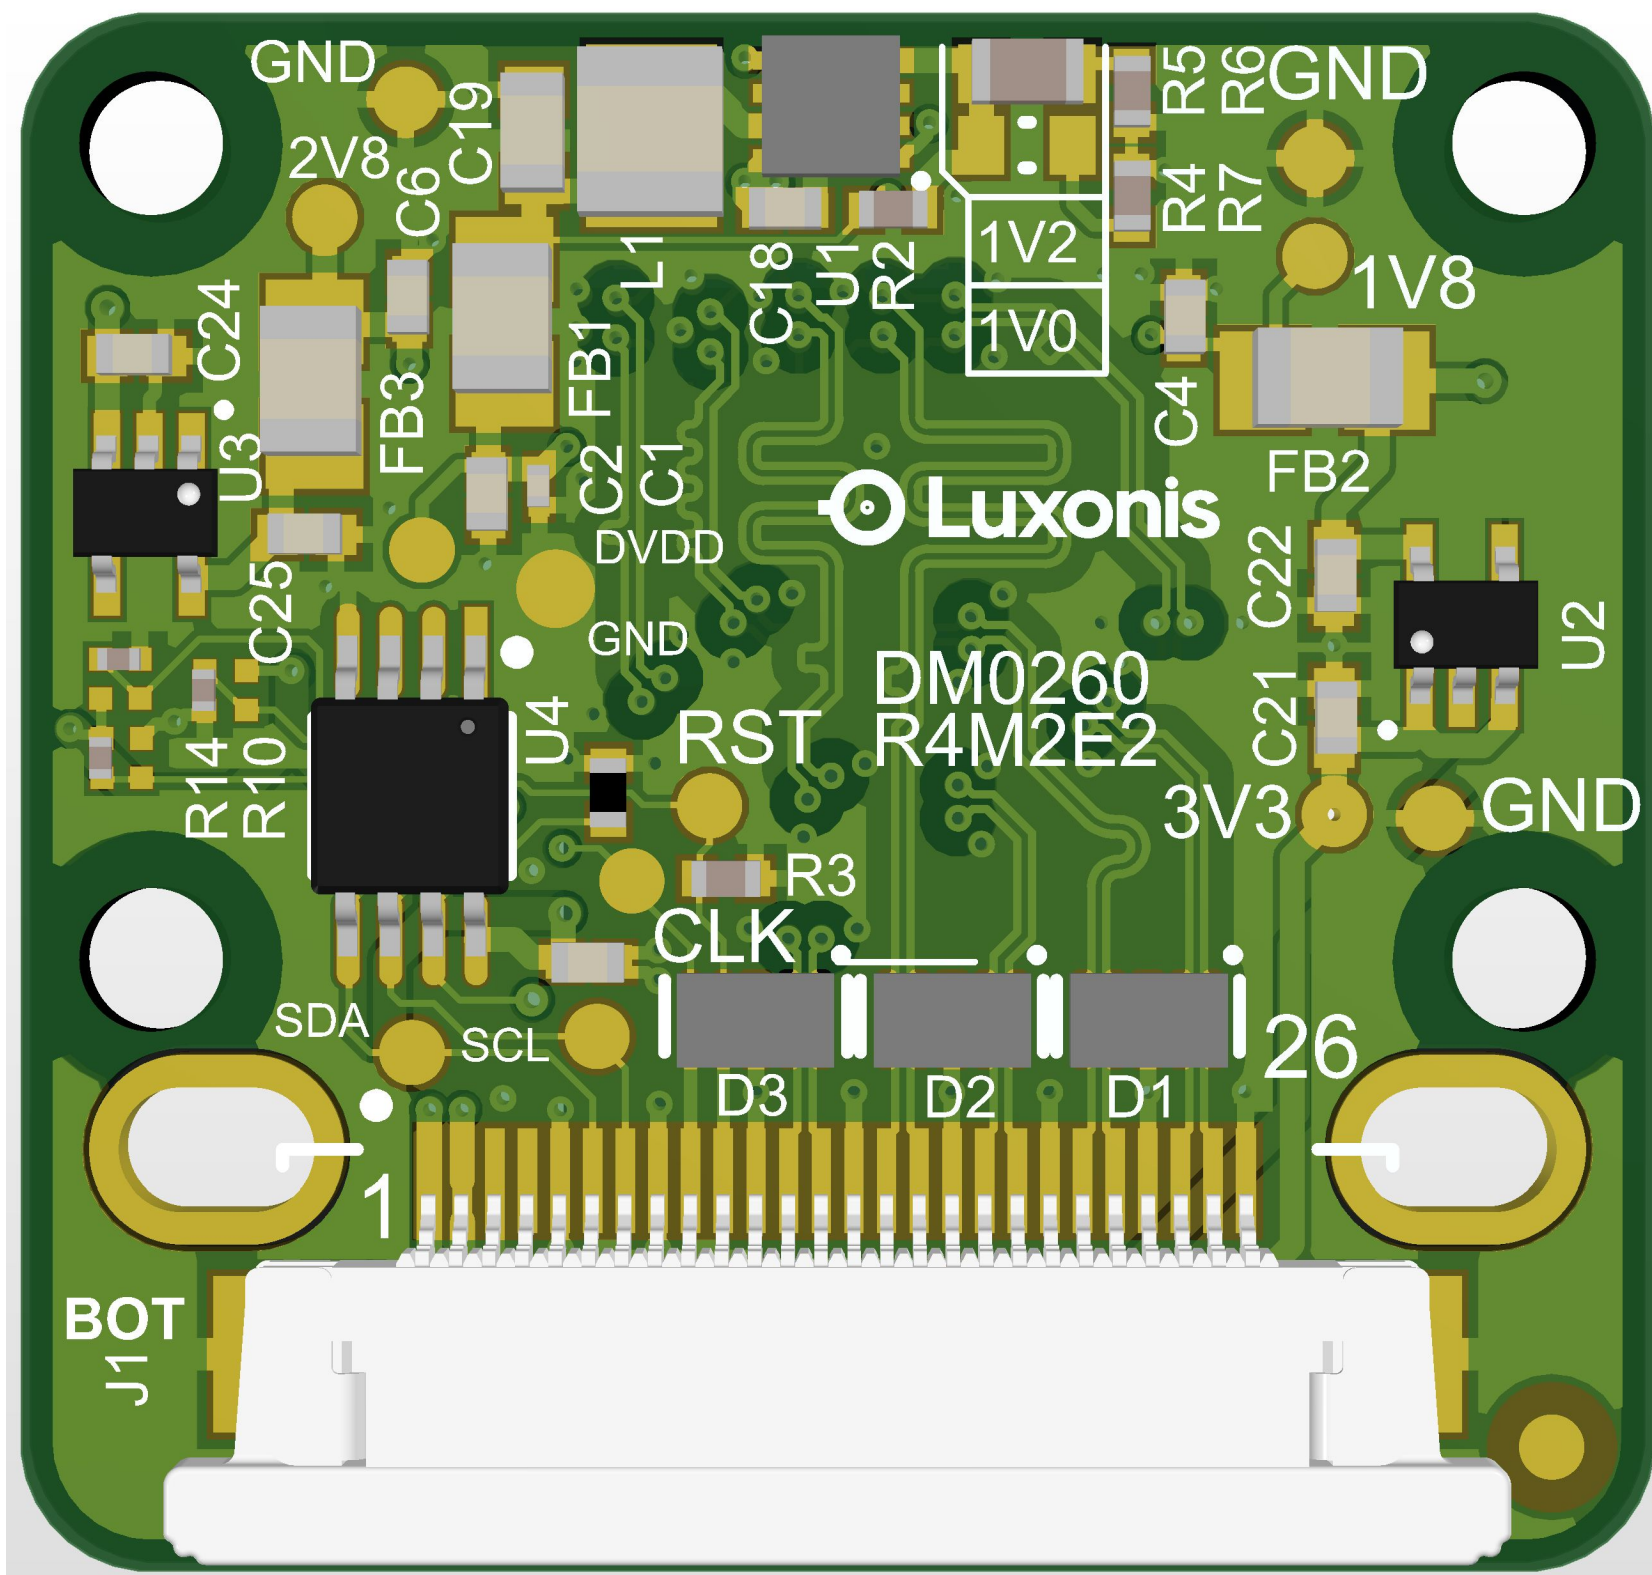

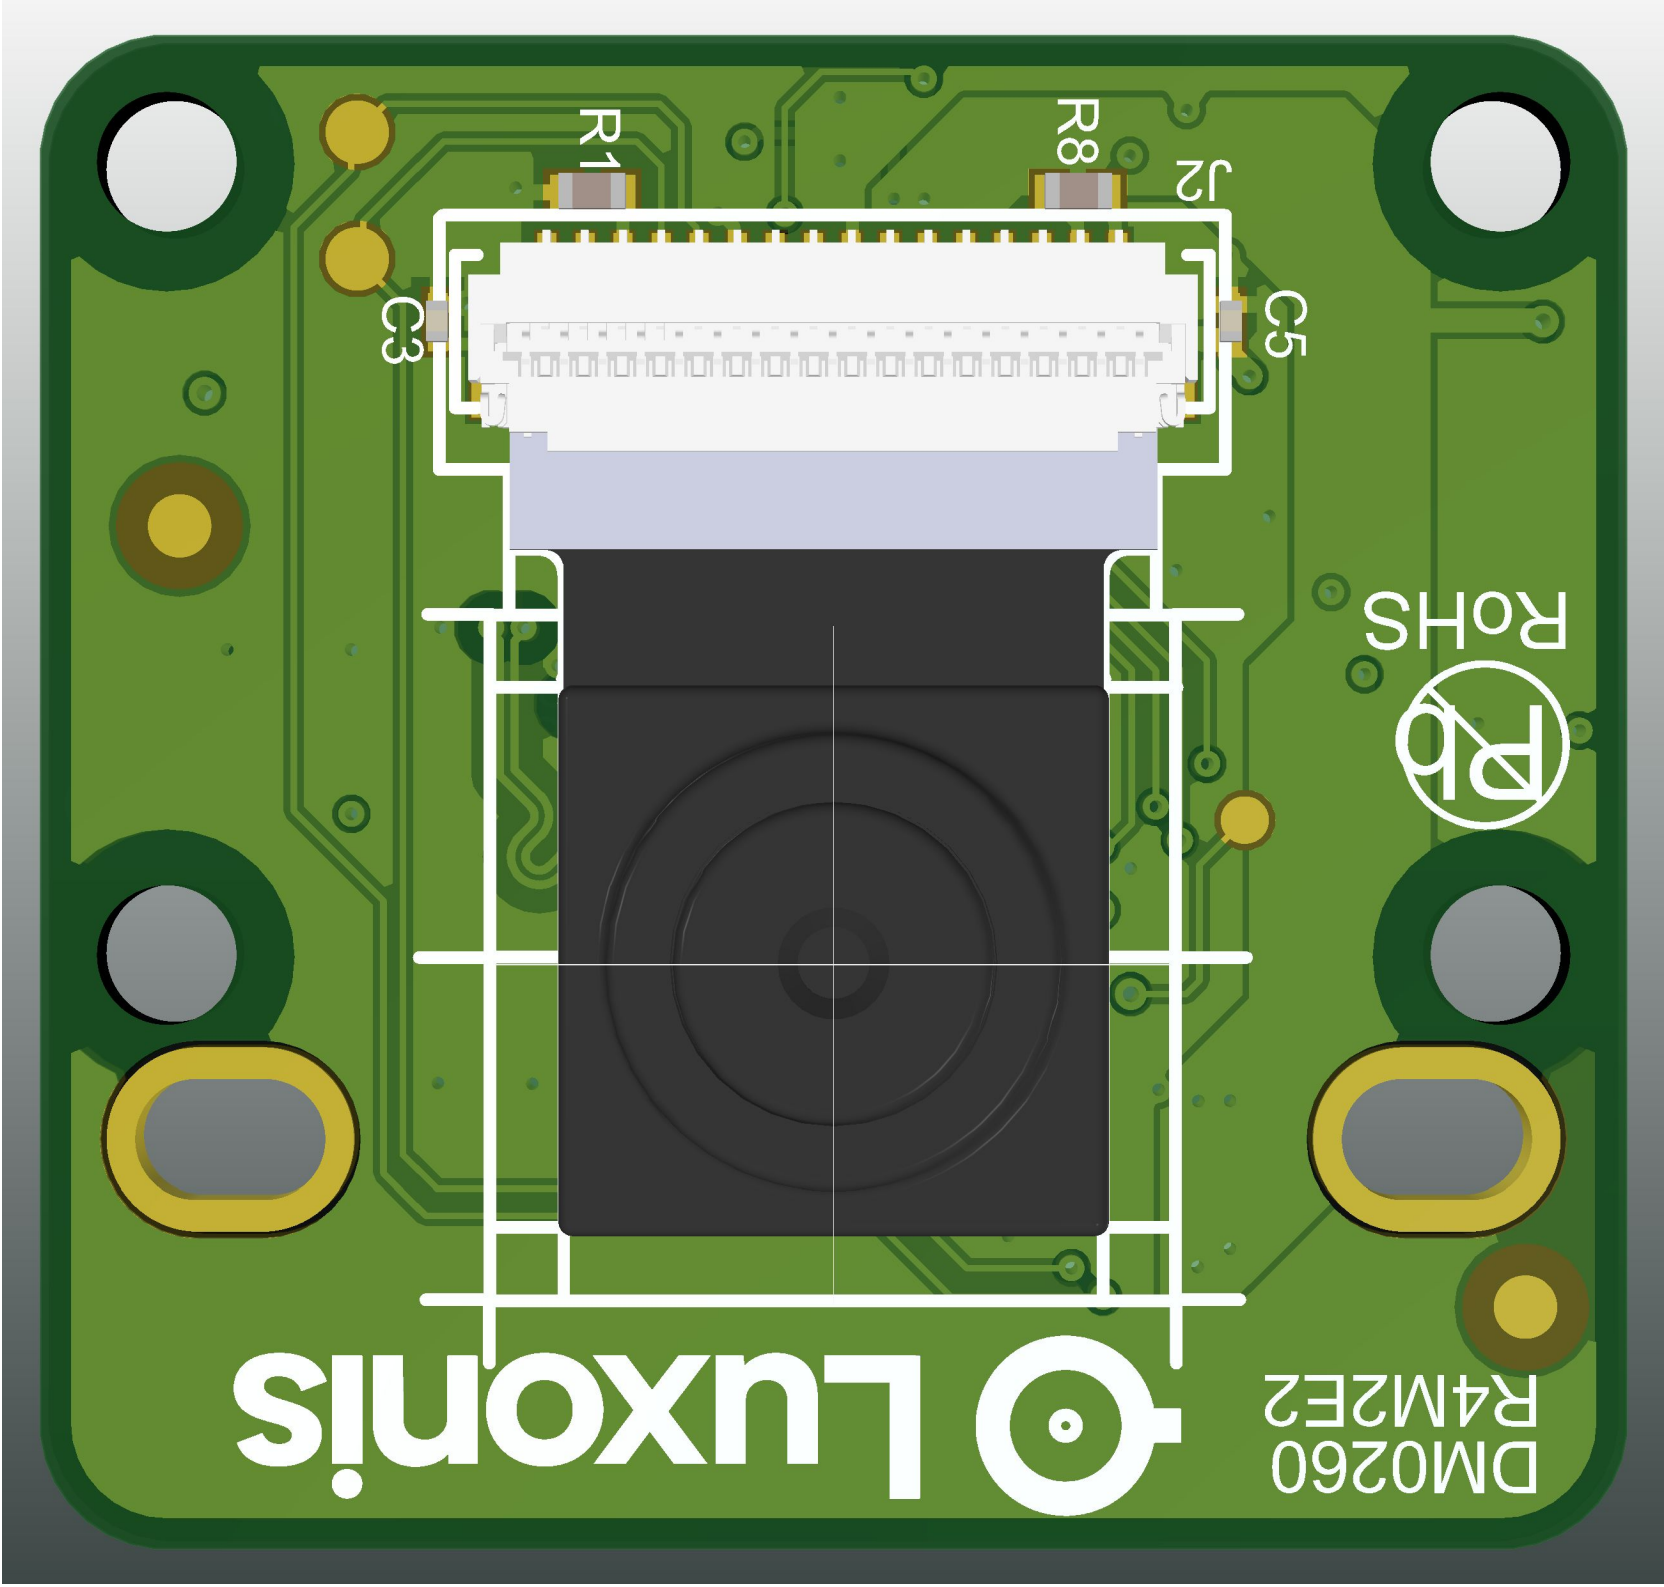

DM0260
R4M2E2



Luxonis



RoHS