

OAK-1 Lite (USB boot)

1 Features

- Movidius Myriad X VPU
- 32Kb I2C EEPROM
- USB3.1, gen2 10gbps
- 1x 4-lane MIPI connects IMX214 13.1 MP color rolling shutter camera
- ¼ -20 tripod mount on the bottom of the unit
- Mounting holes with 2x M4 holes spaced 2.5cm on the back of the unit.

2 Applications

- Industrial automation
- Robotics
- Surveillance IP camera
- Security systems
- Remote intelligence

3 Description

The Luxonis OAK-1 is an AI Edge vision system driven by Movidius Myriad X VPU. The system is powered over a USB Type-C. OAK-1 has a single on-board camera which implements RGB vision, piped directly into the DepthAI Myriad X VPU for depth and AI processing. The data is then output to a host via USB 3.1 Gen1

Device Information

PART NUMBER	SIZE (WxHxD)
OAK-1 Lite	35mm x 54.5mm x 27.88mm



Figure 1 - OAK-1 Lite

Table of Contents

1	FEATURES.....	1
2	APPLICATIONS.....	1
3	DESCRIPTION.....	1
4	ELECTRICAL CHARACTERISTICS.....	3
4.1	ABSOLUTE MAXIMUM RATINGS ¹	3
4.2	RECOMMENDED OPERATING CONDITIONS.....	3
5	CAMERA SENSORS CHARACTERISTICS.....	4
5.1	COLOR CAMERA.....	4
6	MECHANICAL INFORMATION.....	5

4 Electrical Characteristics

4.1 Absolute Maximum Ratings¹

SYMBOL	RATINGS	MIN	MAX	UNIT
V_{BUS}	USB input supply voltage range. ²	3.5	5.5	V
I_{VBUS}	Maximum input current requirement		2	A
T_{stq}	Ambient temperature	0	60	C

4.2 Recommended Operating Conditions

SYMBOL	RATINGS	MIN	TYP	MAX	UNIT
V_{BUS}	VBUS input supply voltage		5V	5.25	V
P	Power consumption requirement	4	5	7.5	W
P_{IDLE}	VBUS idle power draw (Myriad X booted)		2.5		W
T_A	Ambient operating temperature			50	°C

- 1) Stresses beyond those listed under *Absolute Maximum Ratings* may cause permanent damage to the device. These are stress ratings only, which do not imply functional operation of the device at these or any other conditions beyond those indicated under *Recommended Operating Conditions*. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.
- 2) According to industry standard Universal Serial Bus (USB) specifications

5 Camera sensors characteristics

5.1 Color Camera

The color sensor on the stereo depth module in addition to color image provides texture information. Usages for the texture information include overlay on a depth image to create a color point cloud and overlay on a 3D model for reconstruction.

Parameter	Value
Image sensor	Sony IMX214
Active pixels	4208x3120 @60fps
Focus type	Auto Focus 8cm - ∞ / Fixed Focus 50cm- ∞
FOV	DFOV: 81.3 °
Shutter Type	Electronic shutter
IR sensitive	No

6 Mechanical Information

The following information is the most current data available for the designated device. This data is subject to change without notice and without revision of this document.

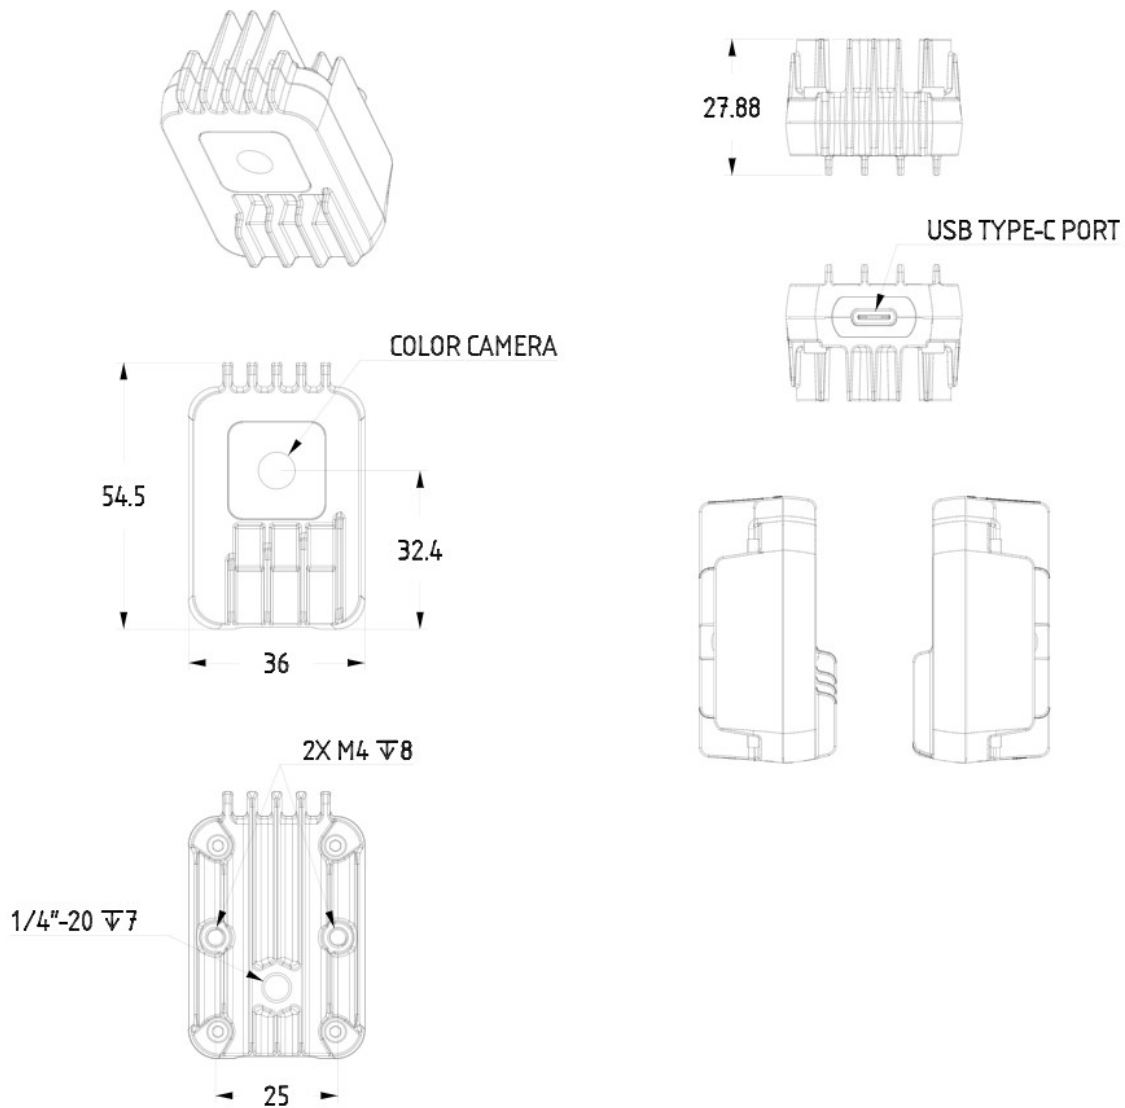


Figure 2 - OAK-1 Lite Mechanical measurements