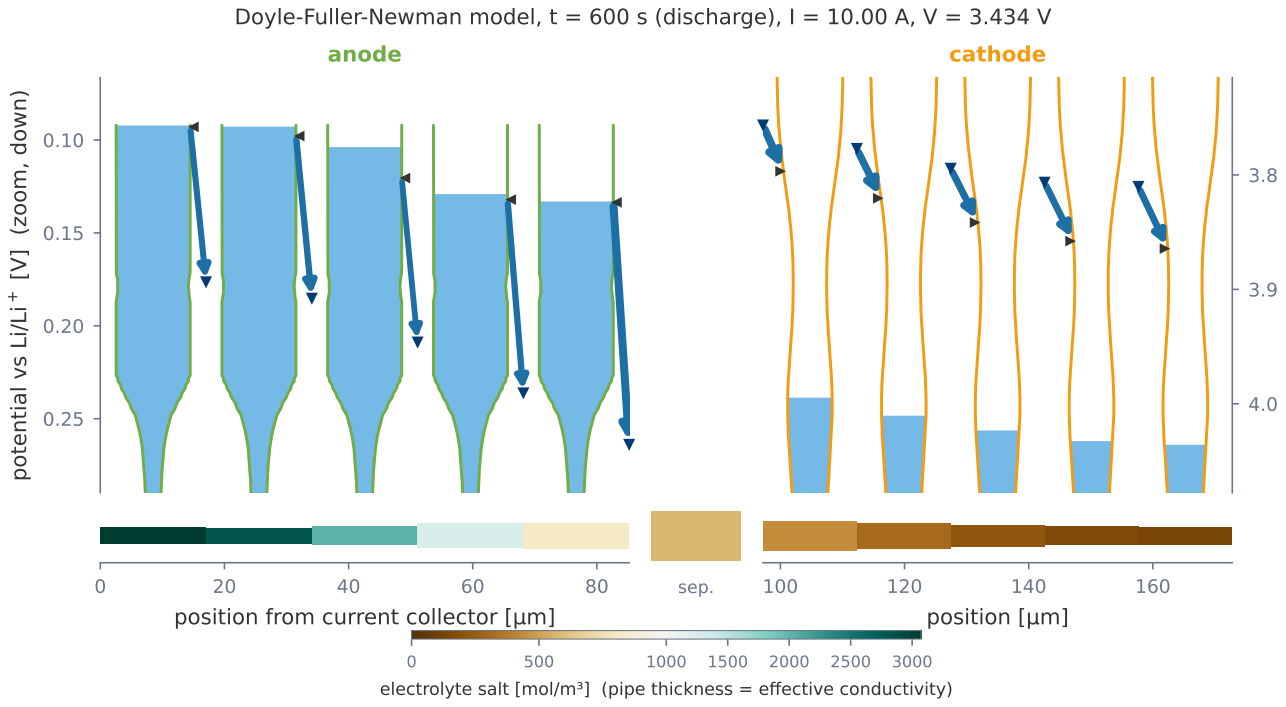

Doyle-Fuller-Newman model, t = 600 s (discharge), I = 10.00 A, V = 3.434 V
anode
cathode
potential vs Li/Li+ [V] (zoom, down)
0.10
0.15
0.20
0.25
3.8
3.9
4.0
0
20
40
60
80
sep.
100
120
140
160
position from current collector [µm]
position [µm]
0
500
1000
1500
2000
2500
3000
electrolyte salt [mol/m³] (pipe thickness = effective conductivity)