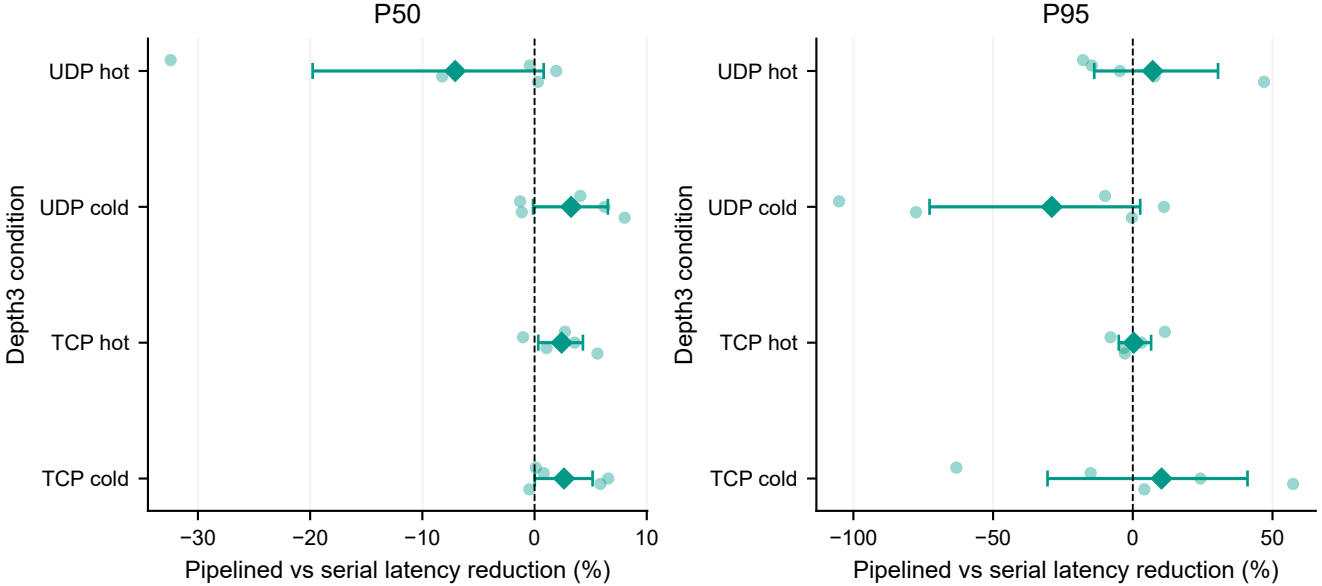
P50
P95
UDP hot
UDP cold
TCP hot
TCP cold
Depth3 condition
−30
−20
−10
0
10
−100
−50
0
50
Pipelined vs serial latency reduction (%)
Pipelined vs serial latency reduction (%)