


LWL-Haubenmuffe



Eigenschaften:

- IP-Schutzart: IP68, IEC529
- Alle Minimalradien für Glasfaserkabel sind garantiert.
- Spleisskassetten für Crimp und Schrumpf Erhältlich.
- Geeignet für alle Kabeltypen (Aussenkabel, Microkabel usw.)
- Verschiedene Kabeleinführungen und Anordnungen erhältlich.
- Einfache Installation
- Einzigartiges Schliesssystem der Haube

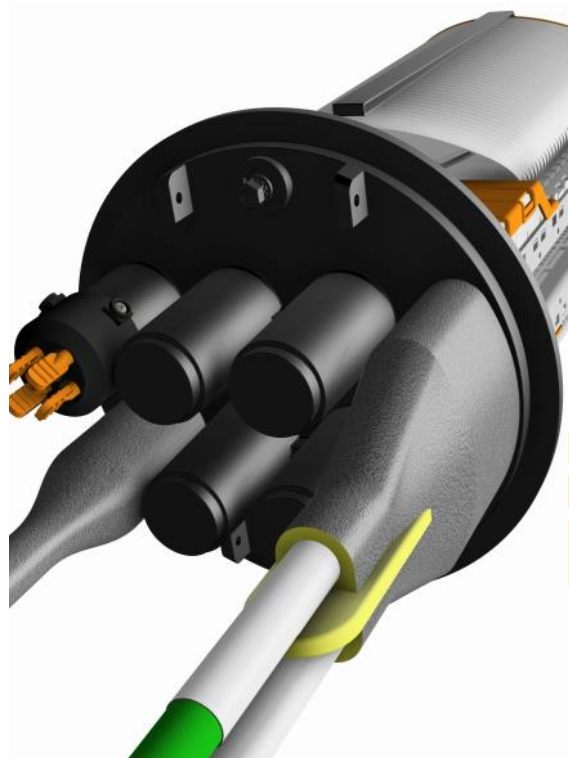

Closure size matrix

DOME SIZE BASE TYPE		A	B	C
				
		Dimensions: Ø246x292mm	Dimensions: Ø246x417mm	Dimensions: Ø246x596mm
A	 Port inner dimensions: 1 oval 32x80mm 6 round Ø32mm	 FDC-AA Dimensions: 320x380mm Tray pack capacity: 6 Splice capacity: 432	 FDC-AB Dimensions: 320x505mm Tray pack capacity: 14 Splice capacity: 1008	 FDC-AC Dimensions: 320x683mm Tray pack capacity: 22 Splice capacity: 1584
B	 Port inner dimensions: 1 oval 32x80mm 8 round Ø21mm 8 round Ø16mm	 FDC-BA Dimensions: 320x380mm Tray pack capacity: 6 Splice capacity: 432	 FDC-BB Dimensions: 320x505mm Tray pack capacity: 14 Splice capacity: 1008	 FDC-BC Dimensions: 320x683mm Tray pack capacity: 22 Splice capacity: 1584
C	 Port inner dimensions: 2 oval 32x80mm 8 round Ø32mm	 FDC-CA Dimensions: 320x380mm Tray pack capacity: 6 Splice capacity: 432	 FDC-CB Dimensions: 320x505mm Tray pack capacity: 14 Splice capacity: 1008	 FDC-CC Dimensions: 320x683mm Tray pack capacity: 22 Splice capacity: 1584

Ordering information

CLOSURE TYPE	PART NUMBER	DESCRIPTION
FDC-AA-BASIC	17.190.500-737	1 oval + 6 round ports, H=380mm, pressure test, ground feed- through, no splice trays
FDC-AB-BASIC	17.190.500-738	1 oval + 6 round ports, H=505mm, pressure test, ground feed- through, no splice trays
FDC-AC-BASIC	17.190.500-A11	1 oval + 6 round ports, H=683mm, pressure test, ground feed- through, no splice trays
FDC-BA-BASIC	17.190.500-A12	1 oval + 16 round ports, H=380mm, pressure test, ground feed- through, no splice trays
FDC-BB-BASIC	17.190.500-A13	1 oval + 16 round ports, H=505mm, pressure test, ground feed- through, no splice trays
FDC-BC-BASIC	17.190.500-A14	1 oval + 16 round ports, H=683mm, pressure test, ground feed- through, no splice trays
FDC-CA-BASIC	17.190.500-A15	2 oval + 8 round ports, H=380mm, pressure test, ground feed- through, no splice trays
FDC-CB-BASIC	17.190.500-A16	2 oval + 8 round ports, H=505mm, pressure test, ground feed- through, no splice trays
FDC-CC-BASIC	17.190.500-A17	2 oval + 8 round ports, H=683mm, pressure test, ground feed- through, no splice trays

Mechanical seals characteristics

SEAL TYPE		PORTS	SEALING RANGE	COMPATIBILITY
FDCKIT-OPCS-2X20mm		2	14mm≤Ø≤20,5mm	Oval port. All CPE closures
FDCKIT-OPCS-2X16mm		2	7mm≤Ø≤16,5mm	Oval port. All CPE closures
FDCKIT-RPCS-1X20mm		1	15mm≤Ø≤20,5mm	Round port. All CPE closures, but FDC-Bx series
FDCKIT-RPCS-1X16mm		1	10mm≤Ø≤16,5mm	Round port. All CPE closures, but FDC-Bx series
FDCKIT-RPCS-2X12mm		2	8mm≤Ø≤12,5mm	Round port. All CPE closures, but FDC-Bx series
FDCKIT-RPCS-4X10mm		4	6mm≤Ø≤10,5mm	Round port. All CPE closures, but FDC-Bx series
FDCKIT-RPCS-4X8mm		4	5mm≤Ø≤8,5mm	Round port. All CPE closures, but FDC-Bx series
FDCKIT-RPCS-8X6mm		8	3mm≤Ø≤6,5mm	Round port. All CPE closures, but FDC-Bx series
FDCKIT-RPCS-12X4mm		12	0mm≤Ø≤4,5mm	Round port. All CPE closures, but FDC-Bx series

Heatshrink seals characteristics

SEAL TYPE		SEALING RANGE	COMPATIBILITY
FDCKIT-OPHS		10mm≤Ø≤27mm	Oval port. All CPE closures
FDCKIT-RPHS		10mm≤Ø≤30mm	Round port. All CPE closures, but FDC-Bx series
FDCKIT-RPHS-B		6mm≤Ø≤21mm	Round port. Only for CPE FDC-Bx series

Ordering information

SEAL TYPE	PART NUMBER		SEAL TYPE	PART NUMBER
FDCKIT-OPCS-2X20mm	17.750.500-A19		FDCKIT-RPCS-4X8mm	17.750.500-634
FDCKIT-OPCS-2X16mm	17.750.500-633		FDCKIT-RPCS-8X6mm	17.750.500-761
FDCKIT-RPCS-1X20mm	17.750.500-A20		FDCKIT-RPCS-12X4mm	17.750.500-A07
FDCKIT-RPCS-1X16mm	17.750.500-862		FDCKIT-OPHS	17.750.500-770
FDCKIT-RPCS-2X12mm	17.190.500-861		FDCKIT-RPHS	17.750.500-789
FDCKIT-RPCS-4X10mm	17.190.500-A00		FDCKIT-RPHS-B	17.750.500-A21

Characteristics

STP	TRAY TYPE	SPLICE CAPACITY	F.O. CAPABILITY
STP-6-24M		N° Trays x pack: 6 Splice protector type: • 24 x μ -heatshrink $\varnothing 1,4 \times 40 \text{ mm}$ • 12 x ANT STP total splices: 144 or 72	Fiber compatibility: • G.652 • G.657 Fiber 250 μm storage lenght x splice side: $\leq 0,75 \text{ m}$
STP-3-PLC		N° Trays x pack: 3 Splice protector type: • 32 x μ -heatshrink $\varnothing 1,4 \times 40 \text{ mm}$ • 16 x ANT • 2 PLC (4x7x50mm)	Fiber compatibility: • G.652 • G.657 Fiber 250 μm storage lenght x splice side: $\leq 1,2 \text{ m}$
STP-6-8S		N° Trays x pack: 6 Splice protector type: • 8 x heatshrink $\varnothing 2,5 \times 45 \text{ mm}$ STP total splices: 48	Fiber compatibility: • G.652 • G.657 Fiber 250 μm storage lenght x splice side: $\leq 2 \text{ m}$
STP-3-24S		N° Trays x pack: 3 Splice protector type: • 24 x heatshrink $\varnothing 2,5 \times 45 \text{ mm}$ STP total splices: 72	Fiber compatibility: • G.652 • G.657 Fiber 250 μm storage lenght x splice side: $\leq 2 \text{ m}$
STP-6-2x6S		N° Trays x pack: 6 Splice protector type: • 12 x heatshrink $\varnothing 2,5 \times 45 \text{ mm}$ (6 on each side of the tray) STP total splices: 72	Fiber compatibility: • G.652 • G.657 Fiber 250 μm storage lenght x splice side: $\leq 1,5 \text{ m}$
STP-6-12S		N° Trays x pack: 6 Splice protector type: • 12 x heatshrink $\varnothing 2,5 \times 45 \text{ mm}$ STP total splices: 72	Fiber compatibility: • G.652 • G.657 Fiber 250 μm storage lenght x splice side: $\leq 1,5 \text{ m}$

Ordering information

STP TYPE	PART NUMBER	DESCRIPTION
STP-6-24M	17.150.500-700	Splice tray pack for 6x24 μ -heatshrink or 6x12 ANT splice protectors
STP-3-PLC	17.150.500-701	Splice tray pack for 3x32 μ -heatshrink or 3x16 ANT splice protectors and 6x2 PLC up to 1:32
STP-6-8S	17.150.500-702	Splice tray pack for 6x8 heatshrink 45mm splice protectors
STP-3-24S	17.150.500-703	Splice tray pack for 3x24 heatshrink 45mm splice protectors
STP-6-2x6S	17.190.500-869	Splice tray pack for 6x12 heatshrink 45mm splice protectors (6 on each side of the tray)
STP-6-12S	17.190.500-A18	Splice tray pack for 6x12 heatshrink 45mm splice protectors