

Milesight

V8.0



Smart Building Sensor

IAQ & Space Optimization

Facility Management

Energy Management

People Sensing

Milesight IoT Product Portfolio

Make Sensing Matter



5G Series | Industrial Cellular Router | LoRaWAN® Gateway | LoRaWAN® Sensor | IoT Controller

Terms:

Term of Delivery: EXW Xiamen, China

Support: Milesight provides real-time service and related technical support of product until clients can use it normally.

Warranty: 5G Series / Industrial Cellular Routers / LoRaWAN Gateways / IoT Controllers come with 3-year warranty; LoRaWAN Sensors come with 2-year warranty (Gas detecting probes will come with a 1-year warranty.).

Batteries are not included in the warranty.

Period of Validity: 15th July 2025 - 15th January 2026

MSRP: Manufacturer's Suggested Retail Price

MAP: Minimum Advertised Price

Welcome to visit www.milesight.com to get more information.

5G Series

5G Dongle								
Picture	Model	Description	GPS	PoE PD	Wi-Fi	Standard Price+	MSRP	MAP
	UF31-554AE	5G / GPS Supported 1 * SIM 1 * 10/100/1000Mbps 1 * USB 3.0 (for Data Transmission & Power) DC 5 ~ 24V IP30 Rated Practical 5G Embedded Applications / Tiny Size Region: EMEA / Asia-Pacific <i>GPS is under development and will be supported in Q2.</i>	✓			US\$375.00	US\$900.00	US\$600.00
5G CPE								
Picture	Model	Description	GPS	PoE PD	Wi-Fi	Standard Price+	MSRP	MAP
	UF51-504AE	5G / GPS / PoE PD Supported 1 * SIM 1 * 10/100/1000Mbps(LAN2) 1 * 10/100/1000/2500Mbps(LAN1/WAN) (1 * WAN + 1 * LAN or 2 * LAN) 1 * RS485 (RS232 Hardware Optional) 1 * DI + 1 * DO IP67 Rated Region: EMEA / Asia-Pacific <i>Optional: Wi-Fi 6</i>	✓	✓		US\$423.00	US\$1,014.00	US\$676.00
	UF51-504AE-W4		✓	✓	✓	US\$482.00	US\$1,155.00	US\$770.00

5G AI Motorized Pro Bullet Plus Network Camera								
Picture	Model	Description	Resolution	Lens	Field of View	Standard Price+	MSRP	MAP
 	MS-C2966-RFGPE (1/2.8")	5G (Low Latency / High Mobility / Broad Extensibility) PoE 3-Axis Design 1 * Nano SIM / 1 * MicroSD Alarm I/O + Audio I/O + DC 12V Support H.265+ / H.265 / H.264+ / H.264 Integrated Cable Management AI based Video Content Analysis / People Counting & Report / Face Detection / Heat Map IP67 Rated (for Camera Body Only) Optional: High Frame Rate: \$20 (-T Series: 2MP@100fps+ Super WDR Pro)	2MP 1920*1080 @60fps	Motorized Lens 2.7~13.5mm	H113°~H33° D130°~D38° V60°~V18°	US\$479.00	US\$1,305.00	US\$762.00
			Ultra Low-light	WDR	IR Distance			
			Color: 0.005Lux @F1.4	140dB	65m			
	MS-C8266-FGPE (1/1.8")		Resolution	Lens	Field of View	Standard Price+	MSRP	MAP
			8MP(4K) 3840*2160 @30fps	Motorized Lens 3.6~10mm	H116°~H48° D134°~D55° V65°~V27°	US\$534.00	US\$1,455.00	US\$849.00
			Ultra Low-light	WDR	IR Distance			
			Color: 0.009Lux @F1.4	120dB	65m			

5G Cellular Router								
Picture	Model	Description	GPS	PoE PSE	Wi-Fi	Standard Price+	MSRP	MAP
	UR75-504AE-W2	5G / Wi-Fi / GPS Supported 2 * Mini SIM-2FF 5 * 10/100/1000Mbps (1 * WAN + 4 * LAN) 1 * RS232 + 1 * RS485 1 * DI + 1 * DO 1 * USB 3.0 (Type-C) (for Power Supply & Network Supply & Debug) Optional: PoE PSE	✓		✓	US\$420.00	US\$1,005.00	US\$670.00
	UR75-500GL-G-W				✓			
	UR75-504AE-P-W2		✓	✓	✓	US\$438.00	US\$1,050.00	US\$700.00
	UR75-500GL-G-P-W			✓	✓			

Industrial Cellular Router

Mini Industrial Router								
Picture	Model	Description	GPS	PoE PD	Wi-Fi	Standard Price+	MSRP	MAP
	UR41L-L0CEU	Global 4G LTE CAT1 Network 1 * Nano SIM-4FF 1 * 10/100Mbps LAN Port 1 * RS232 + 1 * RS485 (Switchable) 1 * DI + 1 * DO 1 * USB 2.0 (for Power Supply & Network Supply & Debug) IP30 Rated Ultra-low Power Consumption, Configurable Standby Mode and Supports Multiple Wake-up Mechanisms Compact Size for Sulting Small Embedded Scenarios				US\$76.00	US\$180.00	US\$120.00

Mini Industrial Router								
Picture	Model	Description	GPS	PoE PD	Wi-Fi	Standard Price+	MSRP	MAP
	UR41-L08EU	3G & 4G Supported GPS Supported 1 * Nano SIM-4FF 1 * 10/100Mbps LAN Port 1 * RS232 + 1 * RS485 (Switchable) 1 * DI + 1 * DO 1 * USB 2.0 (for Power Supply & Network Supply & Debug) IP30 Rated Compact Size for Sulting Small Embedded Scenarios	✓			US\$114.00	US\$270.00	US\$180.00

Lite Series								
Picture	Model	Description	GPS	PoE PSE	Wi-Fi	Standard Price+	MSRP	MAP
	UR32L-L04EU	3G & 4G Supported 2 * 10/100Mbps (2 * LAN or 1 * WAN + 1 * LAN) Optional: PoE PSE				US\$87.00	US\$207.00	US\$138.00
	UR32L-L04EU-P			✓		US\$99.00	US\$237.00	US\$158.00
	UR32S-L04EU	3G & 4G / Wi-Fi Supported PoE PSE Supported 2 * 10/100Mbps (2 * LAN or 1 * WAN + 1 * LAN) Region: EMEA / Asia-Pacific / Australia			✓	US\$91.00	US\$216.00	US\$144.00
	UR32S-L04EU-P			✓	✓	US\$110.00	US\$264.00	US\$176.00

Pro Series								
Picture	Model	Description	GPS	PoE PSE	Wi-Fi	Standard Price+	MSRP	MAP
	UR32-L04EU-G-485	3G & 4G Supported Dual SIM / 1 * MicroSD 2 * 10/100Mbps (2 * LAN or 1 * WAN + 1 * LAN) Supports 1 * RS232 / RS485 (Switchable) 1 * DI + 1 * DO Optional: Wi-Fi / GPS / PoE PSE	✓			US\$119.00	US\$285.00	US\$190.00
	UR32-L04EU-W-485				✓	US\$126.00	US\$300.00	US\$200.00
	UR32-L04EU-P-W-485			✓	✓	US\$132.00	US\$315.00	US\$210.00

Remark:
Wi-Fi and GPS can't be supported simultaneously in UR32 router.

Picture	Model	Description	GPS	PoE PSE	Wi-Fi	Standard Price+	MSRP	MAP
	UR35-L04EU-W	3G & 4G / Wi-Fi Supported Dual SIM / 1 * MicroSD 5 * 10/100Mbps (1 * WAN + 4 * LAN) 1 * RS232 + 1 * RS485 or 2 * RS485 1 * DI + 1 * DO Optional: GPS / PoE PSE			✓	US\$161.00	US\$384.00	US\$256.00
	UR35-L04EU-G-P-W		✓	✓	✓	US\$200.00	US\$480.00	US\$320.00

Remark:
 ~"L04EU" / ~"L04AU" / ~"L04AF" in the model refers to different 4G modules in option for different countries / regions, (e.g.)
 ~"EU": for Europe and Asia and Africa ~"AU": for South America and Australia ~"AF": for North America

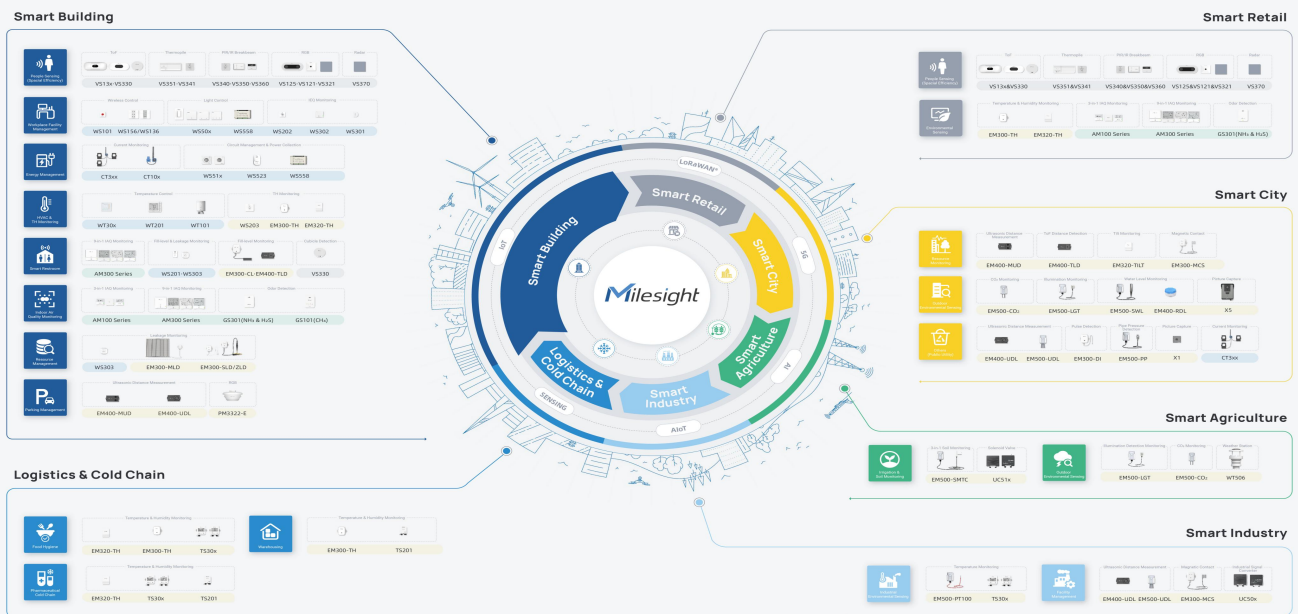
LoRaWAN Gateway

Mini LoRaWAN® Gateway								
Picture	Model	Description	Communication	Cellular	External Antenna	Standard Price+	MSRP	MAP
	UG63-915M	8-CH Wi-Fi Configuration is Supported 1 * 10/100Mbps Multi Backhaul Backups with Ethernet and Cellular (4G) High Cost Performance, Suitable for Small Applications IP30 Rated Optional: Cellular (2G & 3G & 4G)			✓	US\$83.00	US\$180.00	US\$120.00
	UG63-915M (PoE Splitter)							
	UG63-L08GL-915M			✓	✓	US\$110.00	US\$240.00	US\$160.00
	UG63-L08GL-915M (PoE Splitter)							

UG56 Series								
Picture	Model	Description	Communication	Cellular	External Antenna	Standard Price+	MSRP	MAP
	UG56-915M	8-CH Wi-Fi / PoE PD Supported 1 * 10/100Mbps Built-in Network Server Support Listen Before Talk (LBT) for Downlink IP30 Rated Optional: Cellular (2G & 3G & 4G)			✓	US\$146.00	US\$315.00	US\$210.00
	UG56-L08GL-915M			✓	✓	US\$180.00	US\$390.00	US\$260.00

UG65 Series								
Picture	Model	Description	Communication	Cellular	External Antenna	Standard Price+	MSRP	MAP
	UG65-915M-EA	8-CH Wi-Fi / PoE PD Supported 1 * 10/100/1000Mbps Built-in Network Server IP65 Rated Optional: Cellular (2G & 3G & 4G)			✓	US\$234.00	US\$510.00	US\$340.00
	UG65-L08GL-915M-EA			✓	✓	US\$283.00	US\$615.00	US\$410.00

Remark:
 ~"915M" / ~"868M" / ~"470M" in the model refers to different LoRaWAN Frequency in option for different countries / regions, (e.g.)
 ~"915M": KR920 / AS923 / AU915 / US915-4.28dBi ~"868M": IN865 / EU868 / RU864-4.52dBi ~"470M": CN470-0.87dBi
 ~"L04EU" / ~"L04AU" / ~"L04AF" / ~"L08GL" / ~"L09NA" in the model refers to different 4G modules in option for different countries / regions, (e.g.)
 ~"EU": for Europe and Asia and Africa ~"AU": for South America and Australia ~"AF": for North America and ~"GL": for Stands for Worldwide, Except North America and ~"NA": for North America



LoRaWAN Sensor

People Sensing							
AI Workplace Occupancy Sensor							
Picture	Model	Description	Communication	Measuring Range	Standard Price+	MSRP	MAP
	VS121-915M PN: White / Black	Power Supply: 1 * Type-C AI Vision Identification Technology Equipped with Wi-Fi for Web GUI Configuration Advanced Custom Setting: Up to 16 Mapped Regions for Detection / Milesight D2D Controller / Filter U-Turns / Privacy Mask		Installation Height: 2.5m ~ 4m Field of View: 190 ° Horizontal, 112 ° Vertical Recognition Range: Based on a radius of 5 meters (At the Height of 3m) Region Counting Recognition Rate: Up to 95% Line Crossing Counting Recognition Rate: Up to 98%	US\$218.00	US\$504.00	US\$336.00
	VS121-P	Power Supply: DC & PoE PD AI Vision Identification Technology Support Transmitting People Counting and Occupancy Data via HTTP Post Support Milesight DeviceHub Management Remotely Advanced Custom Setting: Up to 16 Mapped Regions for Detection / Filter U-Turns / Privacy Mask / Schedule Detection			US\$225.00	US\$519.00	US\$346.00
AI Workplace Occupancy Sensor (High Ceiling Mount Version)							
Picture	Model	Description	Communication	Measuring Range	Standard Price+	MSRP	MAP
	VS121-915M PN: White-High	Power Supply: 1 * Type-C AI Vision Identification Technology Equipped with Wi-Fi for Web GUI Configuration Advanced Custom Setting: Up to 16 Mapped Regions for Detection / Milesight D2D Controller / Filter U-Turns / Privacy Mask		Installation Height: 5m ~ 7m Field of View: 129.4 ° Horizontal, 68.4 ° Vertical Recognition Range: 18m * 7m (At the Height of 7m) Region Counting Recognition Rate: Up to 95% Line Crossing Counting Recognition Rate: Up to 98%	US\$227.00	US\$525.00	US\$350.00
	VS121-P PN: White-High	Power Supply: DC & PoE PD AI Vision Identification Technology Support Transmitting People Counting and Occupancy Data via HTTP Post Support Milesight DeviceHub Management Remotely Advanced Custom Setting: Up to 16 Mapped Regions for Detection / Filter U-Turns / Privacy Mask / Schedule Detection			US\$234.00	US\$540.00	US\$360.00
AI Stereo Vision People Counter							
Picture	Model	Description	Communication	Measuring Range	Standard Price+	MSRP	MAP
	VS125-P PN: White / Black	Power Supply: DC / PoE 1 * DI + 2 * DO + 1 * RS485 Stereo Vision Technology and AI Algorithm Complies with GDPR With High Ceiling Mounting of up to 6m, Support Automatic Tilt Correction and Automatic Infrared Light Adjustment Support Line Crossing People Counting / U-turn Filtering / Regional People Counting / Children & Adults Differentiation Dwell Time Detection / Group Counting / Staff Detection / Gender Recognition / Heat Map / Multi-Sensor Stitching Provide Multiple Connectivity Options Store Locally 1,000,000 Records and Supports to Export Csv File IP40 Rated		Installation Height: 2m ~ 6m Resolution: 2*4MP Sensor 2688*1520 Field of View: Standard Mode@10°*69° Extended Mode@85°*65° Accuracy: Up to 99.8% Local Storage: 16GB emmc	US\$279.00	US\$645.00	US\$430.00
	VS125-LOBEU PN: White / Black	Power Supply: DC 1 * DI + 2 * DO + 1 * RS485 Stereo Vision Technology and AI Algorithm Complies with GDPR With High Ceiling Mounting of up to 6m, Support Automatic Tilt Correction and Automatic Infrared Light Adjustment Support Line Crossing People Counting / U-turn Filtering / Regional People Counting / Children & Adults Differentiation Dwell Time Detection / Group Counting / Staff Detection / Gender Recognition / Heat Map / Multi-Sensor Stitching Store Locally 1,000,000 Records and Supports to Export Csv File IP40 Rated			US\$305.00	US\$705.00	US\$470.00

Staff Lanyard (Applicable to VS125)							
Picture	Model	Description	Standard Price+	MSRP	MAP		
	VA21	8 * Staff Lanyards Designed for Staff Detection Dimension: 25 * 930mm	US\$11.00	US\$24.00	US\$16.00		
Flush Mount Cover (Applicable to VS125)							
Picture	Model	Description	Standard Price+	MSRP	MAP		
	VC01	Can embed the VS125 into the ceiling, making it more aesthetically pleasing Back and White are optional	US\$6.00	US\$18.00	US\$12.00		
AI ToF People Counting Sensor							
Picture	Model	Description	Communication	Measuring Range	Standard Price+	MSRP	MAP
	VS133-915M PN: White / Black	Power Supply: DC 2nd Generation ToF Technology and AI Algorithm Customized Multiple Counting Lines / U-turn Filtering / Bi-directional Counting / Children/Adults Differentiation / Staff Detection / Dwell Time Detection / Regional People Counting Equipped with Wi-Fi for Web GUI Configuration Acquire People Counting Data from LoRaWAN® Obtain Depth Map without Images Capturing, Free from Privacy Concerns	LoRaWAN™	ToF FoV: 98 ° Horizontal, 80 ° Vertical ToF Light Beam: 940nm (Invisible) Measuring Accuracy: ≤ 3.5cm Detection Range: 0.5m ~ 3.5 m Installation Height: ≤ 3.5m Accuracy: Up to 99.8% Local Storage: 4GB Flash	US\$388.00	US\$897.00	US\$598.00
	VS133-P PN: White / Black	Power Supply: PoE 2nd Generation ToF Technology and AI Algorithm Customized Multiple Counting Lines / U-turn Filtering / Bi-directional Counting / Children/Adults Differentiation / Staff Detection / Dwell Time Detection / Regional People Counting / Multi-Device Stitching / Data Retransmission/ Heat Map Equipped with Ethernet Port for Web GUI Configuration Acquire People Counting Data from Ethernet Port (HTTP / MQTT / CGI) Obtain Depth Map without Images Capturing, Free from Privacy Concerns	PoE				
Ultra ToF People Counter							
Picture	Model	Description	Communication	Measuring Range	Standard Price+	MSRP	MAP
	VS135-915M PN: White/ Black	Power Supply: DC (For LoRaWAN® Version, Cellular Version and WiFi HaLow Version) Power Supply: PoE (For PoE Version)	LoRaWAN™	ToF FoV: 98 ° Horizontal, 80 ° Vertical ToF Light Beam: 940nm (Invisible) Measuring Accuracy: ≤ 3.5cm Detection Range: 0.5m ~ 3.5 m Installation Height: ≤ 3.5m Accuracy: Up to 99.8%	US\$454.00	US\$1,050.00	US\$700.00
	VS135-P PN: White / Black	2nd Generation ToF Technology and AI Algorithm Customized Multiple Counting Lines / U-turn Filtering / Bi-directional Counting / Children / Adults Differentiation / Staff Detection / Data Retransmission/ Dwell Time Detection / Regional People Counting Built-in Radar Sensor Low Carbon Energy Saving Support Video Validation Function Easy Web GUI Configuration Via Wi-Fi By Incorporating 3-axis Sensors for Automatic Compensation When the Device is Mounted at a Tilt Obtain Depth Map without Images Capturing, Free from Privacy Concerns	PoE		US\$447.00	US\$1,035.00	US\$690.00
	VS135-HL-915M PN: White / Black	Support Multi-Device Stitching (For PoE Version) Support Heat Map Function (For PoE Version, Cellular Version and WiFi HaLow Version) Support HTTP(s) / MQTT(s) / CGI for Easily Integration (For PoE Version, Cellular Version and WiFi HaLow Version) Equip with Alarm I/O (For PoE Version) Function Well with Standard LoRaWAN® Gateways and Network Servers (For LoRaWAN® Version) IP65 Rated	Halow™		US\$487.00	US\$1,125.00	US\$750.00
	VS135-L08EU PN: White/Black		3G/4G		US\$499.00	US\$1,155.00	US\$770.00
Remark: "-915M" / "-868M" / "-470M" in the model refers to different LoRaWAN Frequency in option for different countries / regions, (e.g.) "-915M": KR920 / AS923 / AU915 / US915 "-868M": IN865 / EU868 / RU864 "-470M": CN470							
Ultra ToF People Counter (High Ceiling Mount Version)							
Picture	Model	Description	Communication	Measuring Range	Standard Price+	MSRP	MAP
	VS135-915M PN: White-High / Black-High	Power Supply: DC (For LoRaWAN® Version, Cellular Version and WiFi HaLow Version) Power Supply: PoE (For PoE Version)	LoRaWAN™	ToF FoV: 60 ° Horizontal, 45 ° Vertical ToF Light Beam: 940nm (Invisible) Measuring Accuracy: ≤ 6.5cm Detection Range: 2m ~ 6.5 m Installation Height: ≤ 6.5m Accuracy: Up to 99.8%	US\$499.00	US\$1,155.00	US\$770.00
	VS135-P PN: White-High / Black-High	2nd Generation ToF Technology and AI Algorithm Customized Multiple Counting Lines / U-turn Filtering / Bi-directional Counting / Children / Adults Differentiation / Staff Detection / Data Retransmission/ Dwell Time Detection / Regional People Counting Built-in Radar Sensor Low Carbon Energy Saving Support Video Validation Function Easy Web GUI Configuration Via Wi-Fi By Incorporating 3-axis Sensors for Automatic Compensation When the Device is Mounted at a Tilt Obtain Depth Map without Images Capturing, Free from Privacy Concerns	PoE		US\$493.00	US\$1,140.00	US\$760.00
	VS135-HL-915M PN: White-High / Black-High	Support Multi-Device Stitching (For PoE Version) Support Heat Map Function (For PoE Version, Cellular Version and WiFi HaLow Version) Support HTTP(s) / MQTT(s) / CGI for Easily Integration (For PoE Version, Cellular Version and WiFi HaLow Version) Equip with Alarm I/O (For PoE Version) Function Well with Standard LoRaWAN® Gateways and Network Servers (For LoRaWAN® Version) IP65 Rated	Halow™		US\$519.00	US\$1,200.00	US\$800.00
	VS135-L08EU PN: White-High / Black-High		3G/4G		US\$545.00	US\$1,260.00	US\$840.00



Staff Lanyard (Applicable to VS133 / VS135)							
Picture	Model	Description			Standard Price+	MSRP	MAP
	VA31	8 * Staff Lanyards Designed for Staff Detection Equipped with Reflective Stripe Dimension: 25 * 900 * 0.55 ~ 0.65 mm			US\$9.00	US\$18.00	US\$12.00
Bathroom Occupancy Sensor							
Picture	Model	Description	Communication	Measuring Range	Standard Price+	MSRP	MAP
	VS330-915M	3 * 4000mAh ER18505 Li-SOCI2 Replaceable Batteries Battery Life: Around 4 Years (90 Users + within 7 Consecutive Hours per Day) High Detecting Accuracy Based on ToF and PIR 100% Anonymity and GDPR-compliant Damp-proof Coating Adjustable Sensor Angle Testing Mode for Easy Deployment		ToF FoV: 27 ° Detection Range: 0.040 ~ 3.500m PIR Detection Area: 80 ° Detection Distance: Maximum 2.5m Sensor Adjustable Angle: 0°, 15°, 30°, 45°, 60°, 75°	US\$59.00	US\$135.00	US\$90.00
Desk & Seat Occupancy Sensor							
Picture	Model	Description	Communication	Measurement	Standard Price+	MSRP	MAP
	VS340-915M	1 * 4000mAh ER18505 Li-SOCI2 Replaceable Battery Battery Life: Around 4 Years (100 Triggers per Day, 25°C) High Precision PIR Sensor Adjustable Detection Angle Optimal Desk / Seat Arrangement Advanced Features: Milesight D2D Controller NFC Enabled IP30 Rated		Technology: PIR Recognition Rate: Up to 95% PIR Detection Area: 107 ° Horizontal, 107 ° Vertical Detection Distance: Within 1m	US\$39.00	US\$87.00	US\$58.00
	VS341-915M	1 * 4000 mAh ER18505 Li-SOCI2 Replaceable Battery Battery Life: Around 4 Years (100 Triggers per Day, 25°C) High Precision PIR Sensor + Thermopile IR Temperature Sensor Ultra-low Latency Adjustable Detection Angle Optimal Desk / Seat Guidance Advanced Features: Milesight D2D Controller NFC Enabled IP30 Rated		Technology: PIR & Thermopile Recognition Rate: Up to 98% PIR Detection Area: 107 ° Horizontal, 107 ° Vertical Detection Distance: Within 1m	US\$51.00	US\$117.00	US\$78.00
Passage People Counter Sensor							
Picture	Model	Description	Communication	Measurement	Standard Price+	MSRP	MAP
	VS350-915M	2 * 2700 mAh ER14505 Li-SOCI2 Replaceable Batteries Battery Life: Around 4 Years (10min Interval, 25°C, 1000 People per Day) Bi-directional People Counting with Dual PIR Sensors Built-in Temperature Sensor 100% Anonymity and GDPR-compliant Advanced Features: Milesight D2D Controller NFC Enabled IP30 Rated		Technology: Dual PIR Detection Range: Ceiling Mount: Passage Width = 2.8 m (At the Height of 3m) Wall Mount: Passage Width < 3.8 m Installation Height: Ceiling Mount: ≤ 3.0m Wall Mount: 1.2m~1.3m	US\$65.00	US\$150.00	US\$100.00
Mini AI Thermopile People Counter							
Picture	Model	Description	Communication	Measurement	Standard Price+	MSRP	MAP
	VS351-915M PN: White	Power Supply: 1 * Type-C A Built-in Temperature Sensor Support Environmental and Device Operating Temperature Detection 100% Anonymity and GDPR-compliant Support U-Turn Filtering, Bi-directional People Counting, Side by Side Differentiation Advanced Features: Milesight D2D Controller NFC Enabled IP30 Rated		Technology: Radar (Battery Version Only) & Thermopile Installation Height: 2.5 m ~ 3.0 m Detection Range: 5.55 m x 2.30 m @ 3 m Installation Height Sensor Adjustable Angle: 0°~90° Best Operating Temperature: 15 °C ~ 30 °C Detection Rate: Up to 95% (Single Person: Up to 99%)	US\$103.00	US\$237.00	US\$158.00
	VS351-915M PN: White-Battery	4 * 9000 mAh ER26500 Li-SOCI2 Replaceable Batteries Battery Life: Around 1.6 Years (30-min Interval, 25°C, 1000 People per Day) A Built-in Temperature Sensor Support Environmental and Device Operating Temperature Detection 100% Anonymity and GDPR-compliant Support U-Turn Filtering, Bi-directional People Counting, Side by Side Differentiation Advanced Features: Milesight D2D Controller NFC Enabled IP30 Rated			US\$129.00	US\$297.00	US\$198.00
IR Breakbeam People Counter							
Picture	Model	Description	Communication	Measurement	Standard Price+	MSRP	MAP
	VS360-915M	2 * 2700 mAh ER14505 Li-SOCI2 Replaceable Batteries Battery Life: Around 3 Years ((10-min Interval, 2000 People per Day) Bi-directional People Counting without Sunlight Interference Based on IR Breakbeam Technology Visual Data about People Counting Via Screen Smart Scheduled Hibernate Mode to Save Battery Power Advanced Features: Milesight D2D Controller NFC Enabled IP30 Rated		Technology: IR Breakbeam Installation Height: 0.7m ~ 1.2m Detection Range: 1.2m ~ 3 m Detection Rate: Up to 80% (Single Person: Up to 99%)	US\$110.00	US\$255.00	US\$170.00

Radar Human Presence Sensor							
Picture	Model	Description	Communication	Measurement	Standard Price+	MSRP	MAP
	VS370-915M	2 * 2700 mAh ER14505 Li-SOCI2 Batteries Battery Life: Around 5 Years (50 Triggers per Day, 25°C) Support the Sensitivity Configuration of PIR and Radar Sensors Detachable and Movable Magnetic Bracket with an Additional 30° Deflection Angle to Achieve Full Area Coverage 100% Privacy Protection, no Specific Images will be Captured Support Customized Hibernation Periods to Achieve Flexible Control and Save Battery Power Advanced Features: Milesight D2D Controller NFC and Bluetooth Enabled	LoRaWAN™	Technology: Millimeter Wave Radar & PIR Recognition Rate: Up to 99% Radar Detection Distance: Movement: 7.5m Slight Movement: 4.8m Detection Angle: 150° PIR Detection Area: 110 Detection Distance: Within 7m Light Status: Bright/Dim	US\$65.00	US\$150.00	US\$100.00
Rader Fall Detection Sensor							
Picture	Model	Description	Communication	Measurement	Standard Price+	MSRP	MAP
	VS370-915M	Power Supply: DC 5V/ 3A by Type-C Port Equipped with a Millimeter-wave MIMO Array Antenna Support Continuous 24-hour Detection and Management Capabilities Support Fall Detection with a 99% Fall Capture Rate and Less Than 5% False Alarm Rate Support Add Sub Region for Independent Occupancy Detection Support In-bed Detection, Leaving the Bed within the Scheduling Time will Trigger an Alarm 100% Privacy Protection, no Images will be Captured Support On-site Alarms of Buzzer and LED Indicator Advanced Features: Milesight D2D Controller IP65 Rated	LoRaWAN™	Technology: Millimeter Wave Radar Recognition Rate: Up to 99% (Single Person) Installation Height: 2.3m~3m Radar Transceiver: r 24 Transmitters & 22 Receivers FoV: 140 ° Horizontal, 70 ° Vertical Detection Range: 4m*5m	US\$195.00	US\$450.00	US\$300.00
Wireless AI Occupancy Sensor							
Picture	Model	Description	Communication	Measurement	Standard Price+	MSRP	MAP
	VS321-915M PN: White / Black	Power Supply: 4 × ER14505 Li-SOCI2 Batteries Customer-defined preview privacy settings, no data with personal information is transmitted, complies with GDPR Embedded AI recognition algorithm, precise recognition of the human body, headcount accuracy rate of 95% Support people counting and workstation occupancy two detection mode, covering different scenarios detection needs Low power consumption AI chip, effectively reduce the operating power consumption Integration of temperature, humidity, light sensors, all-round perception of the environment, to achieve intelligent control of the scene Support screw installation and adhesive backed installation, easy to operate Advanced Features: Milesight D2D Cotroller, Data Storage, Data Retransmission, Data Retrievability	LoRaWAN™	Recognition Rate: 95% (People Counting), 97% (Occupancy), 95% (Desk Occupancy) Installation Height: 2.4m-4m FoV: 129° Horizontal, 93° Vertical Required Illumination: 200Lux	US\$98.00	US\$225.00	US\$150.00
Remark: "-915M" / "-868M" / "-470M" in the model refers to different LoRaWAN Frequency in option for different countries / regions, (e.g.) "-915M": KR920 / AS923 / AU915 / US915 "-868M": IN865 / EU868 / RU864 "-470M": CN470							
Smart Building							
IAQ & Space Optimization Series / Facility Management Series / Energy Management Series							
Indoor Ambience Monitoring Sensor							
Picture	Model	Description	Communication	Sensor	Standard Price+	MSRP	MAP
	AM102L-915M	2 * 2700mAh ER14505 Li-SOCI2 Replaceable Batteries Battery Life: Over 9 Years (10 min interval, 25°C) NFC Enabled Equipped with Traffic Light Indicator IP30 Rated	LoRaWAN™	Temperature Humidity	US\$35.00	US\$78.00	US\$52.00
	AM102-915M	2 * 2700mAh ER14505 Li-SOCI2 Replaceable Batteries Battery Life: Over 7 Years (10 min interval, 25°C) NFC Enabled E-ink Screen Equipped with Traffic Light Indicator IP30 Rated	LoRaWAN™		US\$42.00	US\$96.00	US\$64.00
	AM103L-915M	2 * 2700mAh ER14505 Li-SOCI2 Replaceable Batteries Battery Life: Over 4 Years (10 min interval, 25°C) NFC Enabled Equipped with Traffic Light Indicator IP30 Rated	LoRaWAN™	Temperature Humidity Carbon Dioxide (CO2)	US\$110.00	US\$255.00	US\$170.00
	AM103-915M	2 * 2700mAh ER14505 Li-SOCI2 Replaceable Batteries Battery Life: Around 3 Years (10 min interval, 25°C) E-ink Screen / Smart Display NFC Enabled Emotion Indication Equipped with Traffic Light Indicator IP30 Rated			US\$124.00	US\$285.00	US\$190.00
	AM307-915M	4 * 2700mAh ER14505 Li-SOCI2 Replaceable Batteries or Type-C Port Power Supply Battery Life: Around 3 Years (10 min interval, 25°C) E-ink Screen / Smart Display NFC Enabled Emotion Indication Equipped with Traffic Light Indicator and Buzzer Alarm IP30 Rated	LoRaWAN™	Temperature Humidity PIR Light TVOC Barometric Pressure Carbon Dioxide (CO2)	US\$195.00	US\$450.00	US\$300.00
	AM308L-915M	4 * 2700mAh ER14505 Li-SOCI2 Replaceable Batteries or Type-C Port Power Supply Battery Life: Around 1.5 Years (10 min interval, 25°C) NFC Enabled Equipped with Traffic Light Indicator and Buzzer Alarm IP30 Rated	LoRaWAN™	Temperature Humidity PIR Light TVOC Barometric Pressure Carbon Dioxide (CO2) PM2.5 & PM10	US\$208.00	US\$480.00	US\$320.00
	AM308-915M	4 * 2700mAh ER14505 Li-SOCI2 Replaceable Batteries or Type-C Port Power Supply Battery Life: Around 1 Years (10 min interval, 25°C) E-ink Screen / Smart Display NFC Enabled Emotion Indication Equipped with Traffic Light Indicator and Buzzer Alarm IP30 Rated	LoRaWAN™	Temperature Humidity PIR Light TVOC Barometric Pressure Carbon Dioxide (CO2) PM2.5 & PM10	US\$253.00	US\$585.00	US\$390.00
	AM319-915M PN: HCHO / O3	5V/1A by Type-C Port E-ink Screen / Smart Display NFC Enabled Emotion Indication Equipped with Traffic Light Indicator and Buzzer Alarm IP30 Rated	LoRaWAN™	Temperature Humidity PIR Light TVOC Barometric Pressure Carbon Dioxide (CO2) Formaldehyde (HCHO) or Ozone (O3) PM2.5 & PM10	US\$227.00	US\$525.00	US\$350.00


Temperature & Humidity Sensor								
Picture	Model	Description	Ingress Protection	Communication	Measuring Range	Standard Price+	MSRP	MAP
	EM300-TH-915M	1 * 4000mAh Li-SOCL2 Battery (Extendable to 2 Batteries) (Optional) Battery Life: 10 Years (10 min Interval) NFC Enabled	IP67		Temperature: -30°C ~ 70°C Humidity: 0% ~ 100% RH	US\$35.00	US\$78.00	US\$52.00
Temperature & Humidity Sensor								
Picture	Model	Description	Ingress Protection	Communication	Measuring Range	Standard Price+	MSRP	MAP
	EM320-TH-915M	2 * 2700mAh ER14505 Li-SOCL2 Batteries Battery Life: Over 10 years (10 min Interval with Data Retransmission disabled, 25°C) NFC Enabled Store Locally 3000 Historical Records Support Retransmission to Prevent Data Loss Material: PC + ABS (Food-Grade)	IP67		Temperature: -30°C ~ 60°C Humidity: 0% ~ 100% RH Installation: Standard Version: Wall Mounting Magnet Version: Magnetic Adsorption	US\$37.00	US\$84.00	US\$56.00
	EM320-TH-915M PN: Magnet							
Temperature & Humidity Sensor with Sensor Shelter Kit								
Picture	Model	Description of Sensor Shelter Kit	Features of Sensor Shelter Kit			Standard Price+	MSRP	MAP
	EM320TH+SS11	Multi-Layer Radiant Protection Shield with Louvered Enclosures Effectively Prevent Direct Sunlight and Ground Reflection from Affecting the Internal Sensors of Instruments High Reflectivity / Low Thermal Conductivity / UV Resistance	Radiation-resistant ABS Engineering Plastic & Stainless Steel Screws Operating Temperature: -40°C ~ 75°C Thermal Insulation Discoloration Resistance Corrosion Resistance			US\$110.00	US\$255.00	US\$170.00
Smart Button								
Picture	Model	Description	Communication	Interface	Standard Price+	MSRP	MAP	
	WS101-915M PN: SOS / Scene	1 * 1650 mAh Li-SOCL2 Battery Battery Life: Over 5 Years (1080 min Interval + 10 Presses per Day) Advanced Features: Milesight D2D Controller NFC Enabled IP30 Rated		Button: 1 * External Button + 1 * Reset Button (Internal) Buzzer: Support	US\$32.00	US\$72.00	US\$48.00	
Remark: "-915M" / "~868M" / "~470M" in the model refers to different LoRaWAN Frequency in option for different countries / regions, (e.g.) "-915M": KR920 / AS923 / AU915 / US915 ~868M"; IN865 / EU868 / RU864 ~470M"; CN470								
Smart Scene Panel								
Picture	Model	Description	Communication	Advanced Features	Standard Price+	MSRP	MAP	
	WS136-915M	2 * 590mAh CR2450 Lithium Coin Cell Batteries Battery Life: Over 3 Years (1080 min Interval + 20 Presses per Day, 25°C) Advanced Features: Milesight D2D Controller PVC Sticker (Customizable) NFC Enabled IP30 Rated		Up to 6 Scenes Settable	US\$47.00	US\$105.00	US\$70.00	
	WS156-915M	2 * 590mAh CR2450 Lithium Coin Cell Batteries Battery Life: Over 3 Years (1080 min Interval + 20 Presses per Day, 25°C) Advanced Features: Milesight D2D Controller User-defined E-ink Screen NFC Enabled IP30 Rated			US\$59.00	US\$135.00	US\$90.00	
Smart Fill Level Monitoring Sensor								
Picture	Model	Description	Communication	Measuring Range	Standard Price+	MSRP	MAP	
	WS201-915M	1 * 590mAh CR2450 Lithium Battery Battery Life: 2 Years Ultra Small Blind Spot Ultra Low Power Consumption Ultra Thin Size for High Compatibility Multi-level Report Mode for Various Applications NFC Enabled IP30 Rated		ToF FoV: 25° Detection Range: 1 ~ 55cm	US\$35.00	US\$78.00	US\$52.00	

PIR & Light Sensor							
Picture	Model	Description	Communication	Measuring Range	Standard Price+	MSRP	MAP
	WS202-915M	1 * 1650mAh Li-SOCL2 Battery Battery Life: Around 4 Years (30 min Interval + 30 Triggers per Day) Advanced Features: Milesight D2D Controller NFC Enabled IP30 Rated		Detection Area: 120 ° Horizontal, 100 ° Vertical Detection Distance: Maximum 8m	US\$29.00	US\$66.00	US\$44.00
Motion & TH Sensor							
Picture	Model	Description	Communication	Measuring Range	Standard Price+	MSRP	MAP
	WS203-915M	1 * 4000mAh ER18505 Li-SOCi2 Batteries Battery Life: Up to 5 Years (30 min Interval + 64 Triggers per Day, 25°C) Equipped with Passive Infrared and Fresnel Lens for Motion or Occupancy Detection Provide Different Types of PIR Covers for Adjustable and Flexible Field Angles and Different Detecting Ranges Advanced Features: Data Storage / Data Retransmission / Milesight D2D Controller NFC Enabled IP30 Rated		Temperature: -20°C ~ 60°C ± 0.2°C Humidity: 0% ~ 100% RH	US\$35.00	US\$78.00	US\$52.00
Magnetic Contact Switch							
Picture	Model	Description	Communication	Measuring Range	Standard Price+	MSRP	MAP
	WS301-915M	1 * 1200mAh Li-SOCL2 Battery Battery Life: Over 5 Years (1080 min Interval + 30 Triggers per Day) Advanced Features: Milesight D2D Controller NFC Enabled 1 * LED		Detection Distance: 15 ~ 20 mm LED: for Network Status, Open / Close Status, Tamper and Low Battery Indication	US\$35.00	US\$78.00	US\$52.00
Sound Level Sensor							
Picture	Model	Description	Communication	Measuring Range	Standard Price+	MSRP	MAP
	WS302-915M	2 * 2700mAh ER14505 Li-SOCi2 Replaceable Batteries Battery Life (10 min Interval): Over 4 Years (Fast Time Weighting disabled) / Over 1.5 Years (Fast Time Weighting enabled) NFC Enabled IP30 Rated		Measuring Range: 30 dBA ~ 120 dBA, 35 dBC ~ 120 dBC Measurement Unit: SPL Actual, Lea, Lmax Frequency Weighting: A and C Weighting (Software Switchable) Time Weighting: Fast Weighting	US\$37.00	US\$84.00	US\$56.00
Mini Leak Detection Sensor							
Picture	Model	Description	Communication	Detection	Standard Price+	MSRP	MAP
	WS303-915M	1 * 590mAh CR2450 Lithium Battery Battery Life: 5 years (One Hour Leakage per Week, 25°C) Advanced Features: Milesight D2D Controller Embedded with a Buzzer for Real-time Alarming NFC Enabled IP67 Rated		Liquid Type: Conductive Liquid Trigger Condition: Once Liquid Level Reaches 0.5mm	US\$37.00	US\$84.00	US\$56.00
Wall Switch							
Picture	Model	Description	Communication	Electrical	Standard Price+	MSRP	MAP
	WS501-915M PN: 3W-W11-EU / 3W-W12-US	NFC Enabled Schedule Switch & Switch Lock Supported Power Consumption Statistics Support Overload Protection		Operating Voltage: 100 ~ 250 VAC, 50 ~ 60 Hz Rated Load: Max 1000 W per Gang, total 0 ~ 2000 W Measurement: Voltage (VAC), Current (mA), Power Factor (%), Power Consumption (kWh), Power (W) Circuit Type: 3-Wire (Neutral Required)	US\$40.00	US\$90.00	US\$60.00
	WS502-915M PN: 3W-W11-EU	Support Multicast Feature to Control Switches in Bulk Advanced Features: Milesight D2D Controller & Milesight D2D Agent 1-Gang / 2-Gang (Optional)					
Wall Socket							
Picture	Model	Description	Communication	Electrical	Standard Price+	MSRP	MAP
	WS513-915M PN: 16A-W11-EU / 16A-W11-FR	NFC Enabled Collect Current / Voltage / Power / Electrical Consumption Support Overload Protection Support Multicast Feature to Control Switches in Bulk Advanced Features: Delay Switch / Button Lock / Overcurrent Protection / Alarm / Multicast / Milesight D2D Agent		Socket Type: EU: Type F, with Safety Door FR: Type E, with Safety Door Input Voltage: 100 ~ 250 VAC, 50 ~ 60 Hz Rated Current: 16A (Max) Measurement: Voltage (VAC), Current (mA), Power Factor (%), Power Consumption (kWh), Power (W)	US\$55.00	US\$126.00	US\$84.00

Portable Socket								
Picture	Model	Description	Communication	Electrical	Standard Price+	MSRP	MAP	
	WS523-915M PN: 10A-US / 10A-AU/ 13A-UK / 15A-US / 16A-EU	Plug and Play NFC Enabled Advanced Features: Schedule Switch / Button Lock / Overcurrent Protection / Alarm / Multicast / Power Outage Alert		Socket & Plug Type: US / EU / AU / UK, etc. Operating Voltage: 100 ~ 250 VAC, 50 ~ 60 Hz Max Load Capacity: 10A / 16A (Optional), 250 VAC Measurement: Voltage(VAC), Current(A), Power Factor (%), Power Meter (kWh), Power (W)	US\$55.00	US\$126.00	US\$84.00	
Remark: ~915M* / ~868M* / ~470M* in the model refers to different LoRaWAN Frequency in option for different countries / regions, (e.g.) ~915M*: KR920 / AS923 / AU915 / US915 ~868M*: IN865 / EU868 / RU864 ~470M*: CN470								
Smart Light Controller								
Picture	Model	Description	Communication	Electrical	Standard Price+	MSRP	MAP	
	WS558-915M PN: LN	NFC Enabled Supports Multicast for Control in Bulk Capable of Controlling up to 8 Circuits of Lights, Adopts Different Indoor Wiring Advanced Features: Milesight D2D Agent / Remote Schedule Switch		Input Voltage: 100 ~ 250 VAC, 50 ~ 60 Hz Output: 8 Active Outputs Capacitive & Inductive Load: Maximum 5A per Output, Total 16A Resistive Load: Maximum 10A per Output, Total 16A Electrical Measurement: Voltage (VAC), Current (mA), Power Factor (%), Power (W), Power Consumption (kW-h)	US\$92.00	US\$210.00	US\$140.00	
	WS558-915M PN: Switch	Input Voltage: 100 ~ 250 VAC, 50 ~ 60 Hz Output: 8 Passive Switches Capacitive & Inductive Load: Maximum 5A per Switch Resistive Load: Maximum 10A per Switch						
IoT E-Ink Display								
Picture	Model	Description	Communication	Display	Standard Price+	MSRP	MAP	
	DS3604-915M	3 * 590mAh CR2450 Lithium Batteries Battery Life: Around 5 Years (Class A Mode + 1 Screen Refresh per Day) / Around 1 Year (Class B Mode + 12 Screen Refreshes per Day) Support Multiple Characters to Display up to 150 Languages Provide API for Management Platform Integration or Development Support Display Template Customization NFC Enabled IP30 Rated		E-ink Screen: 4.2-inch Black & White & Red E-Ink Screen Resolution: 400 * 300 Pixels DPI: 119 Viewing Angle: 180° Refresh Rate: 16s (10°C ~ 40°C)	US\$88.00	US\$204.00	US\$136.00	
Pulse Counter								
Picture	Model	Description	Ingress Protection	Communication	Measuring Range	Standard Price+	MSRP	MAP
	EM300-DI-915M	1 * 4000mAh Li-SOCL2 Battery (Extendable to 2 Batteries) (Optional) Battery Life: 5 Years (10 min Interval) NFC Enabled Flexible Counting Configuration to Enable, Stop, Clear Accumulated Values Cable Length: 1m (Customizable) US\$3.00 dollars for one meter extension cable.	IP67		Temperature: -30°C ~ 70°C Humidity: 0% ~ 100% RH Work Mode: Pulse Counter, Digital Input	US\$42.00	US\$96.00	US\$64.00
Magnetic Contact Switch Sensor								
Picture	Model	Description	Ingress Protection	Communication	Measuring Range	Standard Price+	MSRP	MAP
	EM300-MCS-915M	1 * 4000mAh Li-SOCL2 Battery (Extendable to 2 Batteries) (Optional) Battery Life: 10 Years (10 min Interval + 48 Triggers per Day) NFC Enabled Cable Length: 1.5m	IP67		Detection Distance: 20 ~ 30mm Temperature: -30°C ~ 70°C Humidity: 0% ~ 100% RH	US\$47.00	US\$105.00	US\$70.00
Spot Leakage Detection Sensor								
Picture	Model	Description	Ingress Protection	Communication	Measuring Range	Standard Price+	MSRP	MAP
	EM300-SLD-915M	1 * 4000mAh Li-SOCL2 Battery (Extendable to 2 Batteries) (Optional) Battery Life: 10 Years (10 min Interval + 24 Triggers per Day) NFC Enabled Sensor Type: Probe Cable Length: 1.5m	IP67		Trigger Condition: When Liquid Level Reaches 5mm Temperature: -30°C ~ 70°C Humidity: 0% ~ 100% RH	US\$48.00	US\$108.00	US\$72.00
Zone Leakage Detection Sensor								
Picture	Model	Description	Ingress Protection	Communication	Measuring Range	Standard Price+	MSRP	MAP
	EM300-ZLD-915M	1 * 4000mAh Li-SOCL2 Battery (Extendable to 2 Batteries) (Optional) Battery Life: 10 Years (10 min Interval + 24 Triggers per Day) NFC Enabled Sensor Type: Cable Cable Length: 3.0m (Customizable) US\$3.00 dollars for one meter extension cable.	IP67		Trigger Condition: When Liquid Level Reaches 5mm Temperature: -30°C ~ 70°C Humidity: 0% ~ 100% RH	US\$63.00	US\$144.00	US\$96.00

Membrane Leakage Detection Sensor								
Picture	Model	Description	Ingress Protection	Communication	Measuring Range	Standard Price+	MSRP	MAP
	EM300-MLD-915M	1 * 4000mAh Li-SOCL2 Battery (Extendable to 2 Batteries) (Optional) Battery Life: Up to 10 Years (One hour Leakage per Day, 25°C) NFC Enabled Advanced Features: Milesight D2D Controller Cable Length: 1.0m	IP67	LoRaWAN™	Liquid Type: Conductive Liquid Trigger Media: 400 * 400 * 0.25 mm Printed Leakage-Detecting Film (Customizable) Trigger Condition: Soaking Liquid Length > 1.5 cm	US\$55.00	US\$126.00	US\$84.00
Remark: Additional US\$3.00 dollars required for an extra one 4000mAh Li-SOCL2 battery.								
Indoor Parking Guidance Camera								
Picture	Model	Description	Resolution	Lens	Field of View	Standard Price+	MSRP	MAP
	PM3322-E (1/2.8")	AI Based Occupancy / Parking Detection Supports Indicator Flashing and Multi-color Customizable Indicator Attributes Identification: License Plate, Plate Color, Vehicle Type, Vehicle Color Parking Occupancy Detection Accuracy≥99.9% LPR Accuracy>98% Attribute Recognition Accuracy>95% Supports Indicator Flashing Multi Port: RS485 + Audio Out * 1 + DC 12V + Ethernet Port * 2	3MP 2048*1536	Fixed Lens 2.8mm*2 @F1.6	H106°/D127° /V56°	US\$376.00	US\$1,026.00	US\$546.00
			Lens Angle Adjustment	LED Indicator	Parking Detection			
			Pan: 0° to 60° Tilt: 0° to 30°	Red (all occupied) Green(available) Blue(available for special parking)	Up to 6 Parking Spaces			
Remark: ~915M* / ~868M* / ~470M* in the model refers to different LoRaWAN Frequency in option for different countries / regions, (e.g.) ~915M*: KR920 / AS923 / AU915 / US915 ~868M*: IN865 / EU868 / RU864 ~470M*: CN470								
Smart Current Transformer								
Picture	Model	Description	Communication	Measurement	Standard Price+	MSRP	MAP	
	CT101-915M	Power Supply: Induced Current Power Supply Report the RMS Current and Accumulated Current Data by Minutes High Measuring Accuracy with a Sampling Frequency of up to 3.3 kHz Self-powered, Free from Batteries or External Wires Utilize a Sampling Rate of up to 1s for Real-time Monitoring and Quick Alarm Response	LoRaWAN™	Detection Parameter: RMS Current Working Frequency: 50~60 Hz Input current range: CT101: 1A ~ 100A CT103: 2A ~ 250A Operating Temperature: -20°C ~ +70°C Storage Temperature: -25°C ~ +80°C Accuracy: ± 1 % Resolution: 1 mA	US\$55.00	US\$126.00	US\$84.00	
	CT103-915M	Support Flexible Detachable Design Support to Connect to a Temperature Sensor via USB for Cable Temperature Measurement Equipped with LED Indicator to Indicate Working Status and Alarms Compliant with Standard LoRaWAN® Gateways and Network Servers IP30 Rated		US\$63.00	US\$144.00	US\$96.00		
Smart Current Transformer								
Picture	Model	Description	Communication	Measurement	Standard Price+	MSRP	MAP	
	CT105-915M	Power Supply: Induced Current Power Supply Report the RMS Current and Accumulated Current Data by Minutes High Measuring Accuracy with a Sampling Frequency of up to 3.3 kHz Self-powered, Free from Batteries or External Wires Utilize a Sampling Rate of up to 1s for Real-time Monitoring and Quick Alarm Response Support External Wire Temperature Sensor for Cable Temperature Measurement Equipped with LED Indicator to Indicate Working Status and Alarms Compliant with Standard LoRaWAN® Gateways and Network Servers IP30 Rated	LoRaWAN™	Detection Parameter: RMS Current Working Frequency: 50~60 Hz Input current range: CT105: 8A ~ 500A Operating Temperature: -20°C ~ +70°C Storage Temperature: -25°C ~ +80°C Accuracy: ± 1 % Resolution: 1 mA	US\$72.00	US\$165.00	US\$110.00	
Smart Current Transformer								
Picture	Model	Description	Communication	Measurement	Standard Price+	MSRP	MAP	
	CT303-915M	Power Supply: Induced Current Power Supply Report the RMS Current and Accumulated Current Data by Minutes High Measuring Accuracy with a Sampling Frequency of up to 3.3 kHz Self-powered, Free from Batteries or External Wires Utilize a Sampling Rate of up to 1s for Real-time Monitoring and Quick Alarm Response Support External Wire Temperature Sensor for Cable Temperature Measurement Equipped with LED Indicator to Indicate Working Status and Alarms Enable Simultaneous Detection of Three Phases Compliant with Standard LoRaWAN® Gateways and Network Servers IP30 Rated	LoRaWAN™	Working Frequency: 50~60 Hz Maximum Input current: CT303: 8A ~ 300A Operating Temperature: Host: -20°C ~ +70°C Probe: -40 ~ 55°C Storage Temperature: Host: -25°C ~ +80°C Probe: -40 ~ 55°C Accuracy: ± 1 % Resolution: 1 mA	US\$85.00	US\$204.00	US\$136.00	
Smart Current Transformer								
Picture	Model	Description	Communication	Measurement	Standard Price+	MSRP	MAP	
	CT305-915M	Power Supply: Induced Current Power Supply Report the RMS Current and Accumulated Current Data by Minutes High Measuring Accuracy with a Sampling Frequency of up to 3.3 kHz Self-powered, Free from Batteries or External Wires Utilize a Sampling Rate of up to 1s for Real-time Monitoring and Quick Alarm Response Support External Wire Temperature Sensor for Cable Temperature Measurement	LoRaWAN™	Working Frequency: 50~60 Hz Maximum Input current: CT305: 30A ~ 500A CT310: 60A ~ 1000A Operating Temperature: Host: -20°C ~ +70°C Probe: -40 ~ 55°C Storage Temperature: Host: -25°C ~ +80°C Probe: -40 ~ 55°C Accuracy: ± 1 % Resolution: 1 mA	US\$137.00	US\$315.00	US\$210.00	
	CT310-915M	Equipped with LED Indicator to Indicate Working Status and Alarms Enable Simultaneous Detection of Three Phases Compliant with Standard LoRaWAN® Gateways and Network Servers IP30 Rated			US\$215.00	US\$495.00	US\$330.00	

Smart Radiator Thermostat								
Picture	Model	Description	Communication	Measuring Range	Standard Price+	MSRP	MAP	
	WT101-915M	2 * 1.5V Li-FeS2 AA Replaceable Batteries Battery Life: Around 5 Years (10 min Report Interval, 25°C) Control Temperature by Regulating the Flow of Heat Adjust the Room Temperature Automatically and Manually with a Time-controlled Regulation Precise and Flexible Control for Efficient Energy Savings Up to 16 Heating Plans within 1 Pre-set Date Period Built-in Temperature Sensor, Enabling Environmental Detection and Accurate Control Multiple Adapter Options Support Open-window Detection and Freeze Protection Child Lock and Theft-detering Collar Compatible with Milesight IoT Cloud IP30 Rated		Operating Temperature: -20°C ~ +60°C Storage Temperature: -40°C ~ +70°C (Without Batteries) Relative Humidity: 0% ~ 95% (Non-condensing)	US\$53.00	US\$120.00	US\$80.00	
M30 X 1.5 mm Valve Adapter Kits (Applicable to WT101)								
Picture	Model	Description			Standard Price+	MSRP	MAP	
	TRA3015	A set of Valve Adapters Contains Five Models: 1 * CTH 28mm Valve Adapters (Comes with Three Lengths of Taper Rods) 1 * Giacomini 22.6mm Valve Adapters 1 * Danfoss RAVL 26mm Valve Adapters 1 * Danfoss RAV 34mm Valve Adapters 1 * Danfoss RA 23mm Valve Adapters			US\$6.00	US\$15.00	US\$10.00	
Smart Thermostat								
Picture	Model	Description	Communication	Measuring Range	Standard Price+	MSRP	MAP	
	WT201-915M	Support Most 24VAC HVAC System, Such as Heat Pump, PTAC, Boiler etc Support Temp.&Humi. Monitoring Support Intuitive 4.2-inch Display Support Remote & Local Control Support Dehumidification via Temp. control or Fan Control Support 4 Temperature Modes and 3 Fan Modes for Flexible Support 4 Working Modes and Allow Up to 64 Schedules for Each Mode Built-in Temperature and humidity Sensor, Enabling Real-time Monitoring and Threshold Alarm Store Locally 1000 Records and Support Retransmission Advanced Features: Milesight D2D Controller Compatible with Milesight IoT Cloud IP30 Rated		Operating Temperature: -4°F ~ 140°F (-20°C ~ 60°C) Relative Humidity: 0% ~ 95% (Non-condensing)	US\$85.00	US\$195.00	US\$130.00	
Smart Fan Coil Thermostat								
Picture	Model	Description	Communication	Measuring Range	Standard Price+	MSRP	MAP	
	WT301-915M	Power Supply: 95~240 VAC, 50~60HZ Adjust the Room Temperature Automatically and Manually with a Time-controlled Regulation Applicable for Two Pipes and 3-Speed Fan Coil System, Compatible with On/Off Relay (WT301) or 0-10V (WT302) Valve Control 5+1+1 Six Periods Programmable Maximize Comfort and Economy High Accuracy of 0.5°C for Temperature Regulation, Enabling Precise Control of Indoor Temperature Levels		Set Temperature Range: 5°C ~ 35°C Display Temperature: +5°C ~ +99°C Operating Temperature: 0°C ~ +45°C Storage Temperature: -5°C ~ +45°C Relative Humidity: 5 ~ 95% (Non-condensing) Power Consumption: <1.5W	US\$63.00	US\$144.00	US\$96.00	
	WT302-915M	Adopts an LCD Screen with Four-color LED and Capacitive Touch Buttons, Providing a Better Interactive Experience With a 12cm Ultra-thin Embedded Panel and a Sleek, Frameless Design, With Clock Display Function Equips with External NTC Sensor Signal Input and Keypad Switch Input Highly Adapt to Different Scenarios with 86mm Hidden Box and European 60mm Round Box IP20 Rated			US\$65.00	US\$150.00	US\$100.00	
	WT303-915M	Applicable for 2-pipe and 4-pipe FCUs with 3-Speed fan coil system Compatible with On/Off relay (WT303) or 0-10V (WT304) valve control Supports intuitive 2.7-inch display, allowing for showing temperature/humidity and status of the room clearly Equipped with an external NTC sensor signal input and a dry contact input for keypad/magnetswitches		Temperature Control Range 5°C ~ 35°C Temperature Range: -20°C ~ 60°C Humidity Range: 0% - 100% RH Operating Temperature -20°C ~ 60°C (E-ink Screen: 0°C ~ 40°C) Relative Humidity: 0 ~ 95% (Non-condensing)	US\$79.00	US\$180.00	US\$120.00	
	WT304-915M	Adjust the room temperature manually or automatically Supports adding 8 plans and allow up to 16 schedules for each plan, ensuring various control needs and energy savings Supports open-window detection and freeze protection Supports Milesight D2D protocol to enable ultra-low latency control without gateway IP20 Rated			US\$79.00	US\$180.00	US\$120.00	
Remark: *-915M" / *-868M" / *-470M" in the model refers to different LoRaWAN Frequency in option for different countries / regions, (e.g.) *-915M": KR920 / AS923 / AU915 / US915 *-868M": IN865 / EU868 / RU864 *-470M": CN470								
Environment Monitoring Sensor								
Temperature & Humidity Sensor								
Picture	Model	Description	Ingress Protection	Communication	Measuring Range	Standard Price+	MSRP	MAP
	EM300-TH-915M	1 * 4000mAh Li-SOCL2 Battery (Extendable to 2 Batteries) (Optional) Battery Life: 10 Years (10 min Interval) NFC Enabled	IP67		Temperature: -30°C ~ 70°C Humidity: 0% ~ 100% RH	US\$35.00	US\$78.00	US\$52.00

Temperature & Humidity Sensor								
Picture	Model	Description	Ingress Protection	Communication	Measuring Range	Standard Price+	MSRP	MAP
	EM320-TH-915M	2 * 2700mAh ER14505 Li-SOCL2 Batteries Battery Life: Over 10 years (10 min Interval with Data Retransmission disabled, 25°C) NFC Enabled Store Locally 3000 Historical Records Support Retransmission to Prevent Data Loss Material: PC + ABS (Food-Grade)	IP67		Temperature: -30°C ~ 60°C Humidity: 0% ~ 100% RH Installation: Standard Version: Wall Mounting Magnet Version: Magnetic Adsorption	US\$37.00	US\$84.00	US\$56.00
	EM320-TH-915M PN: Magnet							
Remark: "-915M" / "-868M" / "-470M" in the model refers to different LoRaWAN Frequency in option for different countries / regions, (e.g.) "-915M": KR920 / AS923 / AU915 / US915 "-868M": IN865 / EU868 / RU864 "-470M": CN470								
Temperature & Humidity Sensor with Sensor Shelter Kit								
Picture	Model	Description of Sensor Shelter Kit	Features of Sensor Shelter Kit		Standard Price+	MSRP	MAP	
	EM320TH+SS11	Multi-Layer Radiant Protection Shield with Louvered Enclosures Effectively Prevent Direct Sunlight and Ground Reflection from Affecting the Internal Sensors of Instruments High Reflectivity/ Low Thermal Conductivity/ UV Resistance	Radiation-resistant ABS Engineering Plastic & Stainless Steel Screws Operating Temperature: -40°C ~ 75°C Thermal Insulation Discoloration Resistance Corrosion Resistance		US\$110.00	US\$255.00	US\$170.00	
Insertion Temperature Sensor								
Picture	Model	Description	Communication	Measurement	Standard Price+	MSRP	MAP	
	TS101-915M (1 Piece)	1 * 4000mAh ER18505 Li-SOCI2 Replaceable Battery Battery Life: 10 Years (1 Hour Report Interval, 25°C) Adopt Food-grade Stainless-steel Probe and Shell Material Store up to 1200 sets of Data Locally NFC Enabled IP67 and IK10 (Transceiver) Rated Advanced Features: Data Storage / Data Retransmission/ Data Retrievability/ Abrupt Temperature Change Alarm		Measuring Range: -30°C ~ 70°C Accuracy: ±0.5°C Resolution: 0.1°C	US\$65.00	US\$150.00	US\$100.00	
	TS101-915M (2 Pieces)	US\$125.00			US\$288.00	US\$192.00		
Temperature Sensor								
Picture	Model	Description	Communication	Measurement	Standard Price+	MSRP	MAP	
	TS201-915M	1 * 2700 mAh ER14505 Li-SOCL2 Battery Battery Life: Around 3 Years (25°C, 10 min Interval) Provide Highly Accurate and Stable DS18B20 Temperature Sensor Probe with High-resolution Temperature Probe is Detachable for Self-calibration Store Locally 2800 Records and Support Retransmission NFC Enabled IP67 Rated Advanced Features: Data Storage / Data Retransmission/ Data Retrievability/ Abrupt Temperature Change Alarm		Connector Type: 1 × 5-Pin M12 A-Coded Male Connector Measuring Range: -40°C ~ 125°C Accuracy: ± 0.5°C(-10°C ~ 85°C), ± 2°C(-40°C ~ -10°C, 85°C ~ 125°C) Operating Temperature: TS201 Device: -30°C ~ 55°C (-22°F ~ 140°F) Sensor Cable: -40°C ~ 125°C (-40°F ~ 257°F) Relative Humidity: 0% to 95% (Non-condensing)	US\$40.00	US\$90.00	US\$60.00	
	TS201-915M V2 PN:TH	1 * 2700 mAh ER14505 Li-SOCL2 Battery Battery Life: Around 3 Years (25°C, 10 min Interval) Provide Highly Accurate and Stable DS18B20 Temperature Sensor Probe with High-resolution Temperature Probe is Detachable for Self-calibration Store Locally 2800 Records and Support Retransmission NFC Enabled IP67 Rated Advanced Features: Data Storage / Data Retransmission/ Milesight D2D Controller(TH Version Only) Data Retrievability/ Abrupt Temperature Change Alarm Equipped with indicator to indicate device status and threshold alarms (TH Version Only)		Connector Type: 1 × 5-Pin M12 A-Coded Male Connector Measuring Range: -40°C ~ 125°C (-40°F ~ 257°F) Accuracy: Temperature Version: ± 0.5°C(-10°C ~ 85°C), ± 2°C(-40°C ~ -10°C, 85°C ~ 125°C) TH Version: ± 0.3°C(-40°C ~ 0°C) ± 0.2°C(0°C ~ 60°C) ± 0.5°C(60°C ~ 125°C) Operating Temperature: TS201 Device: -30°C ~ 55°C (-22°F ~ 131°F) Relative Humidity: 0% to 95% (Non-condensing)	US\$47.00	US\$105.00	US\$70.00	
Temperature Sensor								
Picture	Model	Description	Communication	Standard Price+	MSRP	MAP		
	TS301-915M	Type-C Port Simplified PDF Data Export 2 * 4000mAh ER18505 Li-SOCI2 Replaceable Battery Battery Life: Around 3 Years (10 min Interval, 25°C) Single-channel Version A-class / B-class / Food-grade Temperature Probes and a Maganetic Sensor for Options 3 Wire Connection for High-precision Detection Segment Code LCD Screen / Smart Display Compatible with HACCP NFC Enabled IP65 Rated		US\$57.00	US\$129.00	US\$86.00		
	TS302-915M	Type-C Port Simplified PDF Data Export 2 * 4000mAh ER18505 Li-SOCI2 Replaceable Battery Battery Life: Around 3 Years (10 min Interval, 25°C) Dual-channel Version A-class / B-class / Food-grade Temperature Probes and a Maganetic Sensor for Options 3 Wire Connection for High-precision Detection Segment Code LCD Soreen / Smart Display Compatible with HACCP NFC Enabled IP65 Rated		US\$64.00	US\$147.00	US\$98.00		

Magnetic Contact Switch Sensor (Applicable to TS30X)							
Picture	Model	Description		Standard Price+	MSRP	MAP	
	SS21 PN: PN03-150	Detecting Open / Close Status of Objects Cable length: 1.5m		US\$7.00	US\$18.00	US\$12.00	
Temperature and Humidity Sensor							
Picture	Model	Description	Communication	Measurement	Standard Price+	MSRP	MAP
	TS601-L0DEU	Power Supply: 2×3500mAh ER18505MLi-SOCL Batteries Support Obtaining the Current Device Location Based On The Base Station Signal Support Compartment/CargoBox Opening Detection to Avoid Theft Supports Tilt Detection. Abnormal Tilt will Trigger An Alarm Support Set to Flight Mode, Meet Aviation Safety Requirements. Support OTA Remote Upgrade Operation IP67 Rated		Temperature: Operating Principle: Digital CMOSens® technology (MEMS) Range: -40°C to +125°C Accuracy: ± 0.3°C (-40°C to 0°C) ± 0.2°C (0°C to 65°C) ± 0.5°C (65°C to 125°C) Humidity: Operating Principle: Digital CMOSens® technology (MEMS) Range: 0% ~ 100% RH Accuracy: ± 2% (0% ~ 50% RH) ± 1.8% (50% ~ 100% RH)	US\$65.00	US\$150.00	US\$100.00
	TS602-L0DEU	Power Supply: 2×3500mAh ER18505MLi-SOCL Batteries Support Obtaining the Current Device Location Based On The Base Station Signal Support Compartment/CargoBox Opening Detection to Avoid Theft Supports Tilt Detection. Abnormal Tilt will Trigger An Alarm Support Set to Flight Mode, Meet Aviation Safety Requirements. Support OTA Remote Upgrade Operation Features High Resolution OLED Display, Enabling Intuitive Data Reading. Supports Optional Various Types of High-accuracy Temperature and Humidity Probes, Including TH, DS18B20, and PT100. The TH and DS18B20 Probes Support ID reporting, Detachable for Self-calibration. IP67 Rated		Temperature Range: B05-125-200: -40°C~125°C AF10-125-150: -40°C~125°C A05-500-150: -50°C~500°C A03-050-150: -200°C~50°C TH: -40°C ~ 125°C DS18B20: -40°C ~ 125°C Accuracy: B05-125-200: ± 0.5°C (-40°C~40°C), ± 1°C (40°C~125°C) AF10-125-150: ± 0.4°C A05-500-150: ± 0.5°C A03-050-150: ± 0.5°C (-175°C~50°C), ± 0.55°C (-200°C~-175°C) TH: ± 0.3°C ± 0.3°C (-40°C~0°C), ± 0.2°C (0°C~60°C) ± 0.5°C (60°C~125°C) DS18B20: ± 0.5°C (-10°C~85°C), ± 2°C (-40°C~-10°C, 85°C~125°C) Humidity Range: 0% ~ 100% RH Accuracy: ± 2%	US\$79.00	US\$180.00	US\$120.00
PT100 Probe (Applicable to TS30X&TS602)							
Picture	Model	Description	Measurement	Standard Price+	MSRP	MAP	
	SP11 PN: B05-125-200	B-class Temperature Probe Probe Length: 5cm Cable Material: PVC IP67 Rated	Range: -40 ~ 125°C; Accuracy: ± 0.5°C (-40°C~40°C) ± 1°C (40°C~125°C) Resolution: 0.1°C	US\$6.00	US\$15.00	US\$10.00	
	SP11 PN: AF10-125-150	Food-grade Temperature Probe Probe length: 10cm Cable Material: Food Grade Silicone IP67 Rated	Range: -40 ~ 125°C; Accuracy: ± 0.4°C Resolutions 0.1°C	US\$11.00	US\$30.00	US\$20.00	
	SP11 PN: A05-500-150	A-class Temperature Probe Probe length: 3cm Cable Material: Teflon IP30 Rated	Range: -50 ~ 500°C; Accuracy: ± 0.5°C Resolutions 0.1°C	US\$14.00	US\$36.00	US\$24.00	
	SP11 PN: A03-050-150	A-class Temperature Probe Probe length: 3cm Cable Material: Teflon IP67 Rated	Range: -200 ~ 50°C; Accuracy: ± 0.5°C Resolutions 0.1°C	US\$11.00	US\$30.00	US\$20.00	
DS18B20 Probe (Applicable to TS602)							
Picture	Model	Description	Measurement	Standard Price+	MSRP	MAP	
	SP12-125-150	Detachable probe Probe length: 5cm Probe Material: 316 Stainless Steel Cable Material: PVC IP67 Rated	Range: -40°C~125°C Accuracy: ± 0.5°C (-10°C~85°C), ± 2°C (-40°C~-10°C, 85°C~125°C)	US\$6.00	US\$15.00	US\$10.00	

TH Probe (Applicable to TS602)								
Picture	Model	Description			Measurement	Standard Price+	MSRP	MAP
	SP13-125-150	Detachable probe Probe length: 5cm Probe Material: 304 Stainless Steel Cable Material: PVC IP67 Rated			Range : -40~ 125°C Accuracy: ± 0.3°C (-40°C~0°C), ± 0.2°C (0°C~60°C) ± 0.5°C (60°C~125°C) Humidity Range: 0%~100% RH Accuracy: ± 2%	US\$11.00	US\$30.00	US\$20.00
Tilt Sensor								
Picture	Model	Description	Ingress Protection	Communication	Measuring Range	Standard Price+	MSRP	MAP
	EM320-TILT-915M	2 * 2700mAh ER14505 Li-SOCl2 Batteries Battery Life: Over 3 Years (10min Reporting Interval, SF10) Support 36 Groups of Threshold Settings Support Setting Relative Initial Surface for Trigger IP67 Rated NFC Enabled	IP67		Measurement Axis: X, Y, Z Measurement Range: -90° ~ 90°	US\$55.00	US\$126.00	US\$84.00
Remark: ~915M" / ~868M" / ~470M" in the model refers to different LoRaWAN Frequency in option for different countries / regions, (e.g.) ~915M": KR920 / AS923 / AU915 / US915 ~868M": IN865 / EU868 / RU864 ~470M": CN470								
ToF Laser Distance Sensor								
Picture	Model	Description	Ingress Protection	Communication	Measuring Range	Standard Price+	MSRP	MAP
	EM400-TLD-915M	2 * 9000mAh ER26500 Li-SOCL2 Batteries Battery Life: Standard Mode: Around 10 Years (10 min Interval, 25°C) Bin Mode: Around 10 years (20 min Interval, 25°C) NFC Enabled 2-350 cm Wide Detection Range with Extremely Short Blind Zone Equipped with NTC Temperature Sensor for the Detection and Alarm of Trash Burning NFC Enabled Material: PC + ABS	IP67		ToF FoV: 27°C Detection Range: 2 ~ 350 cm Resolution: 1 mm Status: Normal / Tilt Flame Retardant Grade: V0	US\$76.00	US\$174.00	US\$116.00
	EM400-TLD-N03GL	2 * 9000mAh ER26500 Li-SOCL2 Batteries Battery Life: TCP / UDP: Around 10 Years MQTT / AWS: Around 5 Years (4 Times Report per Day, per Report Includes 12 Packages with 30-min Collection Interval, 25°C) 2-350 cm Wide Detection Range with Extremely Short Blind Zone Equipped with NTC Temperature Sensor for the Detection and Alarm of Trash Burning Equipped with GNSS Positioning for Tracking Support Cumulative Number Report Function for Power Saving NFC Enabled Material: PC + ABS	IP67		ToF FoV: 27°C Detection Range: 2 ~ 350 cm Resolution: 1 mm Status: Normal / Tilt Flame Retardant Grade: V0 GNSS Positioning Parameters: Longitude / Latitude Resolution: 0.000001	US\$88.00	US\$204.00	US\$136.00
Multifunctional Ultrasonic Distance/Level Sensor								
Picture	Model	Description	Ingress Protection	Communication	Measuring Range	Standard Price+	MSRP	MAP
	EM400-MUD-915M PN: B045-2	2 * 9000mAh ER26500 Li-SOCL2 Batteries Battery Life: Standard Mode: Over 10 Years (10 min Interval, 25°C) Bin Mode: Over 10 Years (20 min Interval, 25°C) Parking Lot Mode: 5 Years (12 Triggers per Day, 25°C) 3-450 cm Wide Detection Range with Small Blind Zone Equipped with NTC Temperature Sensor for the Detection and Alarm of Trash Burning Equipped with Three Pre-set Modes for Different Applications: Standard Mode / Bin Mode / Packing Lot Mode NFC Enabled Material: PC + ABS	IP67		Detection Range: 3 ~ 450 cm Resolution: 1 mm Status: Normal / Tilt Flame Retardant Grade: V0	US\$76.00	US\$174.00	US\$116.00
	EM400-MUD-N03GL PN: B045-2	2 * 9000mAh ER26500 Li-SOCL2 Batteries Battery Life: TCP / UDP: Around 10 Years MQTT / AWS: Around 5 Years (4 Times Report per Day, per Report Includes 12 Packages with 30-min Collection Interval, 25°C) 3-450 cm Wide Detection Range with Small Blind Zone Equipped with NTC Temperature Sensor for the Detection and Alarm of Trash Burning Equipped with Two Pre-set Modes for Different Applications: Standard Mode / Bin Mode Equipped with GNSS Positioning for Tracking Support Cumulative Number Report Function for Power Saving NFC Enabled Material: PC + ABS	IP67		Detection Range: 3 ~ 450 cm Resolution: 1 mm Status: Normal / Tilt Flame Retardant Grade: V0 GNSS Positioning Parameters: Longitude / Latitude Resolution: 0.000001	US\$88.00	US\$204.00	US\$136.00

Ultrasonic Distance/Level Sensor								
Picture	Model	Description	Ingress Protection	Communication	Range & Accuracy	Standard Price+	MSRP	MAP
	EM400-UDL-915M PN: W050	2 * 9000mAh ER26500 Li-SOCL2 Batteries Battery Life: Over 10 Years (10 min Interval, 25°C) Selective Probes Vary from 25 to 1000 cm for Multiple Applications Equipped with NTC Temperature Sensor for the Detection and Alarm of Burning	IP67		0.3 ~ 5 m ± 1% FS (- 30°C ~ 65°C)	US\$273.00	US\$630.00	US\$420.00
	EM400-UDL-915M PN: W100				0.5 ~ 10 m ± 1% FS (- 30°C ~ 65°C)	US\$292.00	US\$675.00	US\$450.00
	EM400-UDL-915M PN: C050	NFC Enabled Resolution: 1 mm Material: PC + ABS Flame Retardant Grade: V0	IP67		0.25 ~ 5 m ± (1 + 0.3% * S) cm, S = Distance (- 15°C ~ 60°C)	US\$169.00	US\$390.00	US\$260.00
	EM400-UDL-915M PN: C100				0.25 ~ 10 m ± (1 + 0.3% * S) cm, S = Distance (- 15°C ~ 60°C)	US\$169.00	US\$390.00	US\$260.00
	EM400-UDL-N03GL PN: W050	2 * 9000mAh ER26500 Li-SOCL2 Batteries Battery Life: TCP / UDP: Around 10 Years MQTT / AWS: Around 5 Years (4 Times Report per Day, per Report Includes 12 Packages with 30-min Collection Interval, 25°C)	IP67		0.3 ~ 5 m ± 1% FS (- 30°C ~ 65°C)	US\$299.00	US\$690.00	US\$460.00
	EM400-UDL-N03GL PN: W100				0.5 ~ 10 m ± 1% FS (- 30°C ~ 65°C)	US\$318.00	US\$735.00	US\$490.00
	EM400-UDL-N03GL PN: C050	NFC Enabled Resolution: 1 mm Material: PC + ABS Flame Retardant Grade: V0	IP67		0.25 ~ 5 m ± (1 + 0.3% * S) cm, S = Distance (- 15°C ~ 60°C)	US\$195.00	US\$450.00	US\$300.00
	EM400-UDL-N03GL PN: C100				0.25 ~ 10 m ± (1 + 0.3% * S) cm, S = Distance (- 15°C ~ 60°C)	US\$195.00	US\$450.00	US\$300.00

Radar Distance/Level Sensor								
Picture	Model	Description	Ingress Protection	Communication	Measurement	Standard Price+	MSRP	MAP
	EM410-RDL-915M	1 * 19000mAh ER34615 Li-SOCL2 Battery Battery Life: LoRaWAN® Version: Around 7 Years Cellular Version: Around 5 Years (15-min Collection Interval+1440-report Interval, 25°C)	IP68		Technology: Millimeter Wave Radar Radar frequency band: 60GHz Target: Liquids or Smooth Surface Solid Detection Angle: 8° Range & Accuracy: 0.3m ~ 12m (Up to ± 2mm) Operating Temperature: -40°C ~ 70°C@LoRaWAN® Version -35°C ~ 70°C@Cellular Version	US\$195.00	US\$450.00	US\$300.00
	EM410-RDL-915M-EA	Non- invasive Liquid Level Monitoring Support External Antenna or Internal Antenna Versions Built-in 3-axis Accelerometer Sensor to Monitor Device Tilt Status Distance Threshold Alarm / Distance Change Alarm / Blind Zone Alarm / Radar-echo Curve / One-click Diagnostic Applications: Sewage well Mode / Rainwater well Mode / General Mode Store up to 4,000 Historical Records Locally and Support Retransmission				US\$202.00	US\$465.00	US\$310.00
	EM410-RDL-L0CEU	Support cumulative number report function for power saving (For Cellular Version)				US\$215.00	US\$495.00	US\$330.00
	EM410-RDL-L0CEU PN: EA	NFC and Bluetooth Enabled Material: PVDF Resolution: 1mm				US\$220.00	US\$510.00	US\$340.00

Remark:
 -915M / *-868M* / *-470M* in the model refers to different LoRaWAN Frequency in option for different countries / regions, (e.g.)
 -915M: KR920 / AS923 / AU915 / US915 *-868M*: IN865 / EU868 / RU864 *-470M*: CN470

Ultrasonic Distance/Level Sensor								
Picture	Model	Description	Ingress Protection	Communication	Range & Accuracy	Standard Price+	MSRP	MAP
	EM500-UDL-915M PN: W050	1 * 19000mAh Li-SOCL2 Battery Battery Life: 10 Years (10 min Interval) Resolution: 1 mm NFC Enabled	IP67		0.3 ~ 5 m ± 1% FS	US\$279.00	US\$645.00	US\$430.00
	EM500-UDL-915M PN: W100				0.5 ~ 10 m ± 1% FS	US\$299.00	US\$690.00	US\$460.00
	EM500-UDL-915M PN: C050				0.25 ~ 5 m ± (1 + 0.3% * S) cm, S = Distance	US\$175.00	US\$405.00	US\$270.00
	EM500-UDL-915M PN: C100				0.25 ~ 8 m ± (1 + 0.3% * S) cm, S = Distance	US\$175.00	US\$405.00	US\$270.00

Industrial Temperature Sensor								
Picture	Model	Description	Ingress Protection	Communication	Measuring Range	Standard Price+	MSRP	MAP
	EM500-PT100-915M PN: T050	1 * 19000mAh Li-SOCL2 Battery Battery Life: 10 Years (10 min Interval) Resolution: 0.1°C NFC Enabled Measuring Range: Customizable from -200 °C ~ 800 °C Cable Length: 1.5m (Customizable) US\$3.00 dollars for one meter extension cable.	Transceiver: IP67 Sensor: IP30		-200°C ~ 50°C	US\$110.00	US\$255.00	US\$170.00
	EM500-PT100-915M PN: T200		Transceiver: IP67 Sensor: IP68		-50°C ~ 200°C	US\$102.00	US\$234.00	US\$156.00
	EM500-PT100-915M PN: T500		Transceiver: IP67 Sensor: IP30		-50°C ~ 500°C	US\$110.00	US\$255.00	US\$170.00
	EM500-PT100-915M PN: T800		Transceiver: IP67 Sensor: IP30		-50°C ~ 800°C	US\$163.00	US\$375.00	US\$250.00
CO2 Sensor (4 in 1)								
Picture	Model	Description	Ingress Protection	Communication	Measuring Range	Standard Price+	MSRP	MAP
	EM500-CO2-915M	1 * 19000mAh Li-SOCL2 Battery Battery Life: 10 Years (10 min Interval) Resolution: 1 ppm NFC Enabled	Transceiver: IP67 Sensor: IP65		CO2: 400 ~ 5000 ppm Temperature: -30°C ~ 70°C Humidity: 0% ~ 100% RH Barometric Pressure: 300 ~ 1100 hPa (-40°C ~ 85°C)	US\$157.00	US\$360.00	US\$240.00
Submersible Water Level Sensor								
Picture	Model	Description	Ingress Protection	Communication	Range & Accuracy	Standard Price+	MSRP	MAP
	EM500-SWL-915M PN: L003-4846W	1 * 19000mAh Li-SOCL2 Battery Battery Life: 10 Years (10 min Interval) Resolution: 0.01 m NFC Enabled Measuring Range: 0 ~ 3m / 5m / 10m (H2O) Cable Length: At least 1 ~ 1.5m longer than measuring range (Customizable) US\$3.00 dollars for one meter extension cable. Additional inquiry needed when measuring range >10m.	Transceiver: IP67 Sensor: IP68		3m ± 0.5% FS	US\$218.00	US\$504.00	US\$336.00
	EM500-SWL-915M PN: L005-4846W				5m ± 0.5% FS	US\$220.00	US\$510.00	US\$340.00
	EM500-SWL-915M PN: L010-4846W				10m ± 0.5% FS	US\$237.00	US\$546.00	US\$364.00
Pipe Pressure Sensor								
Picture	Model	Description	Ingress Protection	Communication	Range & Accuracy	Standard Price+	MSRP	MAP
	EM500-PP-915M PN: G1/2M-4842	1 * 19000mAh Li-SOCL2 Battery Battery Life: 10 Years (10 min Interval) Resolution: 1 kPa (0.01 Bar) NFC Enabled Cable Length: 1.5m (Customizable) US\$3.00 dollars for one meter extension cable.	Transceiver: IP67 Sensor: IP65		0 ~ 1600 kPa (16 Bar) ± 0.5% FS	US\$172.00	US\$396.00	US\$264.00
Light Sensor								
Picture	Model	Description	Ingress Protection	Communication	Measuring Range	Standard Price+	MSRP	MAP
	EM500-LGT-915M PN: RY	1 * 19000mAh Li-SOCL2 Battery Battery Life: 10 Years (10 min Interval) Resolution: 1 lux NFC Enabled Cable Length: 3m	Transceiver: IP67 Sensor: IP65		0 ~ 100000 lux	US\$137.00	US\$315.00	US\$210.00
Soil Moisture, Temperature and Electrical Conductivity Sensor								
Picture	Model	Description	Ingress Protection	Communication	Measuring Range	Standard Price+	MSRP	MAP
	EM500-SMTC-915M PN: MEC20	1 * 19000mAh Li-SOCL2 Battery Battery Life: 10 Years (10 min Interval) Resolution: 0.01% NFC Enabled Cable Length: 2m (Customizable) US\$3.00 dollars for one meter extension cable.	Transceiver: IP67 Sensor: IP68		Temperature: -40°C ~ 80°C Moisture: 0% ~ 100% RH Electrical Conductivity: 0 ~ 20000 µs/cm	US\$322.00	US\$744.00	US\$496.00

Bathroom Odor Detector							
Picture	Model	Description	Communication	Detection	Standard Price+	MSRP	MAP
	GS301-915M	4 * 4000mAh ER18505 Li-SOC2 Replaceable Batteries Battery Life: Around 3 Years (10 min Interval) Built-in Multiple Sensors Including NH3, H2S, Temperature and Humidity Equipped with Buzzer and LED Indicator to Indicate Threshold Alarms Support Milesight D2D Protocol Damp-proof Coating NFC Enabled	LoRaWAN	Detection Principle: Solid Polymer Electrochemical Detection Range: NH3: 0 ~ 10 ppm H2S: 0 ~ 5 ppm Accuracy: ± 5% (-40°C ~ 35°C) Resolution: 0.01 ppm Temperature: -40°C ~ 85°C Humidity: 0% ~ 100% RH	US\$305.00	US\$705.00	US\$470.00

Vape Detector							
Picture	Model	Description	Communication	Detection	Standard Price+	MSRP	MAP
	GS601-915M	5V/1A by Type-C Port Integrated with Multiple Sensors to Detect Vape, Smoke, TVOC, Temperature, Humidity, and PM Parameters Supports Anti-water Vapor Disturbance and Other Gas Interference Equipped with Buzzer and LED Indicator to Indicate Threshold Alarms Supports Setting the Buzzer Hiberate Time Equipped with a Vibration Sensor to Detect acts of Vandalism or Tampering NFC Enabled IP30 Rated	LoRaWAN	Detection Principle: Laser Scattering Detection Range: 0 ~ 100 Accuracy: ±10 Operating Temperature: -5°C ~ 45°C Humidity: 0 ~ 95% RH	US\$143.00	US\$330.00	US\$220.00

Remark:
 -915M / *-868M* / *-470M* in the model refers to different LoRaWAN Frequency in option for different countries / regions, (e.g.)
 -915M: KR920 / AS923 / AU915 / US915 *-868M*: IN865 / EU868 / RU864 *-470M*: CN470

IoT Weather Station							
Picture	Model	Description	Communication	Measuring Range	Standard Price+	MSRP	MAP
	WTS506-915M	Waterproof / UV-proof / Salt Spray Resistant Enclosure Store Locally more than 19,000 Historical Records Support Retransmission Solar Powered (15W, 1A) with 2 * 2550 mAh Chargeable Batteries backup Threshold Alarm Function NFC Enabled IP65 Rated Operating Temperature: -40°C ~ 85°C Material: Aluminium Alloy	LoRaWAN	Temperature: -40°C ~ 85°C ± 0.3°C Humidity: 0% ~ 100% RH Accuracy: ± 3% RH Wind Direction: 0° ~ 360° Accuracy: ± 3° Wind Speed: 0 ~ 60 m/s Accuracy: ± 0.3 m/s or ± 3% (Whichever is Greater) Barometric Pressure: 500 ~ 1100 hPa Accuracy: ± 0.5 hPa Rainfall: 0 ~ 1000 mm ± 0.5 mm (< 10 mm), ± 5 %(> 10 mm)	US\$1,942.00	US\$4,500.00	US\$3,000.00

Outdoor Asset Tracker							
Picture	Model	Description	Communication	Measurement	Standard Price+	MSRP	MAP
	AT101-915M	4 * 2700mAh ER14505 Li-SOC2 Replaceable Batteries Battery Life (25°C): Over 15 Years (Twice Daily Location Updates) Over 8 Years (Tenth Daily Location Updates) Over 4 Years (Hourly Location Updates) Equipped with High-accurate GNSS Positioning and Cooperate with Wi-Fi Positioning Built-in 3-axis Accelerometer Sensor to Monitor Device Tilt Status and Movement Equipped with NTC Temperature Sensor Enabling Environmental Detection NFC Enabled IP67 and IK09 Rated	LoRaWAN	GNSS Positioning Position Accuracy (CEP): < 5.0m (Direct Line of Sight) Resolution: Longitude / Latitude: 0.0001 Altitude: 1m Temperature Measuring Range: -40°C ~ 125°C Resolution: 0.1°C	US\$85.00	US\$195.00	US\$130.00

Remark:
 -915M / *-868M* / *-470M* in the model refers to different LoRaWAN Frequency in option for different countries / regions, (e.g.)
 -915M: KR920 / AS923 / AU915 / US915 *-868M*: IN865 / EU868 / RU864 *-470M*: CN470

IoT Controller

UC100 Series						
Picture	Model	Description/Interface	Communication	Standard Price+	MSRP	MAP
	UC100-915M	1 * RS485 Modbus RTU Supported Cost-Effective & Super-Tiny Size Harsh-Environment Resistance		US\$37.00	US\$78.00	US\$52.00
	UC100-915M-EA			US\$41.00	US\$87.00	US\$58.00
UC300 Series						
Picture	Model	Description/Interface	Communication	Standard Price+	MSRP	MAP
	UC300-L05EU	1 * RS232 + 1 * RS485 4 * Digital Input 2 * Digital Output 2 * 4 ~ 20 mA Analog Input 2 * 0 ~ 10 V Analog Input 2 * PT100 RTD Analog Input		US\$146.00	US\$315.00	US\$210.00
	UC300-915M			US\$97.00	US\$210.00	US\$140.00

Remark:
 915M/ *-868M*/ *-470M* in the model refers to different LoRaWAN Frequency in option for different countries / regions, (e.g.)
 -915M: KR920 / AS923 / AU915 / US915 4.28dBm *-868M*: IN865 / EU868 / RU864 4.52dBm *-470M*: CN470 0.87dBm
 -L04EU/ *-L04AU*/ *-L04AF*/ *-L08GL*/ *-L09NA* in the model refers to different 4G modules in option for different countries / regions, (e.g.)
 -EU for Europe and Asia and Africa *-AU* for South America and Australia *-AF* for North America and *-GL* for Stands for Worldwide, Except North America and *-NA* for North America

Sensing Camera

X1 Sensing Camera						
Picture	Model	Description	Specifications	Standard Price+	MSRP	MAP
	SC541 PN: 1020	Support Easy Configuration via Wireless Wi-Fi Connection Support Multi-type Picture-capturing Modes Depending on Time Interval / Scheduled Time / Alarm-in Settings / One External Button. Equip with One Advanced Supplement Light to Increase Light Level under Specific Conditions Smart Sleep-mode Logic and Low-power Consumption IP30 Rated	Resolution: 1920 * 1080 Pixels Field of View: 77°@PN: 1020 120°@PN: 0510 Focal Length: 4.8mm@PN: 1020 1.79mm@PN: 0510 Mounting Distance: 10 ~ 20 cm@PN: 1020 5 ~ 10 cm@PN: 0510 Storage: Store up to 40 pictures (About 3MB Flash) Power Supply: 5V / 1A by Type-C Port 2 * AA alkaline batteries Battery Life: Up to 2 Years (3 Captures per Day, Supplement Light Off, 25°C)	US\$55.00	US\$126.00	US\$84.00
	SC541 PN: 0510					

X1 Sensing Camera Wi-Fi Halow Version						
Picture	Model	Description	Specifications	Standard Price+	MSRP	MAP
	SC541-HL-915M PN: 1020	1 * 50 Ω SMB Female Connector 1 * Nano SIM (4FF) Support Easy Configuration via Wireless Wi-Fi Connection Support Multi-type Picture-capturing Modes Depending on Time Interval / Scheduled Time / Alarm-in Settings / One External Button. Equip with One Advanced Supplement Light to Increase Light Level under Specific Conditions Supports Both Wi-Fi and Wi-Fi HaLow Communication Versions to Meet Different Networking Requirements Smart Sleep-mode Logic and Lower Power Consumption Support Close Focus lens and Super Close Focus lens to Meet Different Close-range Capture Needs IP30 Rated	Resolution: 1920 * 1080 Pixels Field of View: 77°@PN: 1020 120°@PN: 0510 Focal Length: 4.8mm@PN: 1020 1.79mm@PN: 0510 Mounting Distance: 10 ~ 20 cm@PN: 1020 5 ~ 10 cm@PN: 0510 Storage: Store up to 40 pictures (About 3MB Flash) Power Supply: 5V / 1A by Type-C Port 2 * 3000mAh Li-Iron batteries Battery Life: Up to 3 Years (3 Captures per Day, Supplement Light Off, 25°C)	US\$92.00	US\$210.00	US\$140.00
	SC541-HL-915M PN: 0510					

Remark:
"-915M"/ "-868M"/ "-470M" in the model refers to different LoRaWAN Frequency in option for different countries / regions, (e.g.)
"-915M": KR920 / AS923 /AU915 /US915 "-868M": IN865 / EU868 / RU864 "-470M": CN470

X5 Sensing Camera						
Picture	Model	Description	Specifications	Standard Price+	MSRP	MAP
	SC311	4G / GPS / Bluetooth 5.3 Supported Support Easy Configuration via Wireless Wi-Fi Connection Support Day / Night / Auto Mode Support Multi-type Picture-capturing Modes Depending on Various Kinds of Triggering Sources: Radar & PIR / Temperature / Sound / Alarm-in Equip with One Advanced Infrared Supplement Light to Increase Light Level in Dark Environment Equipped with Different HD Camera Lens(4K/2MP) Provide All-in-one Camera Bracket and Rain Cover for More Simple Installation Option Support Multi-type Power Supply and Additional Solar Panel for Outdoor Application Smart Sleep-mode Logic and Low-power Consumption Equip with Heating Film for Protecting Battery in Low-temperature Environment IP66 Rated	Resolution: 1920 * 1080 Pixels@SC311 3840 * 2160 Pixels@SC312 Lens focus: 2.8mm Field of View: 100 ° Horizontal Capture Distance: Up to 10m 6m (Optimal) Nighttime Illumination Distance: Up to 10m Temperature: -20°C ~ 60°C	US\$285.00	US\$660.00	US\$440.00
	SC312			US\$299.00	US\$690.00	US\$460.00

Solar Panel Modules (Applicable to X5 Sensing Camera)					
Picture	Model	Description	Standard Price+	MSRP	MAP
	S45	Support Maximum Power 45W Solar Panels Operating Temperature: -40°C ~ 85°C IP67 Rated	US\$79.00	US\$180.00	US\$120.00

Remark:
"-915M"/ "-868M"/ "-470M" in the model refers to different LoRaWAN Frequency in option for different countries / regions, (e.g.)
"-915M": KR920 / AS923 /AU915 /US915 "-868M": IN865 / EU868 / RU864 "-470M": CN470

PoE Switch												
Picture	Model	PoE Ports	Uplink Ports	SFP Ports	Max Capacity	Single Port	Switching Capacity	Extend Mode	Features	Standard Price+	MSRP	MAP
	MS-S0204-EL	4 * 10/100Mbps	2 * 100Mbps	N/A	60W	30W	1.6Gbps	✓	PoE Standard: IEEE802.3af / at Port Lightning Protection: 4KV 8/20us Ingress Protection: IP30	US\$28.00	US\$75.00	US\$40.00
	MS-S0208-EL	8 * 10/100Mbps	2 * 100Mbps	N/A	120W	30W	2Gbps	✓		US\$44.00	US\$120.00	US\$64.00
	MS-S0208-GL	8 * 10/100Mbps	2 * 100Mbps	N/A	120W	30W	11.8Gbps	✓		US\$49.00	US\$132.00	US\$70.00
	MS-S0216-GL	16 * 10/100Mbps	2 * 100Mbps	N/A	200W	30W	14.8Gbps	✓		US\$127.00	US\$345.00	US\$184.00
	MS-S0224-GL	24 * 10/100Mbps	2 * 100Mbps	N/A	400W	30W	14.8Gbps	✓		US\$180.00	US\$489.00	US\$260.00
	MS-S0416-GF	16 * 10/100Mbps	2 * 100Mbps	2 * 1000Mbps	250W	30W	14.8Gbps			US\$165.00	US\$450.00	US\$240.00
	MS-S0424-GF	24 * 10/100Mbps	2 * 100Mbps	2 * 1000Mbps	400W	30W	14.8Gbps			US\$204.00	US\$555.00	US\$296.00

Milesight IoT Product Naming Convention



Industrial Cellular Router & 5G CPE & IoT Controller

UR32 – L 04 EU – G – P – W – RS485

①	②	③	④	⑤	⑥
① Model Name	② Cellular Network Type	③ Modem Manufacturer & Model	④ Operating Region	⑤ Function (for routers only)	⑥ RS485 (for UR32 only)
- UR32L - UR32 - UR35 - UR75 - UF51 - UC300	- L: 4G LTE 5: 5G	- EU: EMEA/South Korea/Thailand/India - AU: Latin America/Australia/New Zealand - AF: North America FirstNet - GL: Global		- G: GPS - P: PoE - W: Wi-Fi	Add RS-485 Serial Interface

LoRaWAN® Gateway

UG65 – L 04 EU – 915M – EA

①	②	③	④	⑤	⑥
① Model Name	② Cellular Network Type	③ Modem Manufacturer & Model	④ Operating Region	⑤ LoRaWAN® Module	⑥ External Antenna
- UG63 - UG65 - UG67	L: 4G LTE	- EU: EMEA/South Korea/Thailand/India - AU: Latin America/Australia/New Zealand - AF: North America FirstNet		470M: CN470 868M: RU864/IN865/EU868 915M: US915/AU915/KR920/AS923	

CoWork Series

LoRaWAN® AI Workplace Sensor

VS 1 2 1 – 915M

①	②	③	④
① Vision Sensor	② MegaPixel	③ Sub-series	④ LoRaWAN® Module

LoRaWAN® Smart Button

WS 10 1 – 915M

①	②	③
① Workplace Sensor	② Number of Buttons	③ LoRaWAN® Module

LoRaWAN® Smart Scene Panel

WS 1 5 6 – 915M

①	②	③	④
① Workplace Sensor	② Display 5: E-Ink Screen 3: PVC Sticker	③ Number of Buttons	④ LoRaWAN® Module

LoRaWAN® PIR & Light Sensor

WS 20 2 – 915M

①	②	③
① Workplace Sensor	② Number of Sensors	③ LoRaWAN® Module

LoRaWAN® Magnetic Contact Switch

WS 30 1 – 915M

①	②	③
① Workplace Sensor	② Sub-series	③ LoRaWAN® Module

LoRaWAN® Smart Portable Socket

WS 52 3 – 915M

①	②	③
① Workplace Sensor	② Number of Holes	③ LoRaWAN® Module

LoRaWAN® Sensor

EM500 – UDL – 915M

①	②	③
① Model Name	② Sensor Type	③ LoRaWAN® Module
- AM103 - AM103L - AM104 - AM107 - AM307 - AM319 - EM300 - EM310 - EM500	- UDL: Ultrasonic Distance/Level Sensor - SMTC/SMT: Soil Sensor - SWL: Submersible Water Level Sensor - LGT: Light Sensor - PT100: PT100 Temperature Sensor - CO₂: CO₂ Sensor - PP: Pipe Pressure Sensor - TH: Temperature & Humidity Sensor - MCS: Magnetic Contact Switch Sensor - SLD: Spot Leak Detection Sensor - ZLD: Zone Leak Detection Sensor	470M: CN470 868M: RU864/IN865/EU868 915M: US915/AU915/KR920/AS923

LoRaWAN® Controller

UC511 – DI – 915M

①	②	③
① Model Name	② Interface (For UC51x Only)	③ LoRaWAN® Module
- UC300 - UC501 - UC502 - UC511 - UC512	Digital Input (Pulse Counter)	470M: CN470 868M: RU864/IN865/EU868 915M: US915/AU915/KR920/AS923

Industrial PoE Switch

MS – S0 2 04 – E L MS – S0416 – G F

①	②	③	④	⑤	⑥
① Uplink Port and SFP Port	② Number of PoE Ports	③ Fast Uplink Port (10/100 Mbps)	④ Extend Mode	⑤ Gigabit Uplink Port (10/100/1000 Mbps)	⑥ Optical Fiber Port (SFP)
2: 2 × Uplink Ports 4: 2 × Uplink Ports + 2 × SFP Ports					