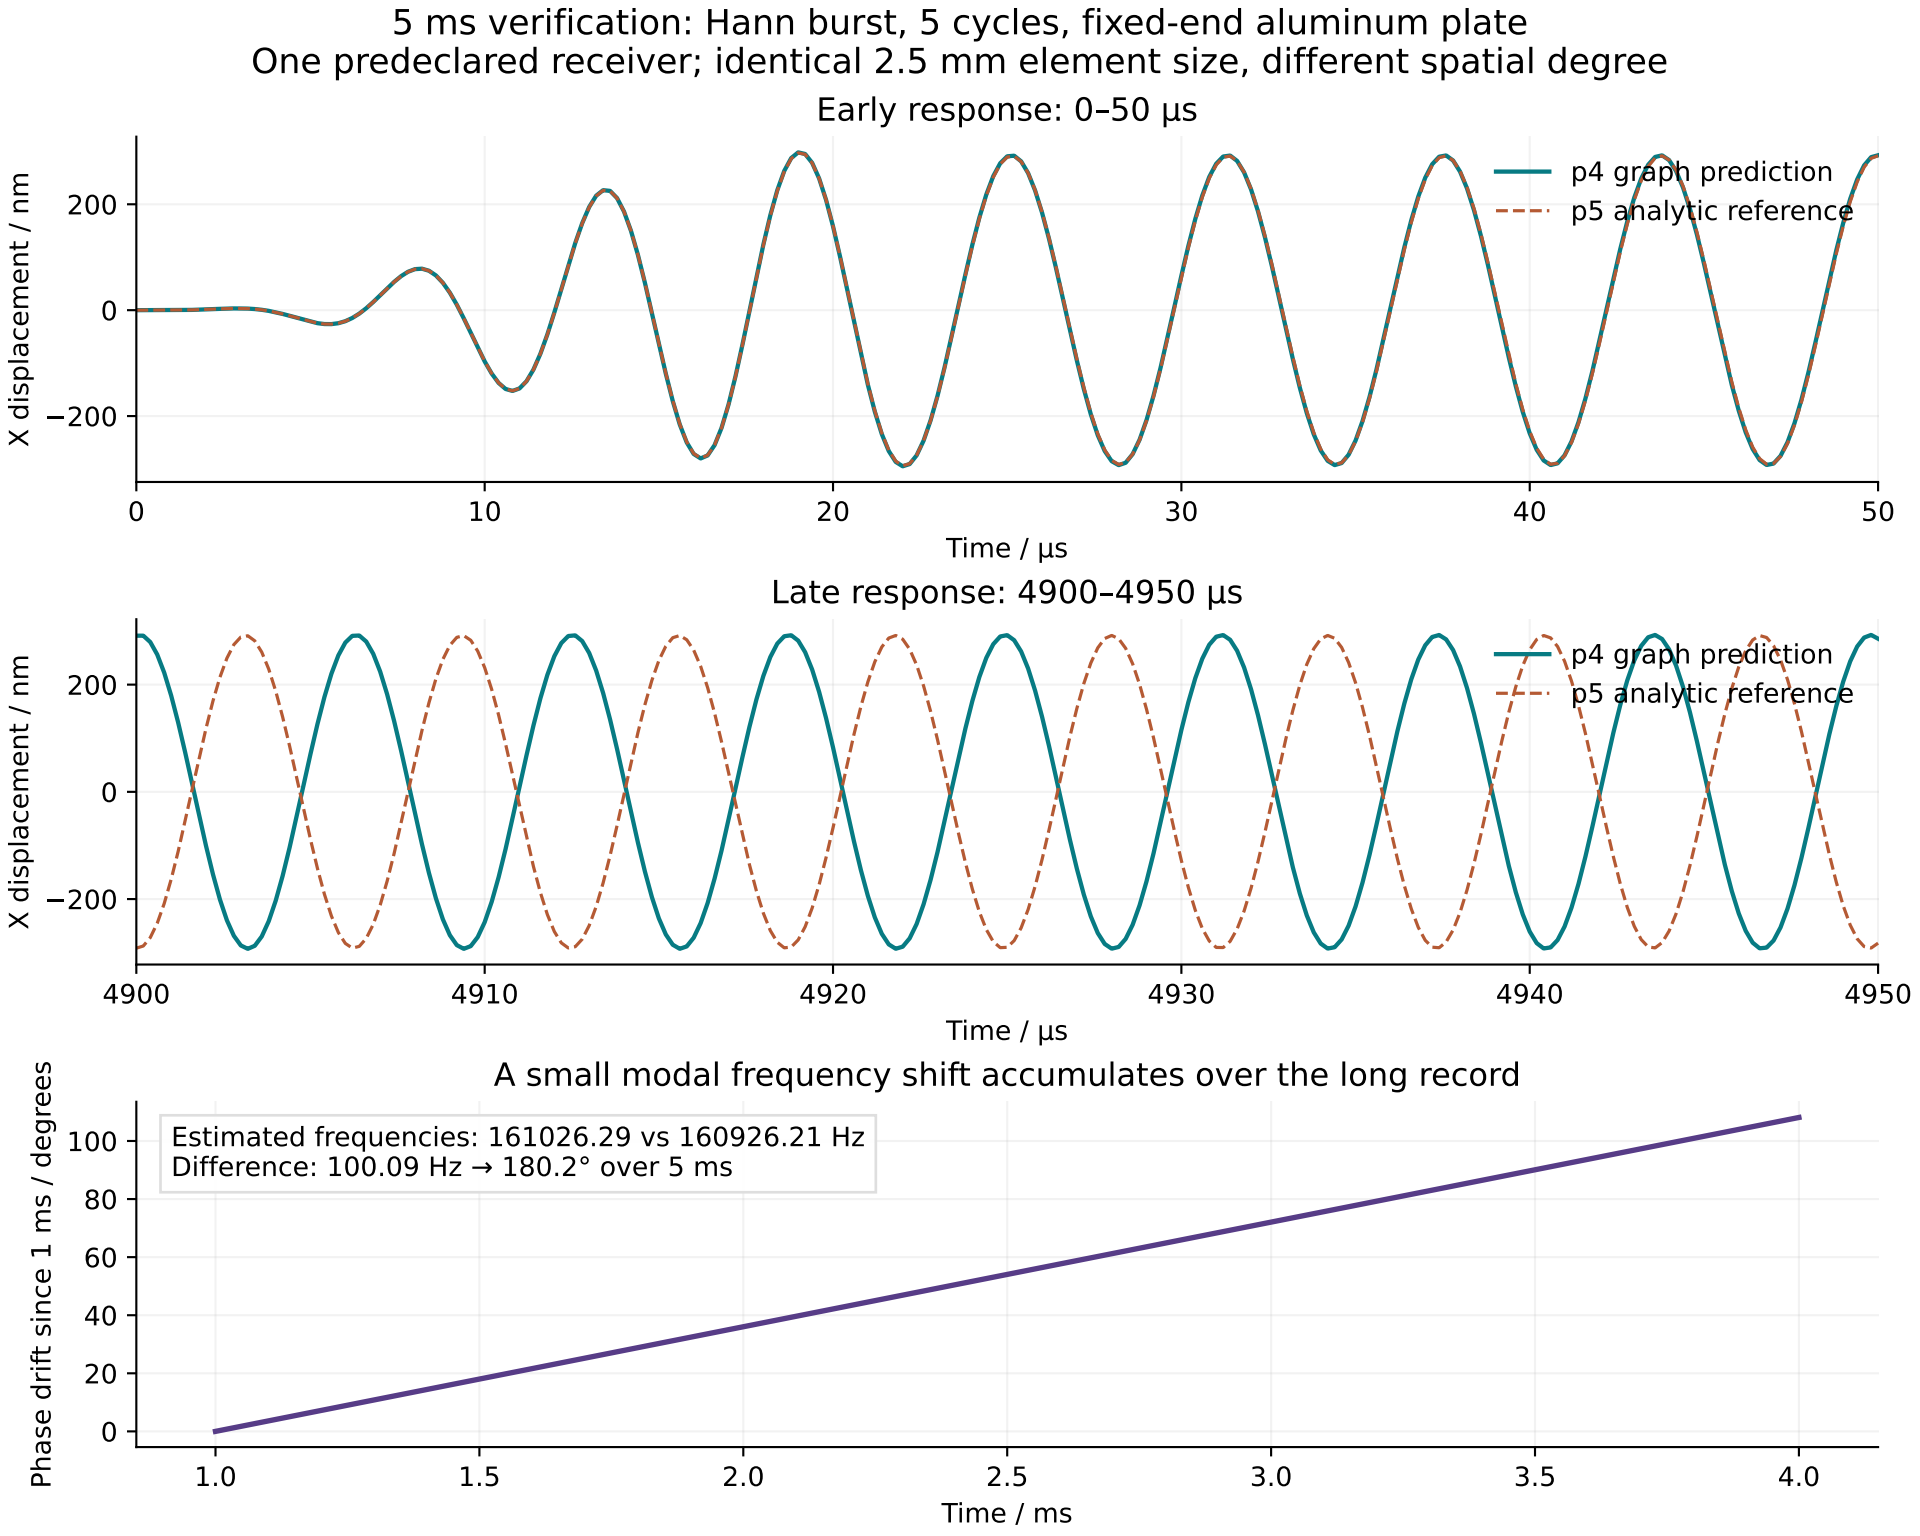
5 ms verification: Hann burst, 5 cycles, fixed-end aluminum plate
One predeclared receiver; identical 2.5 mm element size, different spatial degree
Early response: 0–50 µs
X displacement / nm
200
0
−200
0
10
20
30
40
50
Time / µs
p4 graph prediction
p5 analytic reference
Late response: 4900–4950 µs
X displacement / nm
200
0
−200
4900
4910
4920
4930
4940
4950
Time / µs
p4 graph prediction
p5 analytic reference
A small modal frequency shift accumulates over the long record
Estimated frequencies: 161026.29 vs 160926.21 Hz
Difference: 100.09 Hz → 180.2° over 5 ms
Phase drift since 1 ms / degrees
100
80
60
40
20
0
1.0
1.5
2.0
2.5
3.0
3.5
4.0
Time / ms