


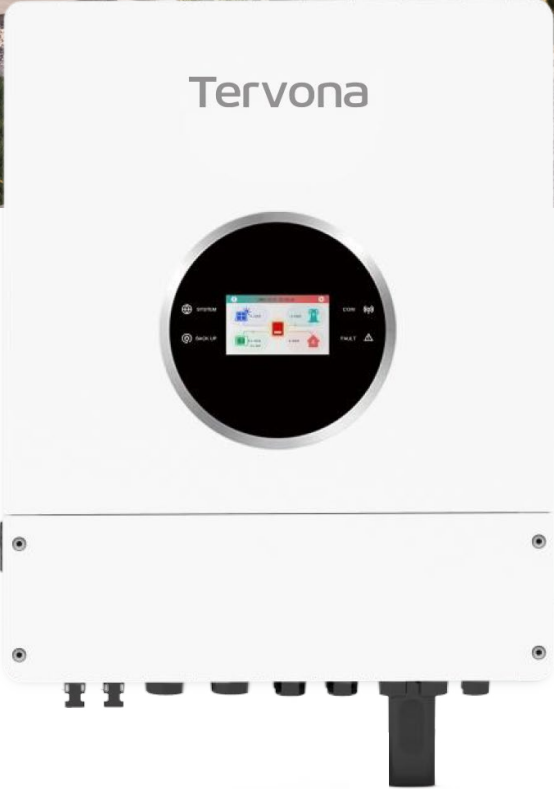

- Colorful touch LCD, IP66 protection degree
- Ac coupling to retrofit existing solar system
- Max. 6 pcs parallel for ongrid and off-grid operation;
Support multiple batteries parallel
- Max. charging/discharging current of 125/190/220/250A/275A
- 6 time periods for battery charging/discharging
- Support storing energy from diesel generator

Single Phase Hybrid Inverter

SLH-HBY Series

Model	HYB-10KSLH-01-TVN		HYB-12KSLH-01-TVN	HYB-16KSLH-01-TVN
Battery Input Parameters				
Battery Type	Lithium or Lead-acid Battery			
Rated Battery Voltage(V)	48V			
Maximum Charging Voltage (V)	≤60(configurable)			
Maximum Charging/Discharging Current (A)	220A	250A	275A	
PV Input Parameters				
Maximum DC Input Power(W)	18000W	20000W	22500W	
Maximum DC Input Voltage (V)	500V			
MPPT Voltage Range (V)	150~450V			120~480V
Start-up Voltage(V)	125V			120V
Maximum Input Current(A)	32A/32A/32A			39A/39A/39A
Number of MPPT Trackers	3			3/2+2+2
AC Output Parameters(Grid-tied)				
Maximum Apparent Output Power(VA)	11000	13200	17600	
Rated Output Voltage(V)	220/230V			
Rated Output Frequency(Hz)	50/60Hz			
Maximum Output Current (A)	50A/47.9A	60A/57.4A	80A/76.5A	
Output Power Factor	1(0.8 leading-0.8 lagging)			
AC Output Parameters(Off-grid)				
Rated Output Power(W)	10000	12000	16000	
Peak Output Power(W)	>200%, 15sec			
Rated Output Voltage (V)	220/230V			
Rated Output Frequency(Hz)	50/60Hz			
Rated Output Current(A)	43.5A	52.2A	69.6A	
Efficiency				
Max.Efficiency(PV)	98%			
Max.Efficiency(Battery)	94.5%			
European Efficiency	97.5%			
Protection				
PV Reverse Polarity Protection	Integrated			
PV Insulation Resistance Detection	Integrated			
Residual Current Detection	Integrated			
Output Overcurrent Protection	Integrated			
Output Short-circuit Protection	Integrated			
Output Overvoltage Protection	Integrated			
General Parameters				
Operating Temperature(°C)	-40~60°C(derating above 45°C)			
Storage Temperature(°C)	-30°C~65°C			
Relative Humidity	0~95%			
Operating Altitude(m)	≤4000(derating above 2000m)			
Cooling Method	Intelligent Forced Air Cooling			
Noise(dB)	<55dB			
Weight(kg)	21.5kg		40kg	
Dimensions(W×H×Dmm)	198*427*554mm			466*600*252mm
IP Rating	IP66			
Topology	High-frequency Isolation(Battery Side)			
Safety/EMC Certification	IEC62109,IEC61000,ISI6169&ISI6221(BIS)			
Grid Compliance	IEC61727,EN50549-1,VDE-4105,NRS-097-2-1,OVE-Richtlinie R25,UNE217001/2,Ordinace No.140			
Other Certifications	IEC61683,IEC62116,EN50530,IEC60068			