


- Pure sine wave solar inverter(on/off Grid)
- Inverter can run without battery
- Built-in Lithium battery automatic activation
- Dual communication ports for Battery communication and Wifi communication
- Smart battery charge design to optimize battery life
- Dual PV input
- WIFI&GPRS available for IOS and Android
- One-key restoration to factory Settings
- Built-in 160A MPPT solar charger(for 8.2kw,10.2kw)
- Built-in anti-dust kit for harsh environment
- Dual output
- On Off Grid Work Mode

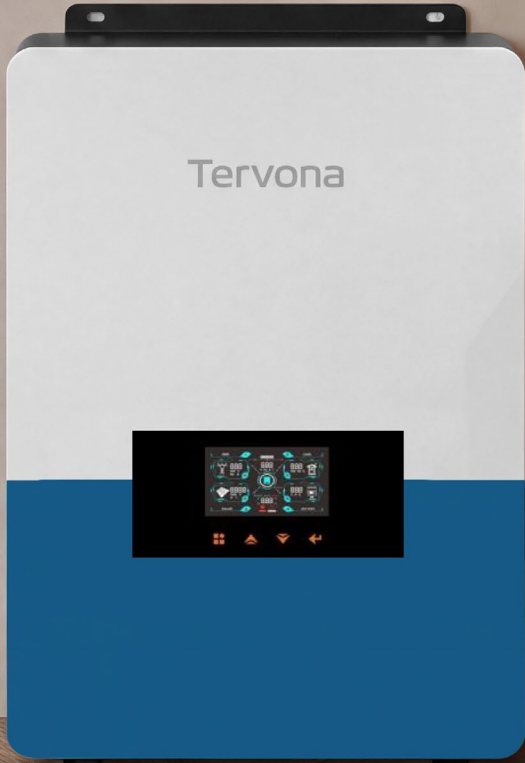

Solar Inverter

SLH-OFG Series

Model	OFG-8K2SLH-01-TVN	OFG-10KSLH-01-TVN
PHASE	Single phase	
Maximum PV Input Power	5400W+5400W	
Rate Output Power	8200W/8200VA	10200W/10200VA
Grid-Tie OPERATION		
PV INPUT(DC)		
Nominal DC Voltage/MaximumDC Voltage	360VDC/500VDC	
Start-up Voltage/Initial Feeding Voltage	90VDC/120VDC	
MPPT Voltage Range	90~450VDC	
Maximum Input Current	2/18A	
GRIG OUTPUT(AC)		
NominalOutput Voltage	220/230/240VAC	
Output Voltage Range	195-253VAC	
NominalOutput Current	35.6A	44.3A
Power Factor	>0.99	
EFFICIENCY		
Maximum Conversion Efficiency(DC-AC)	98%	
OFF-GRID,HYBRID OPERATION		
PV INPUT(DC)		
Maximum DC Voltage	500VDC	
Start-up Voltage/Initial Feeding Voltage	90VDC/120VDC	
MPP Voltage Range	90VDC~450VDC	
Number Of MPPT/Maximum Input Current	2/18A	
GRID OUTPUT(AC)		
NominalOutput Voltage	220/230/240VAC	
Output Voltage Range	195-253VAC	
Nominal Output Current	35.6A	44.3A
AC INPUT		
AC Start-up Voltage/Auto Restart Voltage	120-140VAC/180VAC	
AC Input Voltage Range	90-280VAC or 170-280VAC	
MaximumAC Input Current	48.2A	60A
BATTERY MODE OUTPUT(AC)		
Nominal Output Voltage	220/230/240VAC	
Efficiency	94%	
BATTERY&CHARGER		
Nominal Voltage	48VDC	
Maximum Solar Charging Current	160A	
MaximumAC Charging Current	140A	
Maximum Charging Current	160A	
GENERAL		
PHYSICAL		
Dimension,D*W*H(mm)	500*390*136	
Package Dimension,D*W*H(mm)	588*463*205	
INTERFACE		
Communication Port	RS232/RS485/WIFI/BMS	
ENVIRONMENT		
Operating Temperature	-10℃~50℃	