SigmaStar
USB Factory Tool User Guide

Version 0.1

© 2023 SigmaStar Technology. All rights reserved.

SigmaStar Technology makes no representations or warranties including, for example but not limited to, warranties of merchantability, fitness for a particular purpose, non-infringement of any intellectual property right or the accuracy or completeness of this document, and reserves the right to make changes without further notice to any products herein to improve reliability, function or design. No responsibility is assumed by SigmaStar Technology arising out of the application or use of any product or circuit described herein; neither does it convey any license under its patent rights, nor the rights of others.

SigmaStar is a trademark of SigmaStar Technology. Other trademarks or names herein are only for identification purposes only and owned by their respective owners.

REVISION HISTORY

Revision No.	Description	Date
0.1	• Initial release	10/11/2023

Copyright © 2023 SigmaStar Technology. All rights reserved.

TABLE OF CONTENTS

REVISION HISTORY ..... **i**
TABLE OF CONTENTS **1**
1. USB UPGRADE **1**
2. UVC MODE **3**
3. BIN FILE GENERATION **4**
4. DEBUG UPGRADE BY SCRIPT **6**
4.1. The Main Interface of Debug Upgrade 6
4.2. Empty USB Upgrading 7
4.3. USB Script Upgrading 7

Copyright © 2023 SigmaStar Technology. All rights reserved.

1. USB UPGRADE

USB Factory Tool Interface

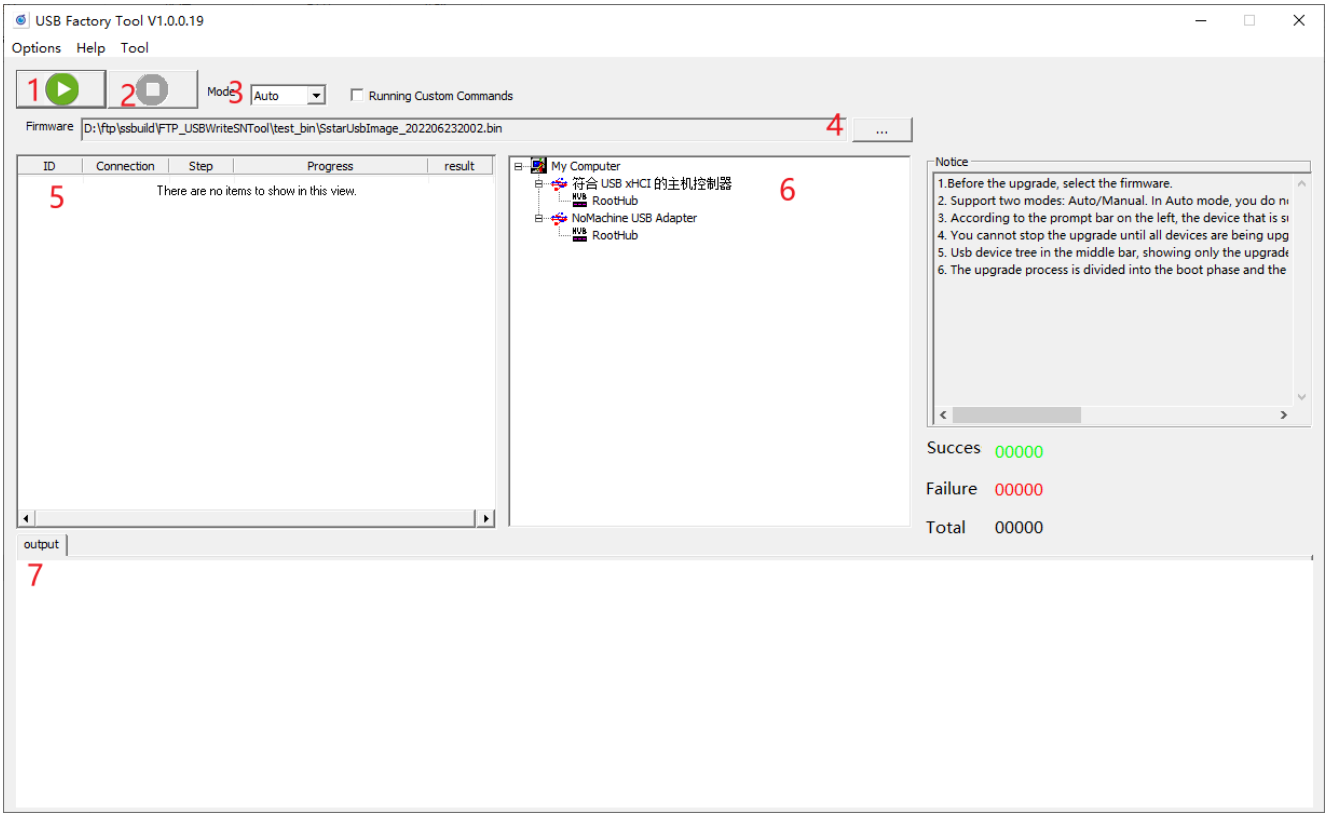

1. Start.
2. End. Click to end. It will wait for all upgrades to be completed, and those that have not yet started will not be upgraded.
3. Mode
   Auto: Auto mode, device will be upgraded if there is any;
   Manual: Manual upgrade. Select the device to be upgraded from Number 6, the upgrade will end automatically if successful.
4. Select bin file.
5. Shows upgrade success or failure.
6. USB Tree, only the device of SigmaStar will be shown.
7. Output log.
8. Running Custom Commands
9. Option
   saveLog: Save the log in the application directory.
   writes: Write SN.

Copyright © 2023 SigmaStar Technology. All rights reserved.

UVCMode: Enable UVCMode so that UVC can be identified.

10. Help

    View Help: View help.

11. Update History: Update history

System Menu:

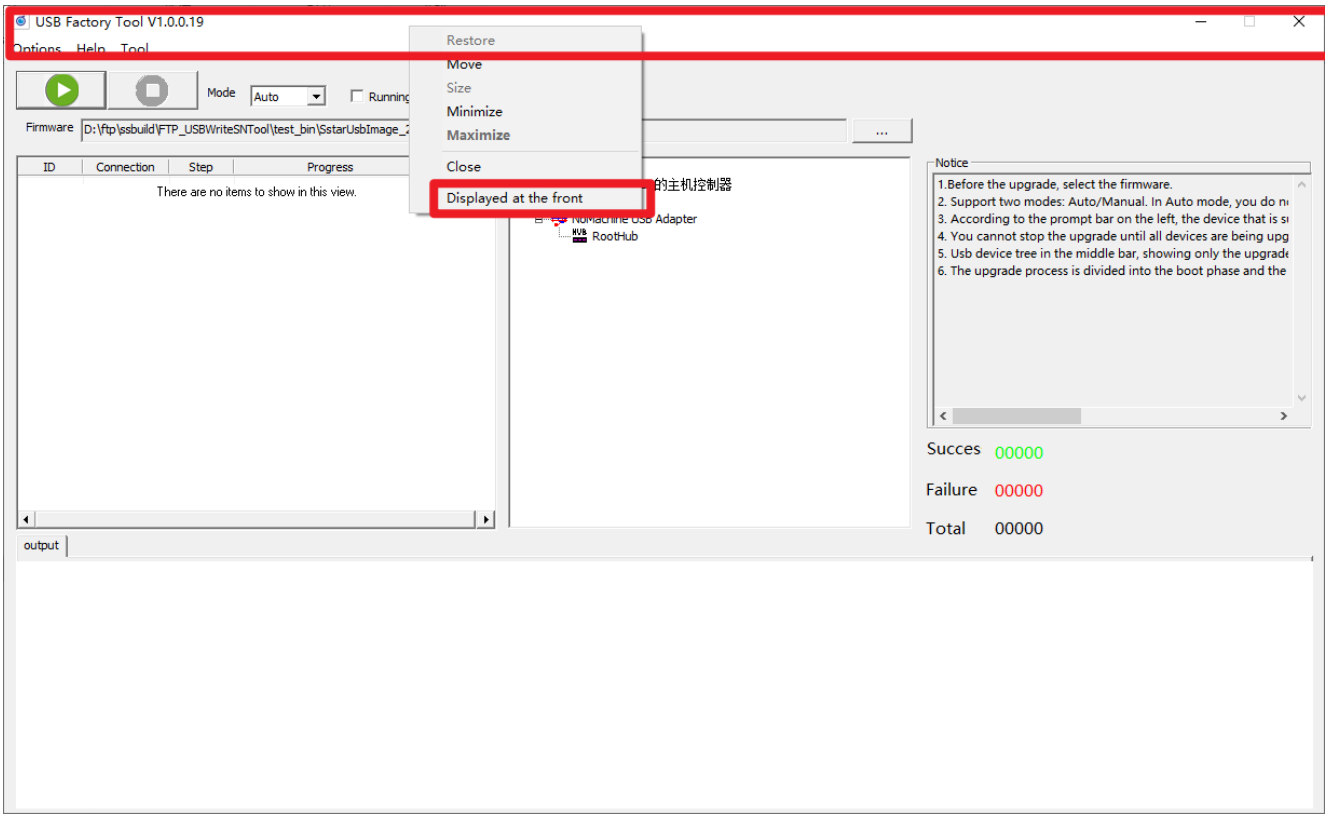

1. Right-click area to access system menu.
2. Show on top: If you want the application to always be displayed at the front, select this option.

Copyright © 2023 SigmaStar Technology. All rights reserved.

2. UVC MODE

1. Click Options and then select UVCMode
   Since ordinary USB upgrade is different from UVC USB upgrade, do not mix them together.

2. Follow the same steps as ordinary USB upgrade.

Copyright © 2023 SigmaStar Technology. All rights reserved.

3. BIN FILE GENERATION

1. First, compile and generate the image normally, and then make image -j32 under the project directory.
2. Run ./image/makefiletools/script/make_usb_factory_sigmastar.sh -i IPL -u UBOOT under the project directory.

   This script is taken from the bin from project/board/i6f/boot/usb/upgrade, in which IPL and TF-A will be released, but uboot will not be released automatically. If there is no need to manually compile and copy to this directory, you can just run ./image/makefiletools/script/make_usb_factory_sigmastar.sh

   "usage" will show the bin that already exists in the directory.

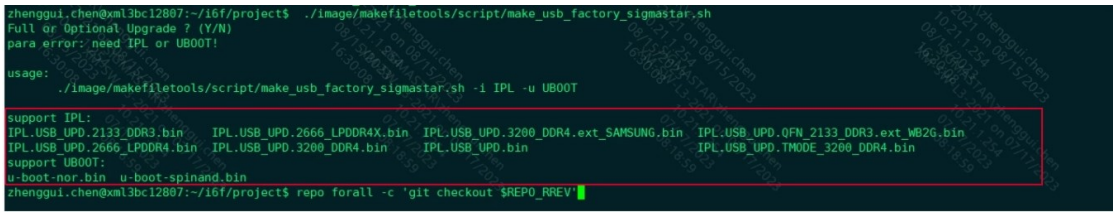

3. Based on the method set out in Step 2, start running the script. You will have to manually select "Full or Optional Upgrade?" If you enter Y or press Enter, it will mean that all es in auto_update.txt have to be upgraded. The corresponding bin generated is shown below:

If you enter N, you will need to manually enter and select the corresponding es. These es are obtained by parsing auto_update.txt. After everything is completed, the corresponding bin will be generated.

After the operation is over, there will be a corresponding log. Select SstarUsbImage_xxxx.bin which has been generated in the upgrade tool to start upgrading.

Copyright © 2023 SigmaStar Technology. All rights reserved.

Copyright © 2023 SigmaStar Technology. All rights reserved.

4. DEBUG UPGRADE BY SCRIPT

4.1. The Main Interface of Debug Upgrade

The main function of this interface: to facilitate tuning without the need to pack images.

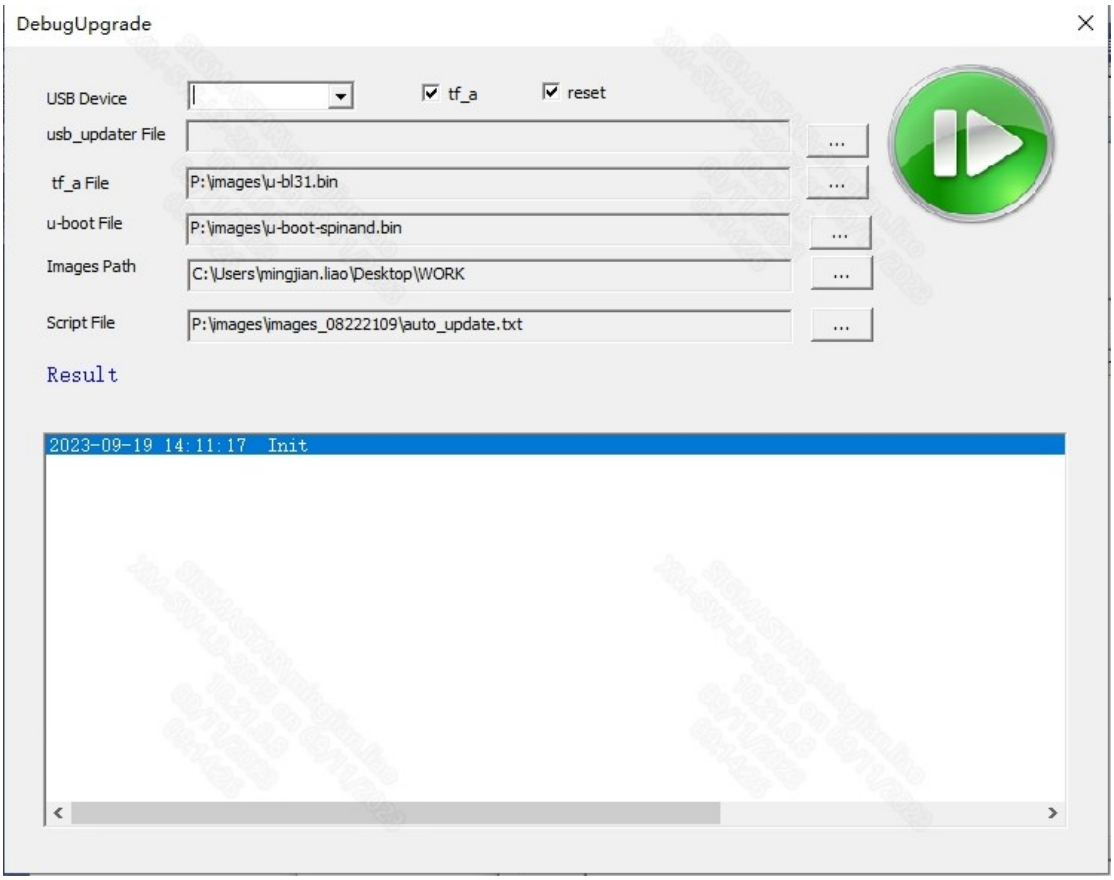

1. USB Device: USB port.
2. usb_updater file: The IPL files you will need when performing empty-chip upgrading.
3. u-boot file: The u-boot you will need when performing empty upgrading.
4. images path: The root directory of image package.
5. script file: The script for upgrading.
6. Result: Upgrading result.
7. Upgrading log.
8. Reset: Whether the device should be reset after upgrading succeeds.
9. tf_a: Click if necessary.
10. tf_a File: the path to the tf_a document.

Copyright © 2023 SigmaStar Technology. All rights reserved.

4.2. Empty USB Upgrading

usb_updater file and u-boot file must be selected. They can be obtained as the following figure shows.

To use the spinand of OPERA series chips, for instance, select the ipl and uboot of your board.

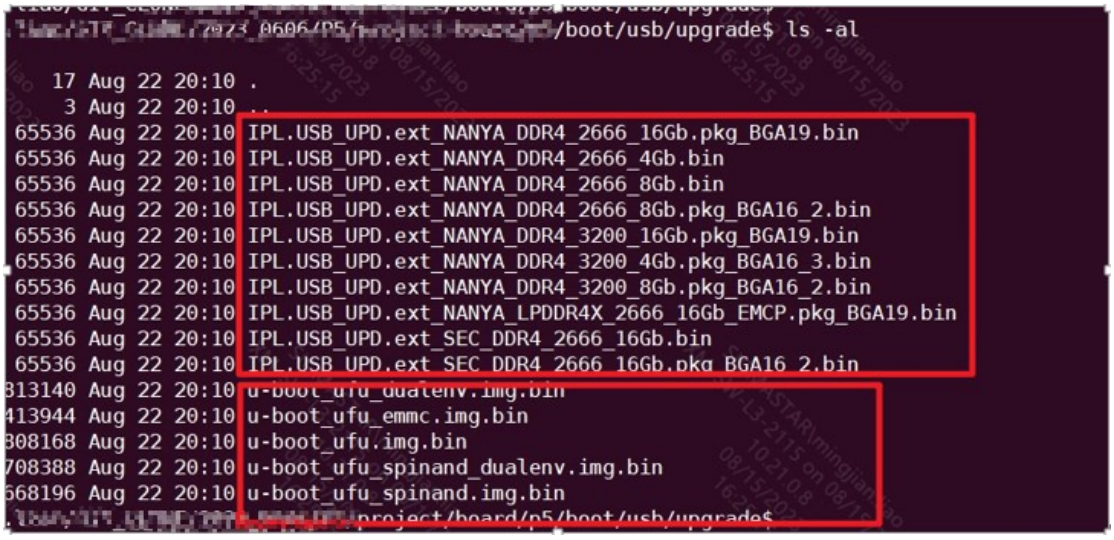

4.3. USB Script Upgrading

Images path and script file must be selected, as the following figure shows.

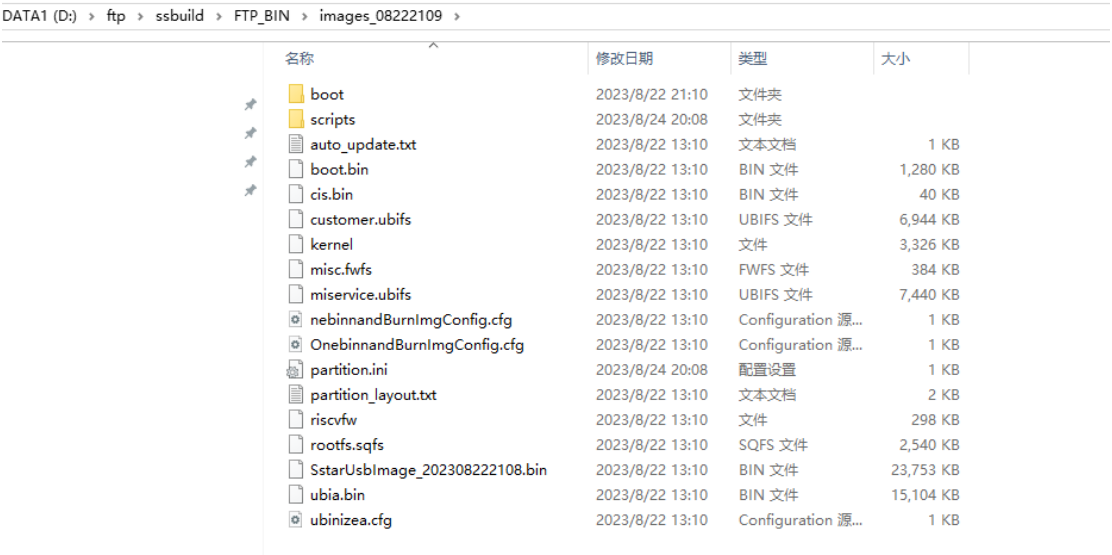

Copyright © 2023 SigmaStar Technology. All rights reserved.

5. 5.RUNNING CUSTOM COMMANDS

During the upgrade process, you can run custom scripts to choose from

5.1. Custom Script Naming

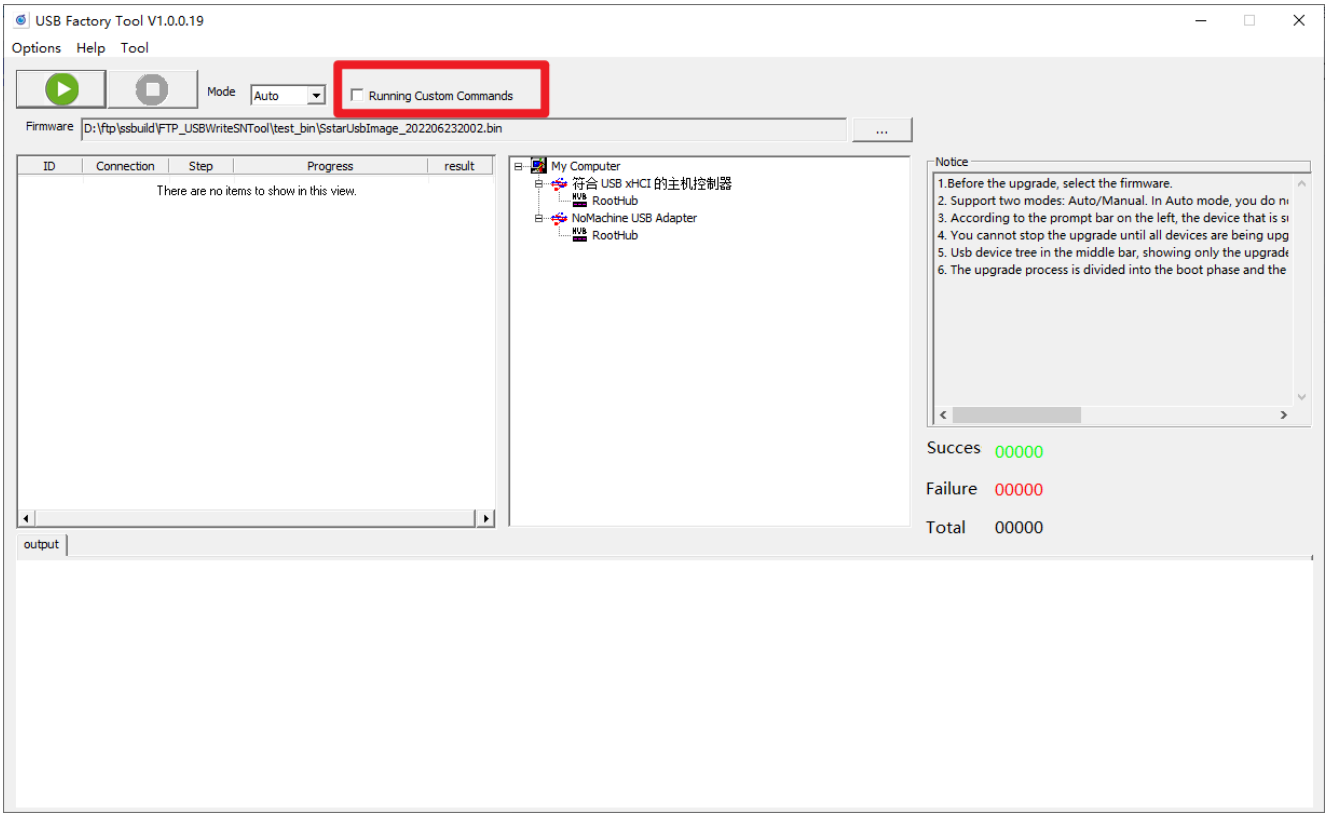

Add before the naming to be run#@

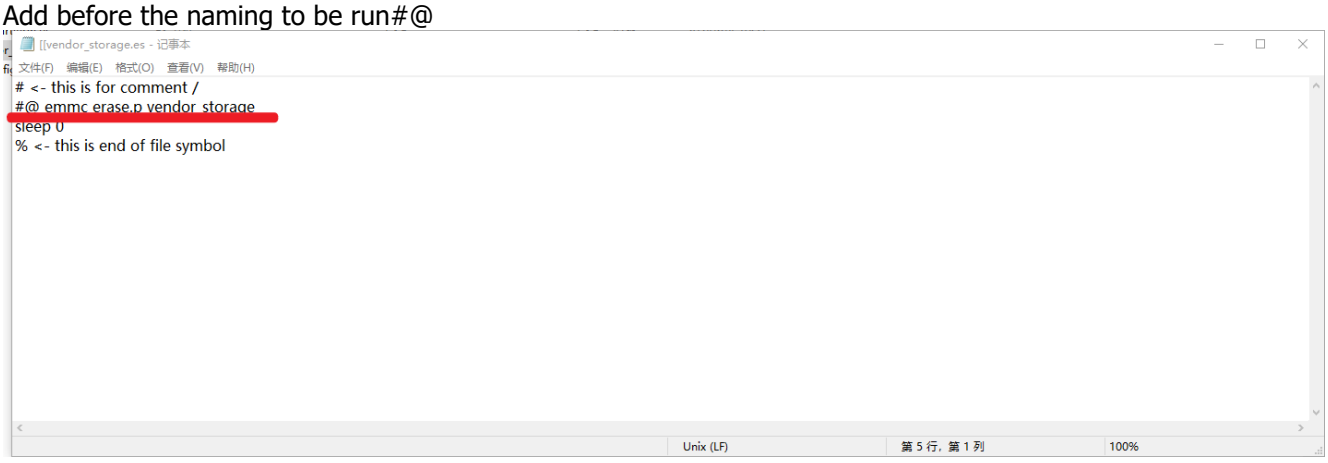

Copyright © 2023 SigmaStar Technology. All rights reserved.