

3


Can be custom assembled by local F.A.S.T. distributors

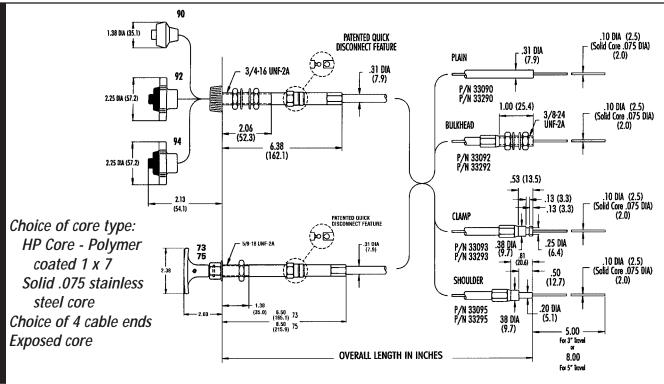

Choice of core type: HP Core - Polymer coated 1 x 7 Solid .075 stainless steel core 10-32 Threaded Rod (output end)

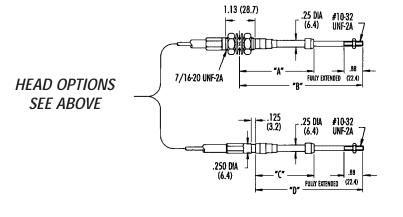

HP Core 1/4"-28 Threaded Rod (output end)

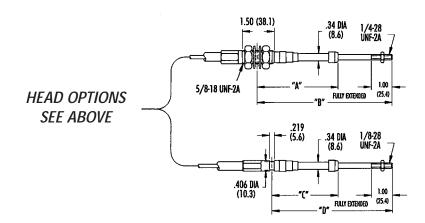

- Light Duty: exposed Solid Core or 1 x 7 HP Core.
 HP Core: choose for best flexibility, lower backlash and higher efficiency. Polymer coated 1 x 7 wire rope.
 - Solid Core: .075 solid stainless steel core.
- Heavy Duty: 3 & 4 Series threaded end rods.

- Temperature Range: -65 to +225°F / -54 to +107°C Std. -65 to +300°F / -54 to +149°C HEFT 2
- Applications: engine RPM, or where coarse or fine adjustments are needed.

Quick Disconnect Cable Heads #73 Positive Lock Head - 3" Travel #75 Positive Lock Head - 5" Travel #90 Vernier-Small Knob #92 Vernier-Black Center Button #94 Vernier-Red Center Button

To Order

Vernier and Positive Lock cable control heads may be ordered as a complete assembly (head and cable attached) or separately. Order the desired control head using the two-digit number 90, 92, 94, 73 or 75. Order the cable using the five-digit number from "Building a Part Number." To order a complete assembly, combine the control head number with the desired cable number. Example: if you desire control head #94 and cable #33092, then combine to make the assembly part number X94-33092-length.

Load Rating: Maximum 20 lbs. is recommended.

Building a Part Number				
33 9 0				
	Overall Length in Inches			
Head Type	Conduit Fitting Type:Plain = 0			
00 None-Cable only 90 Vernier-Black Button - Black Knob	Bulkhead = 2 Clamp = 3			
92 Vernier-Black Button-Black Knob	Shoulder = 5			
94 Vernier-Red Button-Black Knob 73 Positive Lock - 3" Travel	Conduit Size:			
75 Positive Lock - 5" Travel	0 = .31 dia. Std 2 = .26 dia			
Cable Type	Light Duty			
O Solid Core (3 Series Only) 1 Hi-Performance (Standard)				
3 HEFT 2 (Hi-Performance & High Temperature)				


Note: A 3 Series Light Duty Conduit is available. (.26 O.D.) Part Number is 3329X-L.

Specifications						
Travel	Bulkhead End		Clamp End			
Inch/(MM)	DIM "A"	DIM "B"	DIM "C"	DIM "D"		
	Inch/(MM)	Inch/(MM)	Inch/(MM)	Inch/(MM)		
1.0	3.00	4.94	2.31	4.25		
(25.4)	(76.2)	(125.5)	(58.7)	(108.0)		
2.0	4.00	6.94	3.31	6.25		
(50.8)	(101.6)	(176.3)	(84.1)	(158.8)		
3.0	5.00	8.94	4.31	8.25		
(76.2)	(127.0)	(227.1)	(109.5)	(209.6)		

Load Rating: Maximum 20 lbs. is recommended.

Specifications						
Travel	Bulkhead End		Clamp End			
Inch/(MM)	DIM "A"	DIM "B"	DIM "C"	DIM "D"		
	Inch/(MM)	Inch/(MM)	Inch/(MM)	Inch/(MM)		
1.0	3.13	5.19	2.50	4.56		
(25.4)	(79.5)	(131.8)	(63.5)	(115.8)		
2.0	4.13	7.19	3.50	6.56		
(50.8)	(104.9)	(182.6)	(88.9)	(166.6)		
3.0	5.13	9.19	4.50	8.56		
(76.2)	(130.3)	(233.4)	(114.3)	(217.4)		

Load Rating: Maximum 20 lbs. is recommended.

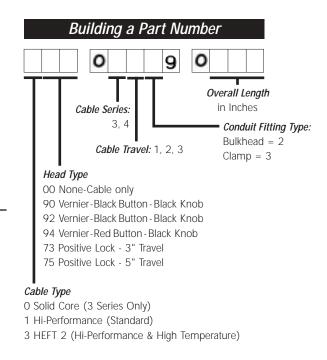

Note: A 3 Series Light Duty Conduit is available. (.26 O.D.) Part Number is 3329X-L.