



Can be custom assembled by local F.A.S.T. distributors


3 SERIES

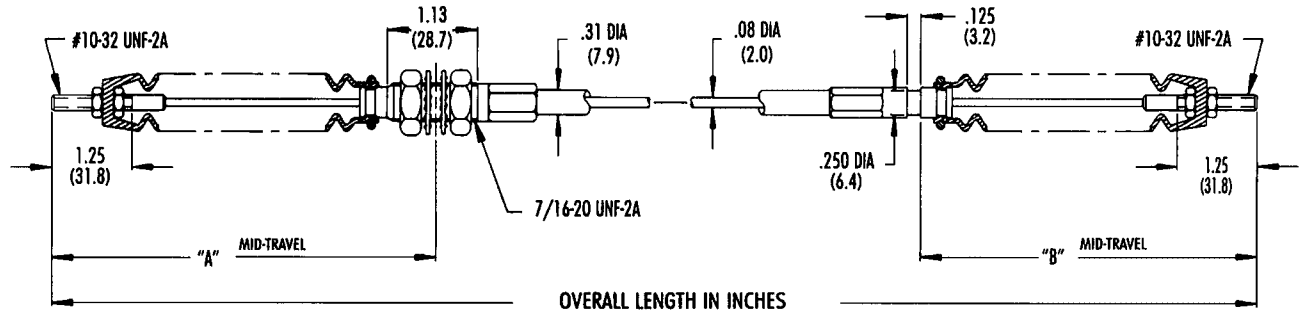

4 SERIES

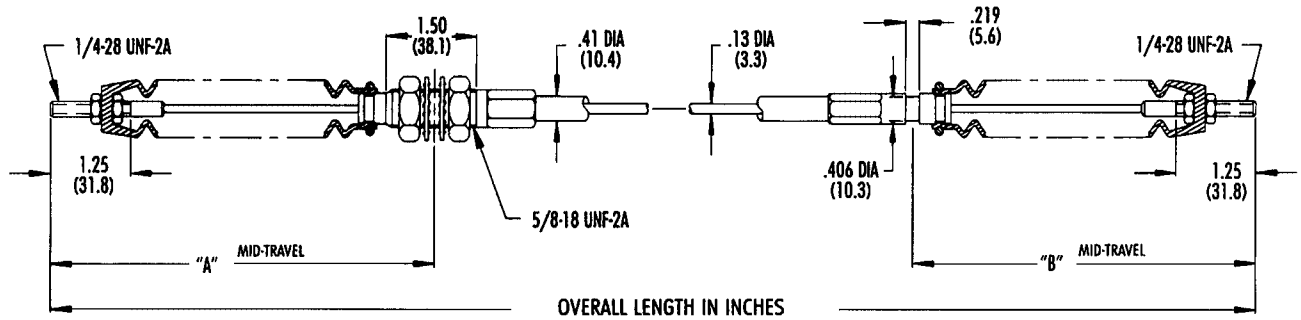

6 SERIES

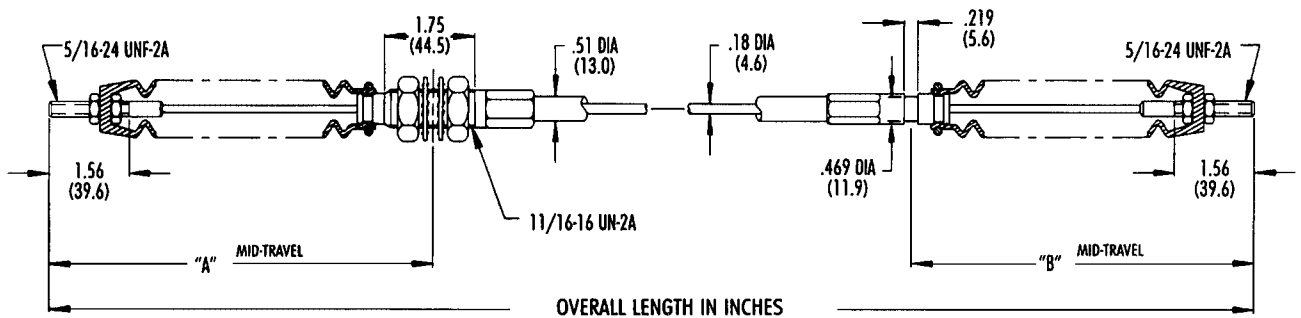

- 3, 4, 6 Series available.
- Applications: throttle, clutch, light to heavy duty pull loads.
- Improved boot seals: O-ring on boot for tighter seal.
- Tear resistant silicone boots.

- Temperature Range:
-65 to +225°F / -54 to +107°C Std.
-65 to +300°F / -54 to +149°C HEFT 2
- HP coated core and polymer liner.

3 SERIES

1 x 19 Wire Rope - Polymer Coated
10 - 32 Threaded Rods

Specifications

Travel	Bulkhead End	Clamp End	Operating Loads	
Inch/(MM)	DIM "A" Inch/(MM)	DIM "B" Inch/(MM)	Push Lbs./(N)	Pull Lbs./(N)
1.0 (25.4)	4.44 (112.8)	3.75 (95.3)	0	120 (534)
2.0 (50.8)	5.94 (150.9)	5.25 (133.4)	0	120 (534)
3.0 (76.2)	7.44 (189.0)	6.75 (171.5)	0	120 (534)
4.0 (101.6)	8.94 (227.1)	8.25 (209.6)	0	120 (534)
5.0 (127.0)	10.44 (265.2)	9.75 (247.7)	0	120 (534)


4 SERIES

1 x 19 Wire Rope
1/4" - 28 Threaded Rods

Specifications

Travel	Bulkhead End	Clamp End	Operating Loads	
Inch/(MM)	DIM "A" Inch/(MM)	DIM "B" Inch/(MM)	Push Lbs./(N)	Pull Lbs./(N)
1.0 (25.4)	4.69 (119.1)	4.06 (103.1)	0	230 (1023)
2.0 (50.8)	6.19 (157.2)	5.56 (141.2)	0	230 (1023)
3.0 (76.2)	7.69 (195.3)	7.06 (179.3)	0	230 (1023)
4.0 (101.6)	9.19 (233.4)	8.56 (217.4)	0	230 (1023)
5.0 (127.0)	10.69 (271.5)	10.06 (255.5)	0	230 (1023)

Building a Part Number

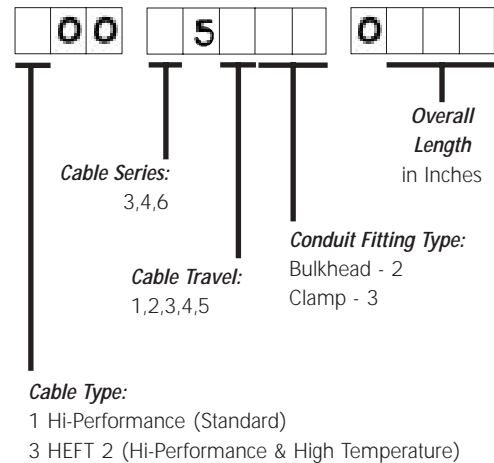

6 SERIES

1 x 19 Wire Rope - Polymer Coated
5/16" - 24 Threaded Rods

Specifications

Travel	Bulkhead End	Clamp End	Operating Loads	
Inch/(MM)	DIM "A" Inch/(MM)	DIM "B" Inch/(MM)	Push Lbs./(N)	Pull Lbs./(N)
1.0 (25.4)	5.23 (130.3)	4.44 (112.8)	0	400 (1779)
2.0 (50.8)	6.63 (168.4)	5.94 (150.9)	0	400 (1779)
3.0 (76.2)	8.13 (206.5)	7.44 (189.0)	0	400 (1779)
4.0 (101.6)	9.63 (244.8)	8.94 (227.1)	0	400 (1779)
5.0 (127.0)	11.13 (282.7)	10.44 (265.2)	0	400 (1779)