SPEED_FRQ	*Speed Calculator Based on Rotor Angle from QEP sensor*

Description   This module calculates the motor speed based on a rotor position measurement from QEP sensor.

Availability   This IQ module is available in one interface format:

1) The C interface version

Module Properties   **Type:** Target Independent, Application Dependent

Target Devices: x281x or x280x

C Version File Names: speed_fr.c, speed_fr.h

IQmath library files for C: IQmathLib.h, IQmath.lib

Item	C version	Comments
Code Size□ (x281x/x280x)	104/104 words	
Data RAM	0 words•	
xDAIS ready	No	
XDAIS component	No	IALG layer not implemented
Multiple instances	Yes	
Reentrancy	Yes	

• Each pre-initialized "_iq" SPEED_MEAS_QEP structure consumes 20 words in the data memory

□ Code size mentioned here is the size of the *calc()* function

C Interface

Object Definition
    The structure of SPEED_MEAS_QEP object is defined by following structure definition

```
typedef struct {  _iq ElecTheta;          // Input: Electrical angle
                  Uint32 DirectionQep;    // Variable: Direction of rotation (Q0)
                  _iq OldElecTheta;       // History: Electrical angle at previous step
                  _iq Speed;              // Output: Speed in per-unit
                  Uint32 BaseRpm;         // Parameter: Base speed in rpm (Q0)
                  _iq21 K1;               // Parameter: Constant for differentiator (Q21)
                  _iq K2;                 // Parameter: Constant for low-pass filter
                  _iq K3;                 // Parameter: Constant for low-pass filter
                  int32 SpeedRpm;         // Output : Speed in rpm  (Q0)
                  void (*calc)();         // Pointer to the calculation function
                } SPEED_MEAS_QEP;         // Data type created
```

typedef SPEED_MEAS_QEP * SPEED_MEAS_QEP_handle;

Item	Name	Description	Format*	Range(Hex)
Inputs	ElecTheta	Electrical angle	GLOBAL_Q	00000000-7FFFFFFF (0 – 360 degree)
Outputs	Speed	Computed speed in per-unit	GLOBAL_Q	80000000-7FFFFFFF
	SpeedRpm	Speed in rpm	Q0	80000000-7FFFFFFF
SPEED_QEP parameter	K1	K1 = 1/(fb*T)	Q21	80000000-7FFFFFFF
	K2	K2 = 1/(1+T*2*pi*fc)	GLOBAL_Q	80000000-7FFFFFFF
	K3	K3 = T*2*pi*fc/(1+T*2*pi*fc)	GLOBAL_Q	80000000-7FFFFFFF
	BaseRpm	BaseRpm = 120fb/p	Q0	80000000-7FFFFFFF
Internal	OldElecTheta	Electrical angle in previous step	GLOBAL_Q	00000000-7FFFFFFF (0 – 360 degree)

* GLOBAL_Q valued between 1 and 30 is defined in the IQmathLib.h header file.

Special Constants and Data types

SPEED_MEAS_QEP
The module definition is created as a data type. This makes it convenient to instance an interface to speed calculation based on measured rotor angle. To create multiple instances of the module simply declare variables of type SPEED_MEAS_QEP.

SPEED_MEAS_QEP_handle
User defined Data type of pointer to SPEED_MEAS_QEP module

SPEED_MEAS_QEP_DEFAULTS
Structure symbolic constant to initialize SPEED_MEAS_QEP module. This provides the initial values to the terminal variables as well as method pointers.

Methods

void speed_calc(SPEED_MEAS_QEP_handle);

This definition implements one method viz., the speed calculation based on measured rotor angle computation function. The input argument to this function is the module handle.

Module Usage

Instantiation
The following example instances two SPEED_MEAS_QEP objects
SPEED_MEAS_QEP speed1, speed2;

Initialization
To Instance pre-initialized objects
SPEED_MEAS_QEP speed1 = SPEED_MEAS_QEP_DEFAULTS;
SPEED_MEAS_QEP speed2 = SPEED_MEAS_QEP_DEFAULTS;

Invoking the computation function
speed1.calc(&speed1);
speed2.calc(&speed2);

Example
The following pseudo code provides the information about the module usage.

```
main()
{


}


void interrupt periodic_interrupt_isr()
{
        speed1.ElecTheta = theta1;          // Pass inputs to speed1
        speed2.ElecTheta = theta2;          // Pass inputs to speed2

        speed1.calc(&speed1);               // Call compute function for speed1
        speed2.calc(&speed2);               // Call compute function for speed2

        measured_spd1 = speed1.Speed;       // Access the outputs of speed1
        measured_spd2 = speed2.Speed;       // Access the outputs of speed2
}
```

Technical Background

The typical waveforms of the electrical rotor position angle, θ_e, in both directions can be seen in Figure 1. Assuming the direction of rotation is not available. To take care the discontinuity of angle from 360^o to 0^o (CCW) or from 0^o to 360^o (CW), the differentiator is simply operated only within the differentiable range as seen in this Figure. This differentiable range does not significantly lose the information to compute the rotor speed.

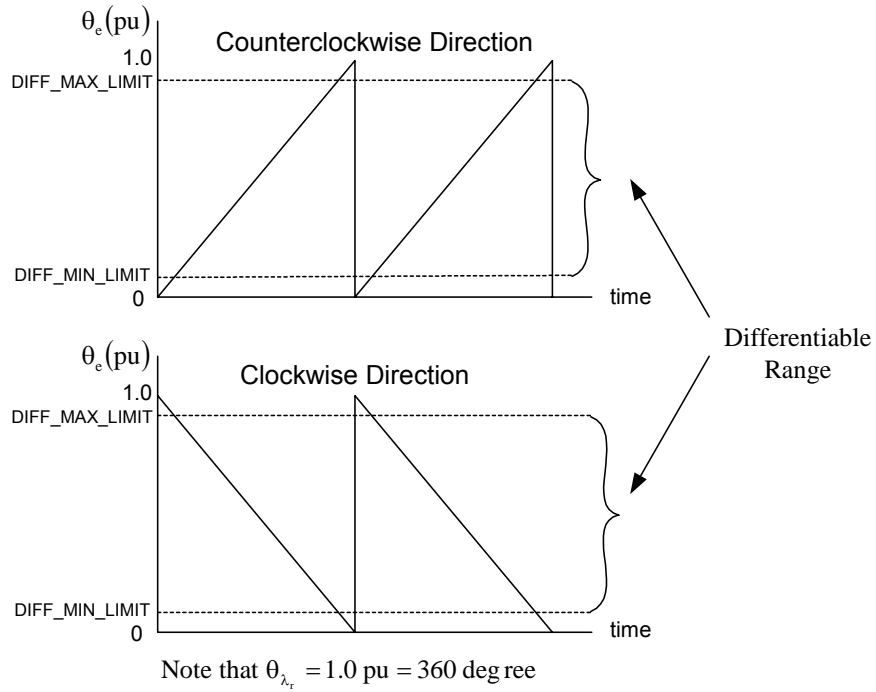Note that $\theta_{\lambda_r} = 1.0 \, \mathrm{pu} = 360 \, \mathrm{deg\,ree}$

Figure 1: The waveforms of rotor position in both directions

The differentiator equation of rotor position can be expressed as follows.

$$\omega_e(k) = K_1\big(\theta_e(k) - \theta_e(k-1)\big) \tag{1}$$

where $K_1 = \dfrac{1}{f_b T}$, f_b is base frequency (Hz) and T is sampling period (sec).

In addition, the rotor speed is necessary to be filtered out by the low-pass filter in order to reduce the amplifying noise generated by the pure differentiator. The simple 1st-order low-pass filter is used, then the actual rotor speed to be used is the output of the low-pass filter, $\hat{\omega}_e$, seen in following equation. The continuous-time equation of 1st-order low-pass filter is as

$$\frac{d\hat{\omega}_e}{dt} = \frac{1}{\tau_c}\left(\omega_e - \hat{\omega}_e\right) \tag{2}$$

where $\tau_c = \dfrac{1}{2\pi f_c}$ is the low-pass filter time constant (sec), and f_c is the cut-off frequency (Hz). Using backward approximation, then (2) finally becomes

$$\hat{\omega}_e(k) = K_2\hat{\omega}_e(k-1) + K_3\omega_e(k) \tag{3}$$

where $K_2 = \dfrac{\tau_c}{\tau_c + T}$, and $K_3 = \dfrac{T}{\tau_c + T}$.

Next, Table 1 shows the correspondence of notations between variables used here and variables used in the program (i.e., speed_fr.c, speed_fr.h). The software module requires that both input and output variables are in per unit values.

	Equation Variables	Program Variables
Input	θ_e	ElecTheta
Output	$\hat{\omega}_e$	Speed
Others	K1	K1
	K2	K2
	K3	K3

Table 1: Correspondence of notations