Waveforms for 5G Brief Introduction

Long Zhang

Hardware Engineer
Tieto Oyj, ZSR Product Development Services /
long.a.zhang@tieto.com

tieto

Table of contents

- Motivation and Background

- Major Multicarrier Modulation Candidates : FBMC, GFDM, BFDM, UFMC and FTN

- Waveform Choice and Comparison

tieto

天地之间，其犹橐籥乎?
虚而不屈，动而俞出。
　　　　——老子《道德经》

tieto

Motivation and Background

- **Very large data-rate wireless connectivity**, requires a modulation scheme with large spectral and energy efficiency

- **Internet of Things (IoT)** , requiring a modulation scheme robust to time synchronization errors and performing well for short communications

- **Tactile Internet**, reliable and have small latency

- **Wireless Regional Area Networks (WRAN)** , be able to efficiently exploit the available fragmented and heterogeneous spectrum.

tieto

5G Standard Development
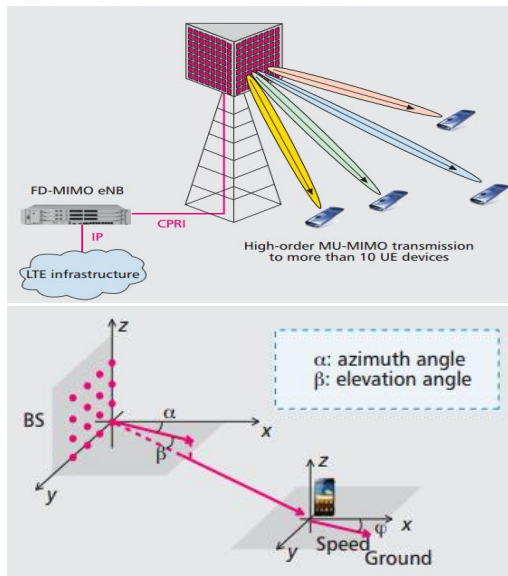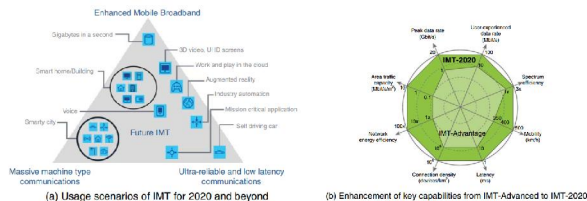
- ## R-13

  full dimension MIMO (FD-MIMO)

  licensed assisted access (LAA, only downlink) ; carrier aggregation with up to 32 component carriers

  further cost reductions for MTC(NB-IoT)

- ## R-14

  in case of FD-MIMO, antenna ports up to 32

  LAA support uplink

  expected to introduce latency reduction technologies, e.g. grantless procedure; shorten the TTI length

  vehicle-related services (V2X, e.g. vehicle-to-vehicle (V2V) , vehicle-to-infra (V2I) , vehicle-to-pedestrian (V2P)) within the scope of the study; latency reduction, multi-cell multicast/broadcast meet industry and regulatory requirements

tieto

Chief Advantages of OFDM and OFDMA

- the ease of implementation of both transmitter and receiver thanks to the use of FFT and IFFT
- the ability to counteract multi-path distortion
- the orthogonality of subcarriers, which eliminates intercell interference
- their easy coupling with adaptive modulation techniques
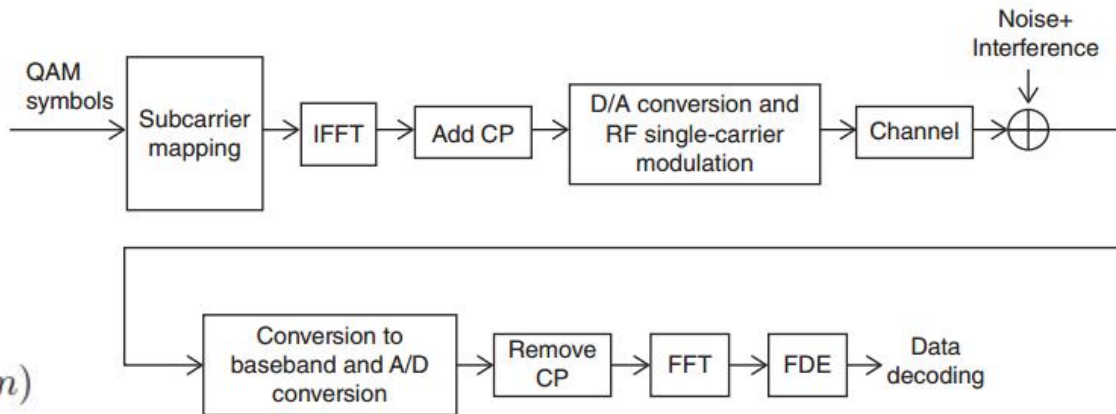- the ease of integration with multi-antenna hardware, both at the transmitter and receiver

tieto

Public

OFDM

- *K* QAM symbols
  (*s*(1),*s*(2),... ,*s*(*K*))
  is mapped onto
  the available *K*
  subcarriers
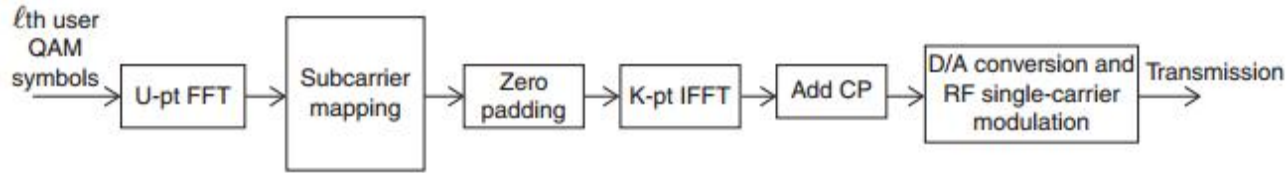
$$Z(m) = H(m)s(m) + W(m)$$

- Soft estimate of
  the symbol
  s(*m*), to be sent to
  the data decoding
  block

$$\hat{s}(m) = Z(m)/H(m)$$

$$
\begin{bmatrix} y_{N-1} \\ y_{N-2} \\ \vdots \\ y_0 \end{bmatrix} =
\begin{bmatrix}
h_0 & h_1 & \ldots & h_\mu & 0 & \ldots & 0 \\
0 & h_0 & \ldots & h_{\mu-1} & h_\mu & \ldots & 0 \\
\vdots & \vdots & \ddots & \ddots & \ddots & \ddots & \vdots \\
0 & \ldots & 0 & h_0 & \ldots & h_{\mu-1} & h_\mu
\end{bmatrix}
\begin{bmatrix} x_{N-1} \\ \vdots \\ x_0 \\ x_{-1} \\ \vdots \\ x_{-\mu} \end{bmatrix}
$$

© Tieto Corporation

tieto

SC-FDMA

*ℓ*th user QAM symbols → U-pt FFT → Subcarrier mapping → Zero padding → K-pt IFFT → Add CP → D/A conversion and RF single-carrier modulation → Transmission

- *U* denote the number of subcarriers (out of the available *K*) that have been assigned to the *L* th user in the current resource slot, a block of *U* QAM symbols is FFTed and mapped onto the assigned subcarriers

- "Zero padding" block forms a vector of *K* elements

- According to the OFDMA, active users must transmit synchronously so that the base station receiver is able to simultaneously collect the data from the users that are using the *K* available subcarriers

- U-pt smaller PAPR than pure OFDMA K-pt (oversampled)

tieto

Cyclic Prefix

Public

- Eliminating the ISI from the previous symbol

- Converting the linear convolution with a channel filter into a circular convolution, which allows for simple frequency-domain channel estimation and equalization(motivation)

- $X=[x_1,\ldots,x_n]$, $h=[h_1,\ldots,h_L]$, output of convolution is $n+L-1$, $L-1$ overlapped with its following OFDM symbol and causes ISI;

  $x'=[x_{n-lcp+1},\ldots, x_n, x_1\ldots,x_n]$, $y=[y_{lcp+1},\ldots,y_{lcp+n}]$ equal to cyclic convolution

- The DFT of the output signal $y=x\otimes h$ can be obtained by $Y[s] = H[s]X[s]$, If $P[s]$ is known transmit data at the receiver(pilot), the channel response and the recovery of the transmit data are $Hp[s]=Yp[s]/P[s]$ and $X[s]=Y[s]/Hp[s]$.
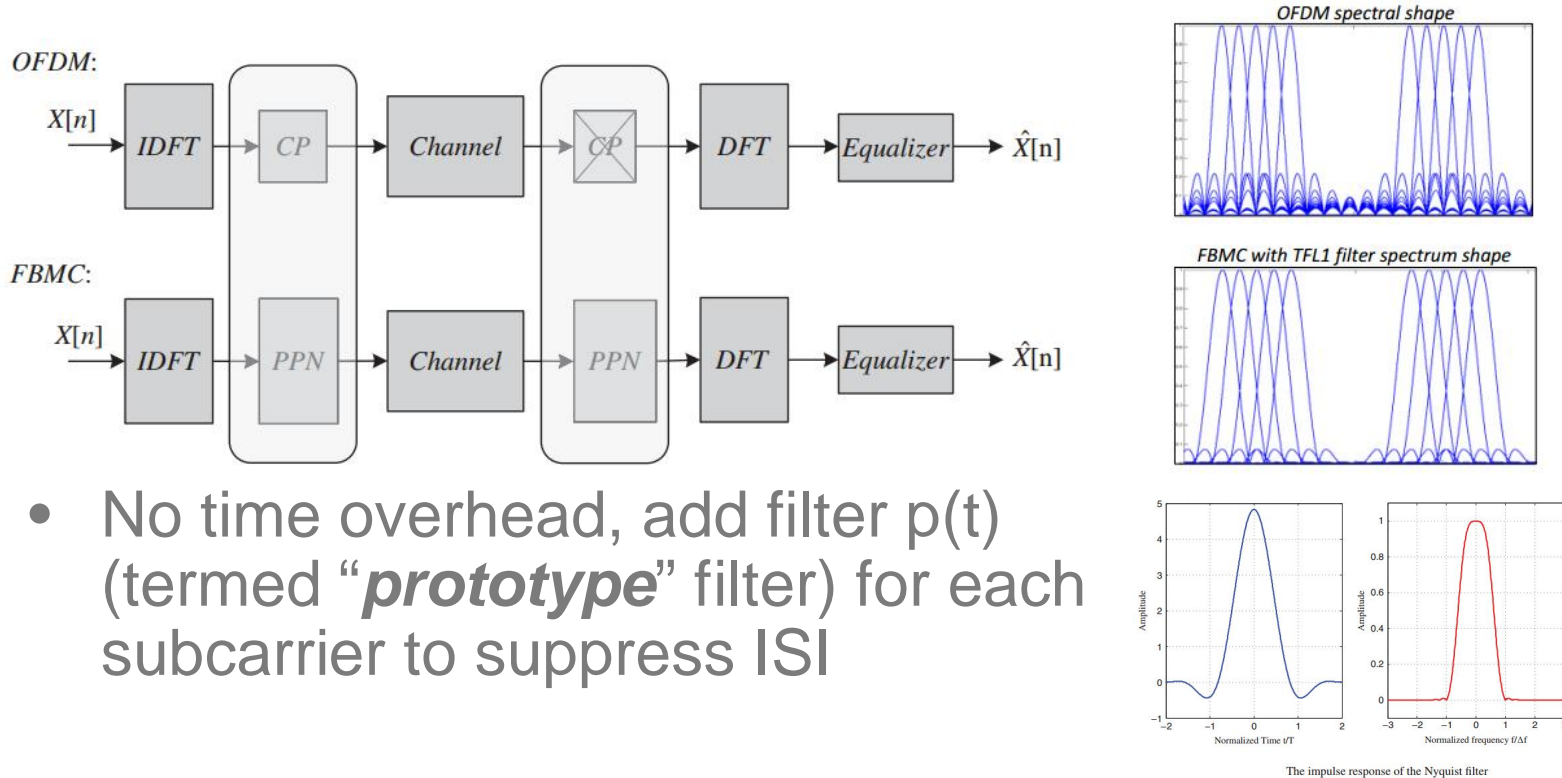
© Tieto Corporation

tieto
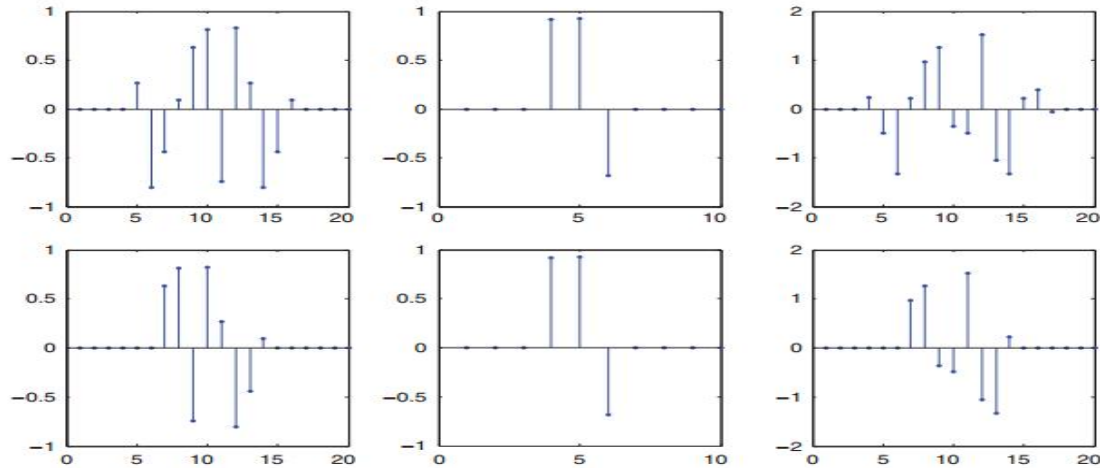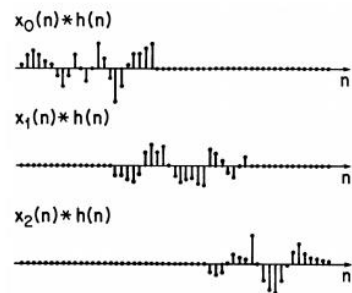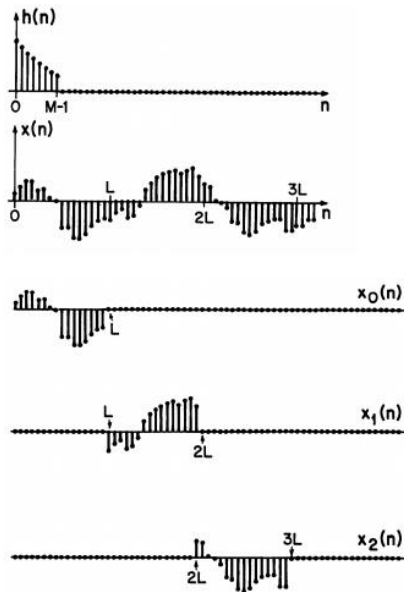
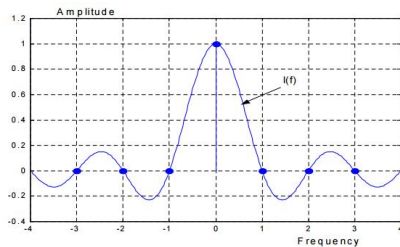|	4	3	2	1		4	3	2	1
			5	2				5	2
	8	6	4	2		8	6	4	2
20	15	10	5			15	10	5	**20**
20	23	16	20	2		23	16	20	22

Fourier coefficients of $(\sum c_k e^{ikx})(\sum d_k e^{ikx})$

tieto

Drawbacks of OFDM

- High out-of-band (OOB) emission: rectangular pulses in the time domain leads to a slowly decaying in the frequency domain, this makes OFDM unsuited for use in fragmented spectrum scenarios; in 4G OOB emission controlled by inserting null tones at the spectrum edges or filtering the whole OFDM signal with a selective filter(filtered-OFDM, longer CP), both lead to a loss in spectral efficiency, high inter-carrier interference (ICI) and severe adjacent-channel interference (ACI)

- Cyclic prefix (CP) degrades spectral efficiency

- The need for strict frequency and time synchronization among blocks and subcarriers(maintain orthogonality) does not match well with the IoT scenario, wherein many devices have to access the channel with short data frames. Also a key issue in the uplink of a cellular network wherein different mobile terminals transmit separately, and in the downlink when base station coordination is used

tieto

Filter-bank Multicarrier (FBMC)

- No time overhead, add filter p(t) (termed "***prototype***" filter) for each subcarrier to suppress ISI
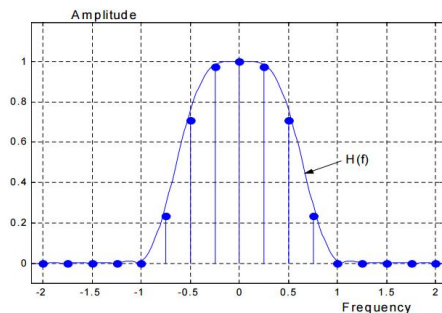
Amplitude

I(f)

FFT filter frequency response and coefficients in the frequency domain

$$H(f) = \sum_{k=-(K-1)}^{K-1} H_k \frac{\sin(\pi(f - \frac{k}{MK})MK)}{MK \sin(\pi(f - \frac{k}{MK}))}$$
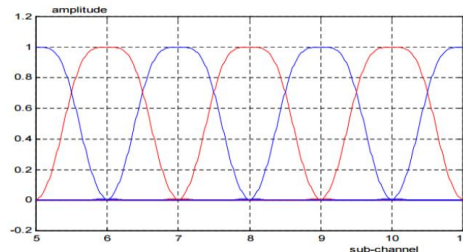
$$h(t) = 1 + 2\sum_{k=1}^{K-1} H_k \cos(2\pi \frac{kt}{KT})$$
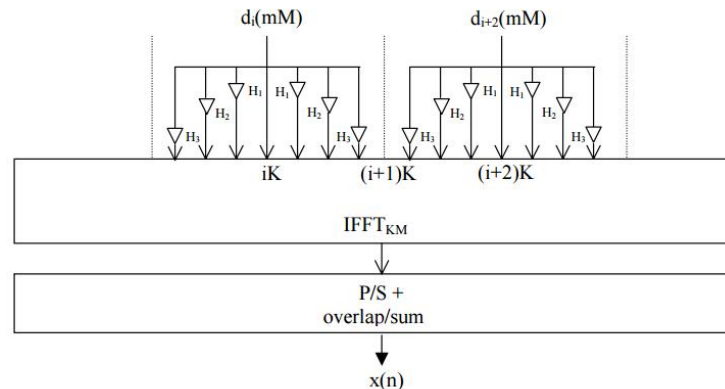
Frequency-domain prototype filter coefficients

K	H_0	H_1	H_2	H_3
2	1	$\sqrt{2}/2$	-	-
3	1	0.911438	0.411438	-
4	1	0.971960	$\sqrt{2}/2$	0.235147

Amplitude

H(f)

Prototype filter frequency coefficients and frequency response for K=4

amplitude

sub-channel

Section of a filter bank based on the prototype with K=4

$d_i(mM)$ $d_{i+2}(mM)$

H_1 H_1 H_1 H_1
H_2 H_2 H_2 H_2
H_3 H_3 H_3 H_3

iK   (i+1)K   (i+2)K

$IFFT_{KM}$

P/S +
overlap/sum

x(n)

Weighted frequency spreading and extended iFFT

- Prototype filters are characterized by the ***overlapping factor*** K, which is the ratio of the filter impulse response duration to the multicarrier symbol period *T*. The factor *K* is also the number of multicarrier symbols which overlap in the time domain. Generally, *K* is an integer number and, in the frequency domain, it is the number of frequency coefficients which are introduced between the FFT filter coefficients.

tieto
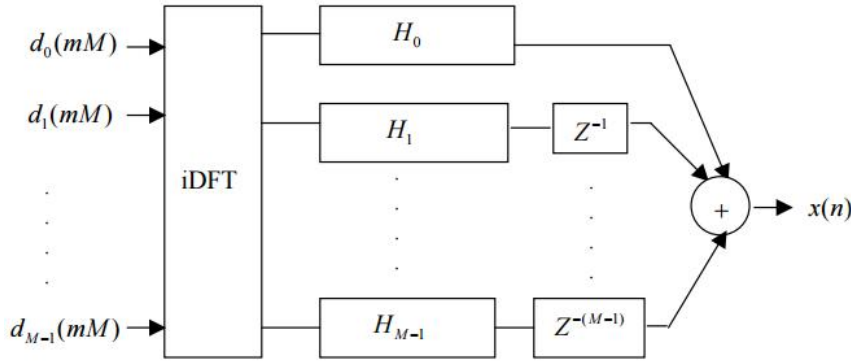
PPN-iFFT implementation of the transmitter filter bank

$$\begin{bmatrix} B_0(Z) \\ B_1(Z) \\ . \\ . \\ B_{M-1}(Z) \end{bmatrix} = \begin{bmatrix} 1 & 1 & . & . & 1 \\ 1 & W^{-1} & . & . & W^{-M+1} \\ . & . & . & . & . \\ . & . & . & . & . \\ 1 & W^{-M+1} & . & . & W^{-(M-1)^2} \end{bmatrix} \begin{bmatrix} H_0(Z^M) \\ Z^{-1}H_1(Z^M) \\ . \\ . \\ Z^{-(M-1)}H_{M-1}(Z^M) \end{bmatrix}$$

$$B_1(f) = H(f - \frac{1}{M}) = \sum_{i=0}^{L-1} h_i e^{-j2\pi i(f-1/M)}$$

$$H(f) = \sum_{i=0}^{L-1} h_i e^{-j2\pi i f} \qquad H(Z) = \sum_{p=0}^{M-1} H_p(Z^M)Z^{-p} \qquad B_1(Z) = \sum_{i=0}^{L-1} h_i e^{j2\pi i/M} Z^{-i}$$

$$L = K M$$

$$H(Z) = \sum_{i=0}^{L-1} h_i Z^{-i} \qquad H_p(Z^M) = \sum_{k=0}^{K-1} h_{kM+p} Z^{-kM} \qquad B_1(Z) = \sum_{p=0}^{M-1} e^{j\frac{2\pi}{M}p} Z^{-p} H_p(Z^M)$$

- Polyphase network-FFT(PPN-FFT) implementation proposed to reduce the computational complexity
- FBMC in massive MIMO has the impact of reducing (i) complexity; (ii) sensitivity to carrier frequency offset (CFO); (iii) (PAPR); (iv) system latency; and (v) increasing bandwidth efficiency.

tieto
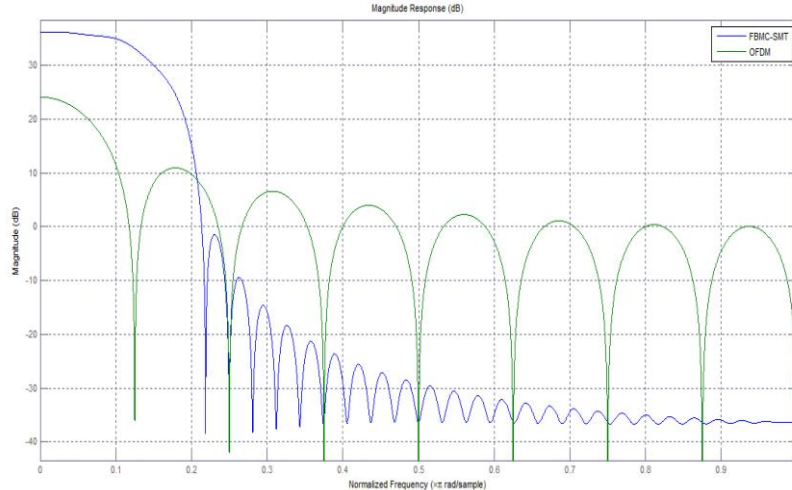
OFDM and FBMC-SMT filter response for K=4.
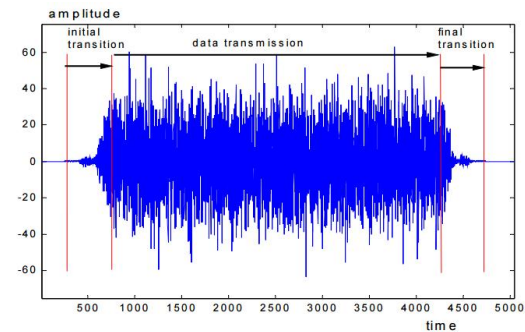

Structure of the transmitted burst with FBMC
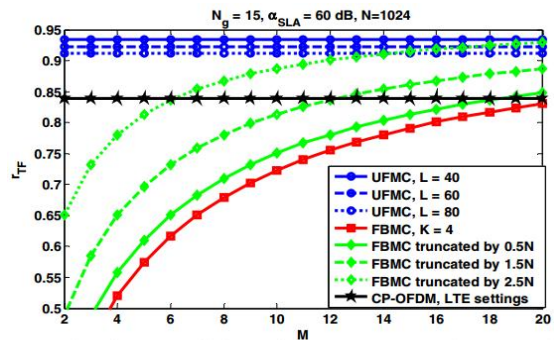
Time-frequency efficiency of FBMC, CP-OFDM and UFMC. *M* is the length of the respective burst.
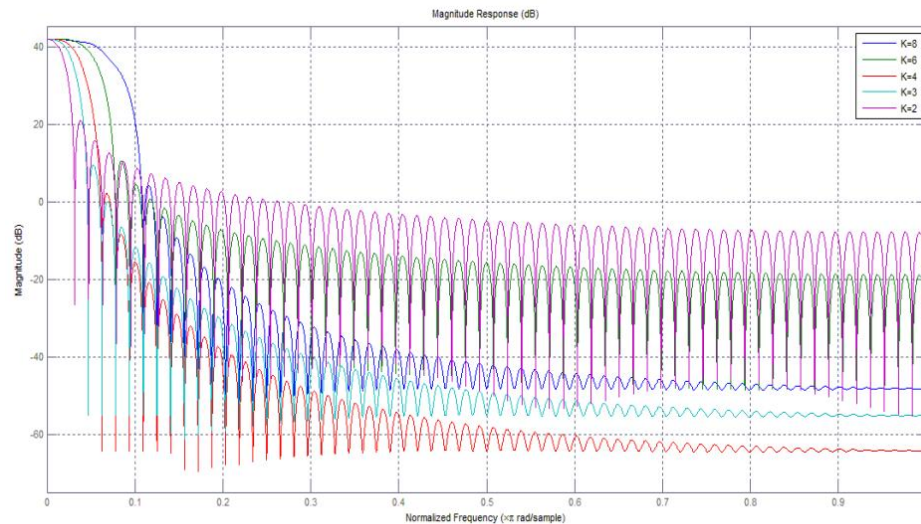
Filter response for various values of K.

15   © Tieto Corporation

tieto

Generalized Frequency Division Multiplexing(GFDM)
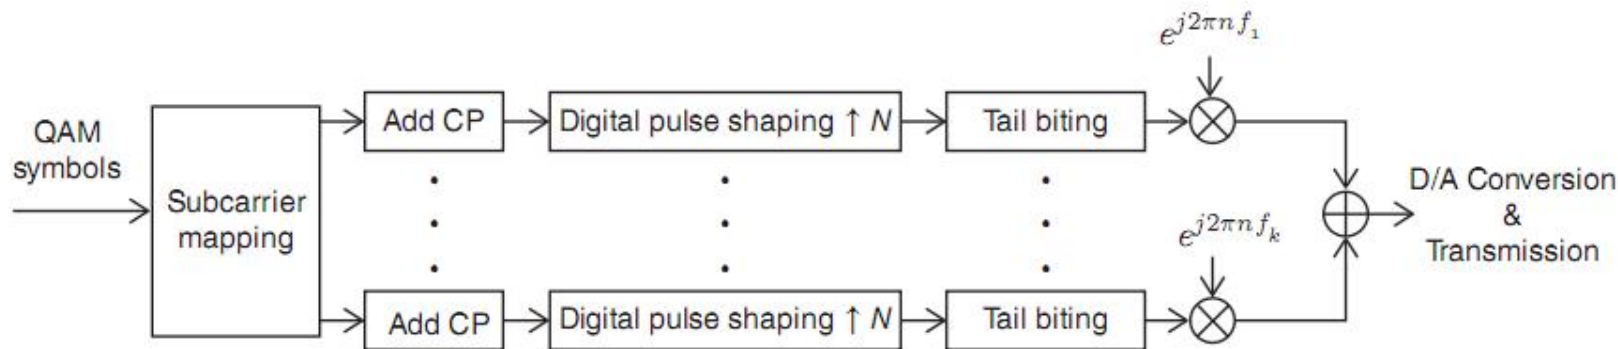
- A pure multicarrier modulation with low OOB emissions, suit for fragmented spectrum
- Ues of CP, retains OFDM advantages: robust to multipath channels, ease of equalization, eficiently implemented

- CP > impulse responses of
    (shaping filter + channel + receive filter)
- Tail-biting technique is an eficient strategy, the transmit filter impulse response length is not taken into account
- One possible receiver architecture is as below, equalized data signal is obtained from IFFT
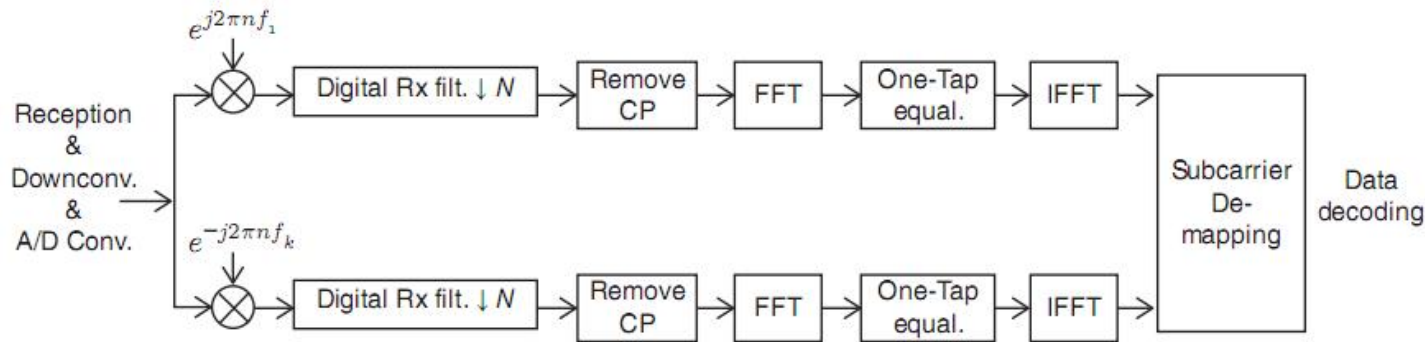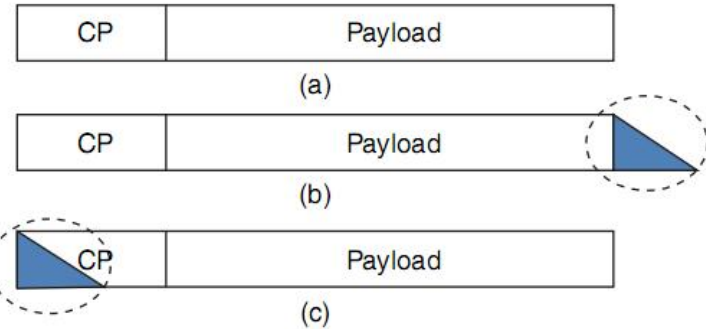
# Bi-orthogonal Frequency Division Multiplexing(BFDM)

$$\left\langle g(t), g(t - \ell T)e^{j2\pi nF(t-\ell T)} \right\rangle = 0, \quad \forall\, \ell, n \neq 0$$

- Prototype filter g(t) of classical OFDM should be orthogonal to a suitable time-frequency shifted version of itself
- Implies that the same filter is used at the transmitter and receiver

$$\left\langle g(t), \gamma(t - \ell T)e^{j2\pi nF(t-\ell T)} \right\rangle = 0, \quad \forall\, \ell, n \neq 0$$

- per-fect demodulation (in the noiseless case) can also be obtained when the receiver employs a different receive filter γ(t)
- Provide lower ICI and ISI
- Introduce additional degrees of freedom

tieto

Universal Filtered Multicarrier(UFMC)
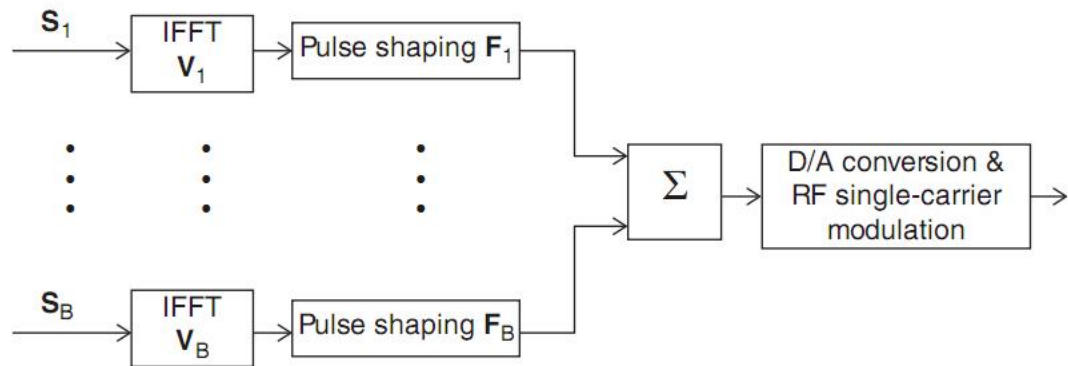
$$x_0 = \cosh\left(\frac{1}{N-1}\cosh^{-1}\left(10^{-\frac{A}{20}}\right)\right)$$

$$T_n(x) = \begin{cases} \cos(n\cos^{-1}(x)) & |x| \leq 1 \\ \cosh(n\cosh^{-1}(x)) & |x| > 1 \end{cases}$$

$$p(n) = \frac{1}{N}\left[10^{-\frac{A}{20}} + 2\sum_{k=1}^{(N-1)/2} T_{N-1}\left(x_0\cos\left(\frac{k\pi}{N}\right)\right)\cos\left(\frac{2\pi nk}{N}\right)\right]$$

- Subcarriers are filtered in groups
- Dolph-Chebyshev(DC) pulse has been recommended for the UFMC modulation

- The DC pulse minimizes the main lobe width for a given sidelobe attenuation; RRC pulse: minimize ISI; the PHYDYAS pulse: discrete-time pulse for FBMC

- Alternatives to the rectangular pulse adopted: compromise between their side lobe levels in the frequency domain, and their extension in the time-domain.

tieto
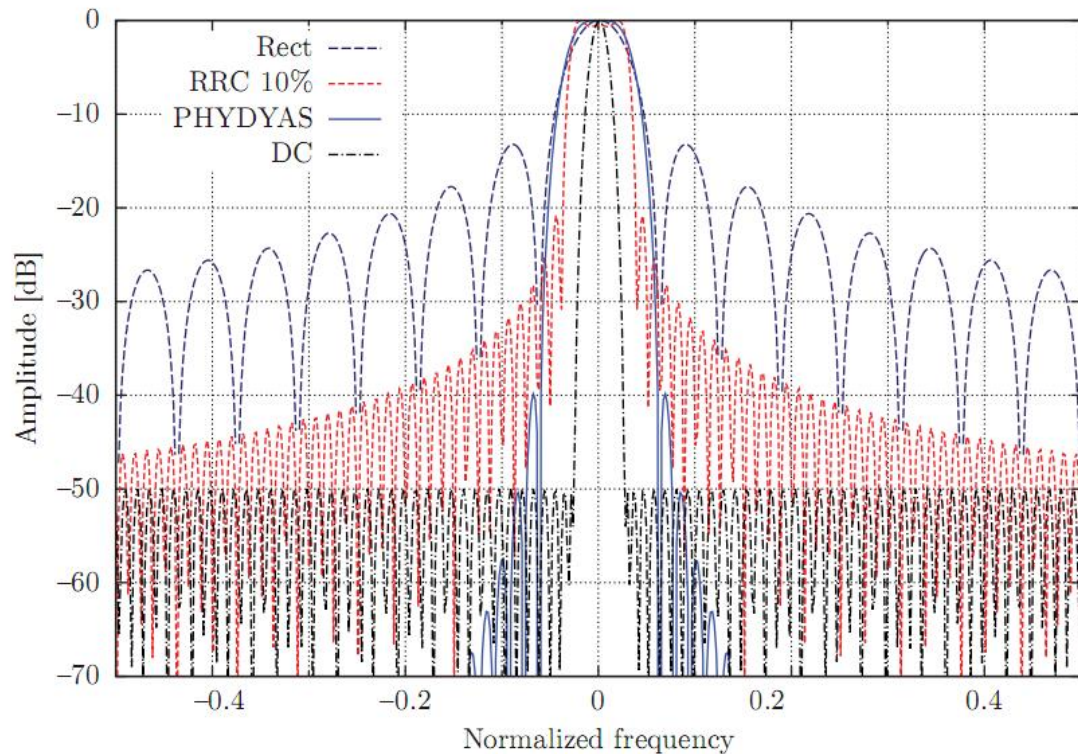
Faster-than-Nyquist(FFT) Signaling

- Finite-order constellations are used, it is possible give up the orthogonality condition

- FTN signaling is a linear modulation technique that reduces the time spacing between two adjacent pulses(the symbol time) to well below that ensuring the Nyquist condition,thus introducing controlled ISI


(a)

(b)

Saving Bandwidth: $(1-\alpha)\times100\%$
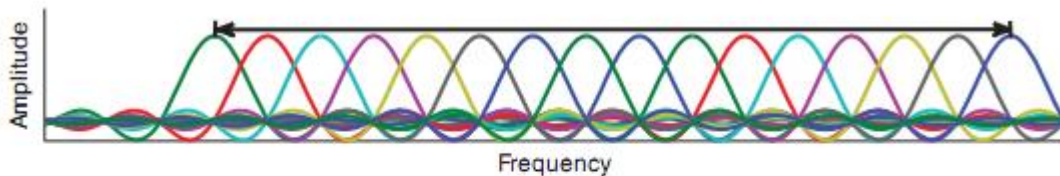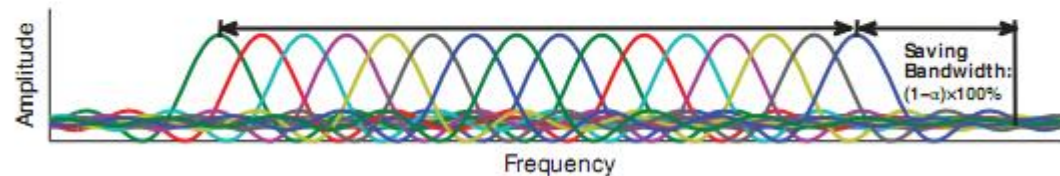
$$x(t) = \sqrt{E_s} \sum_n \sum_\ell x_n^{(\ell)} p(t - n\delta_t T) e^{j2\pi\ell\delta_f Ft}$$

- The turbo method is more or less identified with FTN, close to Shannon limit

tieto

Single-carrier Schemes

- mmWaves channel models based on measurements, pass loss proportion huge, have oxygen and rain absorbtion

- Propagation attenuation of mmWaves make them a viable technology only for small-cell, dense networks, where few users will be associated to any given base station.

- mmWaves operated together with massive MIMO to overcome propagation attenuation. This makes digital beamforming unfeasible, since the energy required for DA and AD conversion would be huge. Thus, each user will have an own radio-frequency beamform, which which requires users to be separated in time rather than in frequency.

tieto
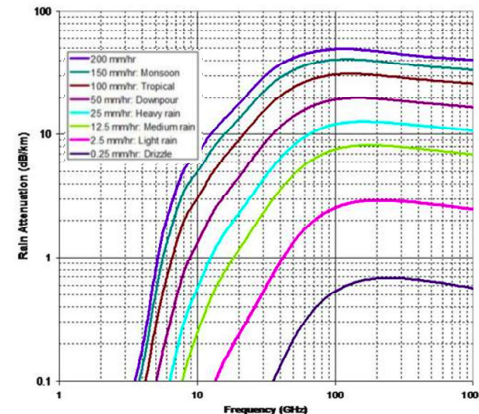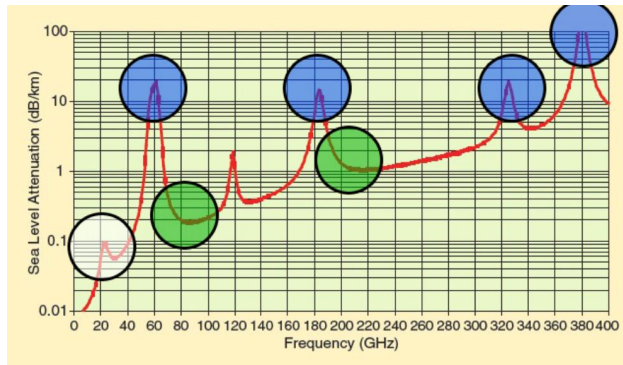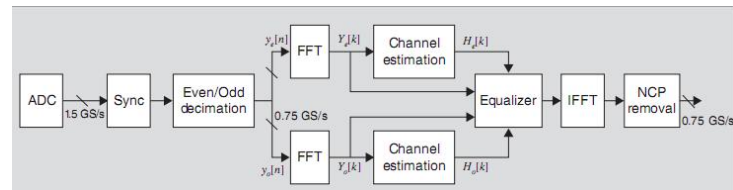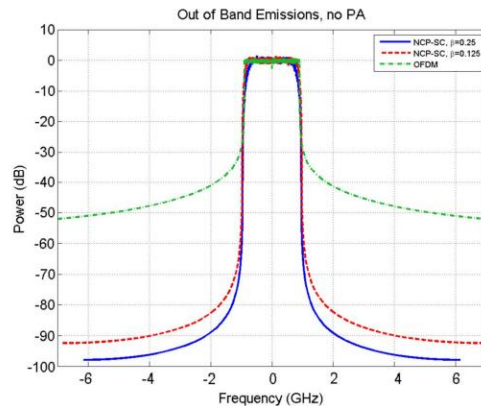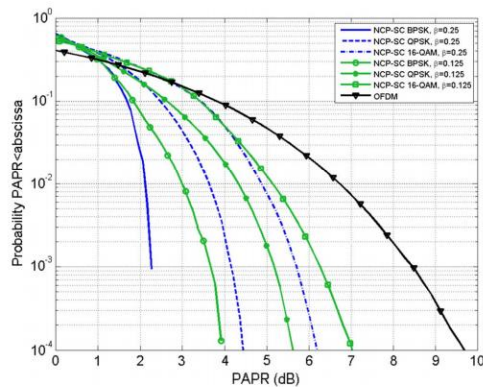
- The null cyclic preix is part of the transmit symbol, it possible to adapt the length of the prefix of each user without disrupting the frame timing(slots, size, length), because the length of each user's transmit symbol is always kept constant to N.

- The NCP-SC has a much lower PAPR and much lower OOB emissios than OFDM

- The presence of time intervals in which no useful data are present makes it easier to estimate the interference-plus-noise power at the receiver

- A more IFFT operation is required for Null CP Single Carrier

tieto

What is the "best"?

- It depends, aach scheme has its pros and cons
- E.g. :

  UFMC, no CP, low sidelobe, overcome ICI;

  FBMC, no CP, low sidelobe but long shaping filter, low eficiency in IoT;

  GFDM, great flexibility; FTN, max throughput

- PHY-layer functions will be partly virtualized and implemented in a data-center.
- In future the modulation scheme itself might be changed according to the operating scenario in a SDN framework.

tieto

Public

我们的全部通信无非幻影，各人只是在给自己写信。
——纪德《窄门》

tieto

Long Zhang

Hardware Engineer
Tieto Oyj, ZSR Product Development Services /
long.a.zhang@tieto.com