First generation app manual

Install, connect and prepare

Before starting: use the matching app on Android 7.0 / API 24 or later, with a compatible device server reachable from the phone. Have the device network details and your team's approved assay instructions ready.

1 Install the matching app

Download the first-generation APK. The supplied package is **com.chuangxin.socket_test**, version 1.0. Follow Android's installation prompt. Keep the app generation with your experiment record.

2 Connect to the device

Join a network that can reach the device server. Enter its IP address and TCP port, select **Connect to Server**, and check the returned status. **10.42.0.1:8080** is the recorded example; use your device's actual address.



Connection controls from a supplied screen. This is a shared interface reference; the exact screenshot build has not been identified.

3 Find the app screens

Use **Ded., Data and Setting** to move between supported screens. Ded. displays returned images and tube labels; Data shows received curves and temperature. Setting contains timing and device controls.

4 Set timing and device controls

In Setting, adjust the heating-time control or use **Manually enter the time**; the +10s and -10s buttons adjust the app timer. **Heating countdown** controls that timer. Use the temperature controls only according to the matching device and assay instructions. Check returned temperature and status when monitoring the device.

Device information to be added

Network name/password, confirmed app-device compatibility, the device start/shutdown sequence, and assay-specific temperatures and durations are not supplied here. A running app countdown alone does not confirm that the device has started.


The Hardware manual and operation video currently lead to the common Hardware page. Their final sections and links will be added by the team.

Sources: supplied Software Word materials, earlier illustrated guide, and generation-matched Android source at b06ba6a. Prepared 6 October 2026.

App source | Hardware manual (to be added) | Hardware video (to be added)

First generation app manual

Monitor, inspect and reconnect

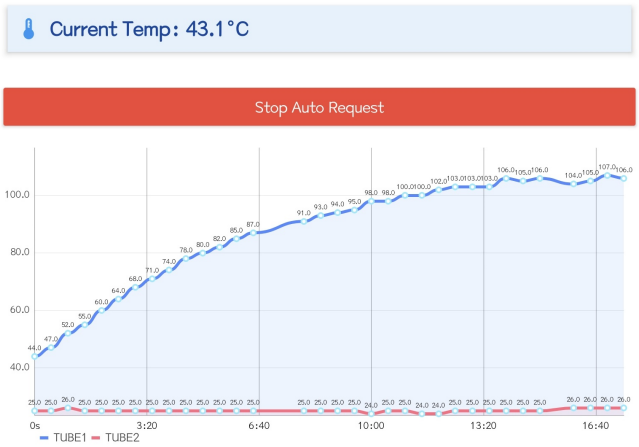

Supplied data-view detail with TUBE1 and TUBE2. The original values and axes are retained; screenshot build attribution is still to be confirmed.

5 Monitor the returned data

Open Data and check temperature and the received curve updates. The first-generation source plots two series, TUBE1 and TUBE2. The automatic-request control starts or stops repeated image requests; curve and temperature updates depend on the connected server.

6 Request and inspect an image

Open Ded. and select **R-Image**. Inspect the returned image and the two tube-result fields. Read result labels according to the approved assay instructions. Tap the image for a larger view where that control is available.

7 Reconnect if updates stop

Check that the server is running, the phone can reach its network, and the IP and port match the device. Select **Reconnect** after disconnection, then request an image again and check the returned status. If the problem remains, record the app generation, Android version, connection status and affected screen for the team.

8 Keep the acquired image

After an image arrives, check for the save confirmation and the Android gallery. The client attempts to save the image when storage permission is available. If saving fails, review the app's storage permission and request the image again. Confirm that the file exists before leaving the session.

Information to be added

An exact first-generation screenshot set, confirmed temperature-control labels for the released APK, assay result thresholds, and a complete measurement-export/history procedure have not been supplied. Hardware manual and video details remain to be added.

Sources: supplied Software Word materials, earlier illustrated guide, and generation-matched Android source at b06ba6a. Prepared 6 October 2026.

App source Hardware manual (to be added) Hardware video (to be added)