Parametric ADR transient and cycle envelope

(a) 90 mK, 0.10 µW payload, 60 min

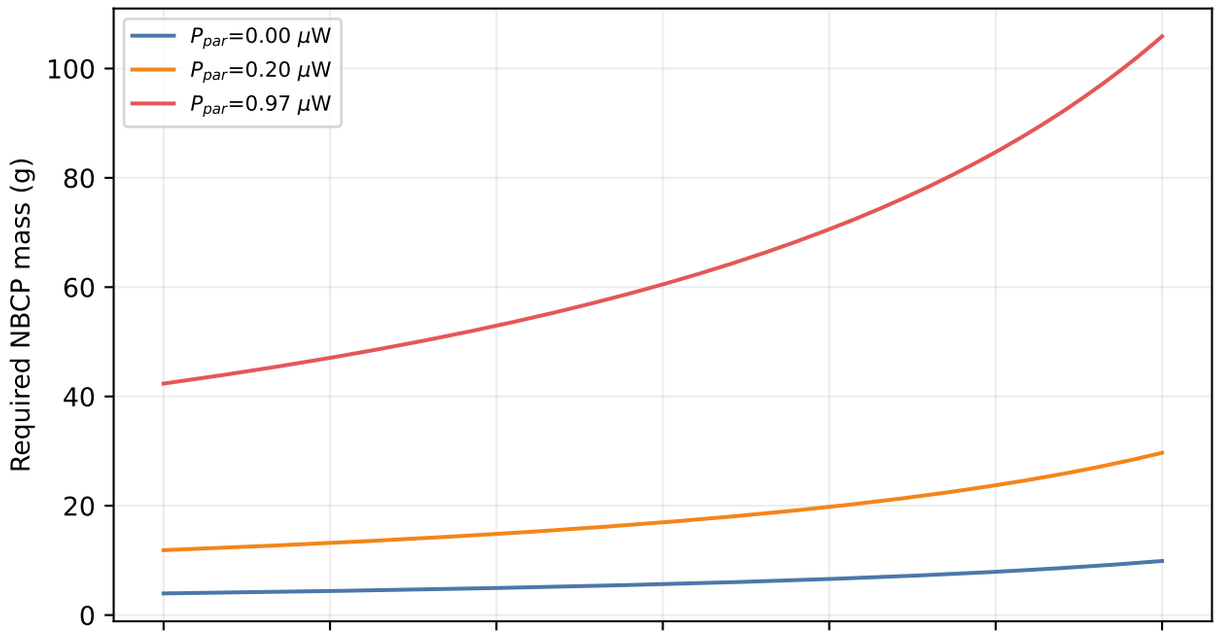

(b) Hold–recycle timing trade-off

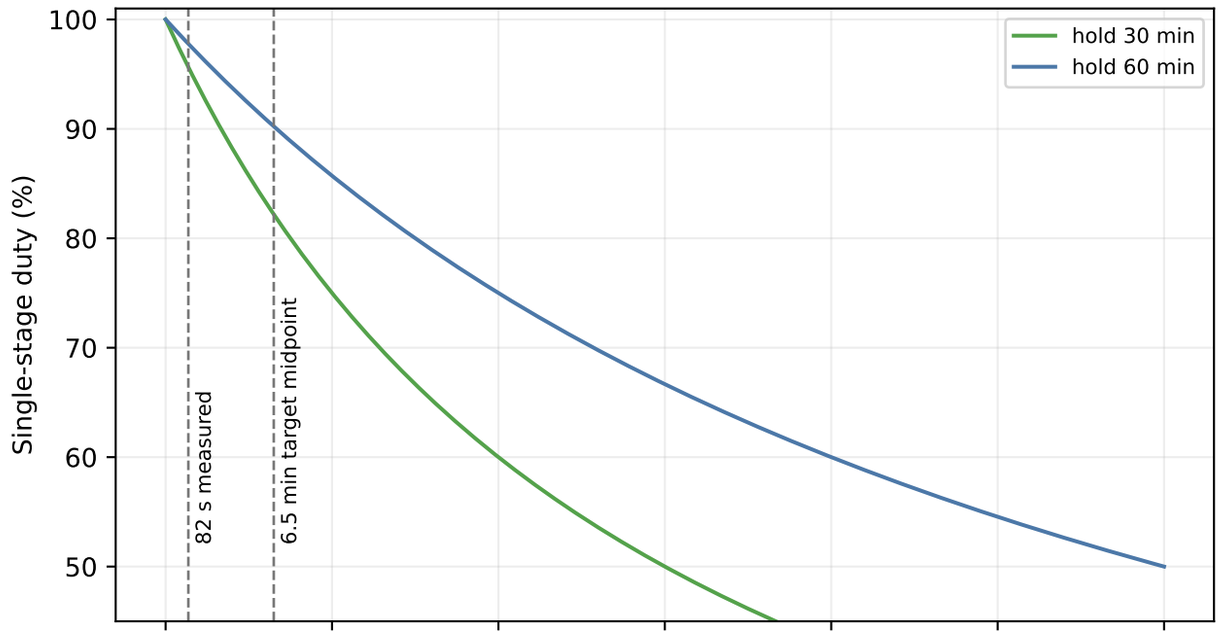

(c) Maximum transient fraction within mass cap

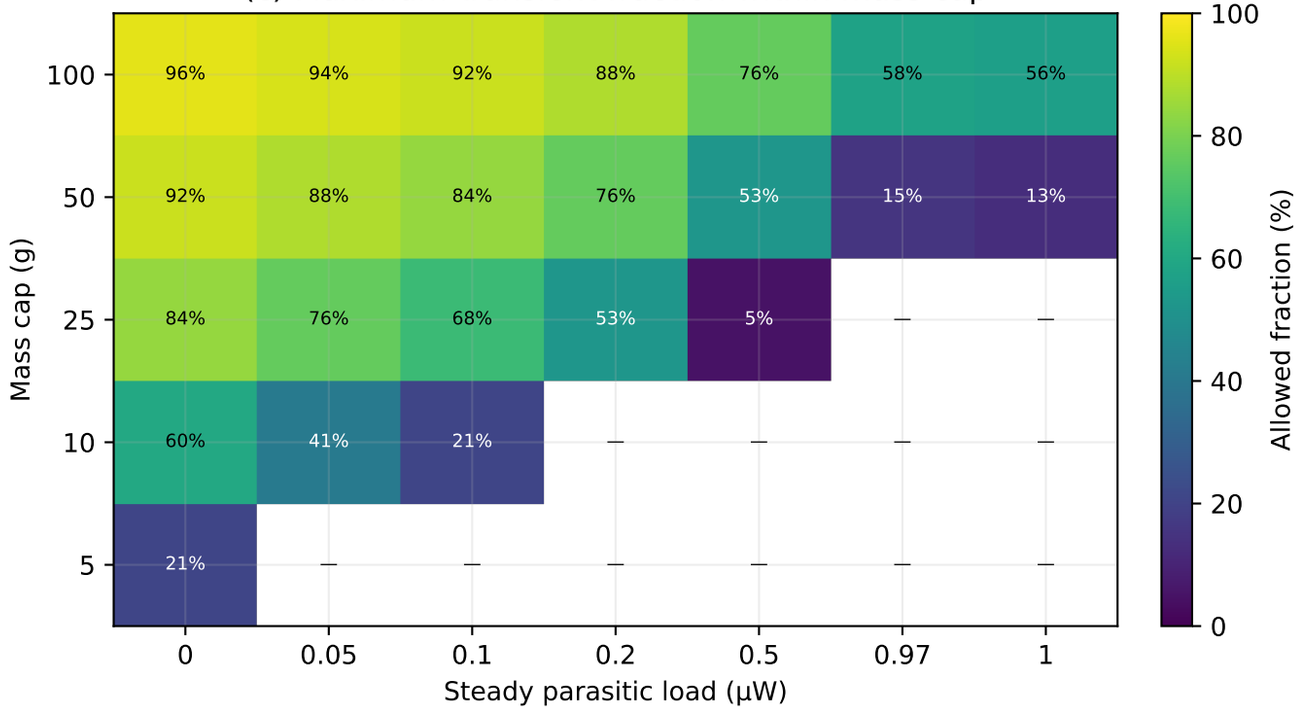
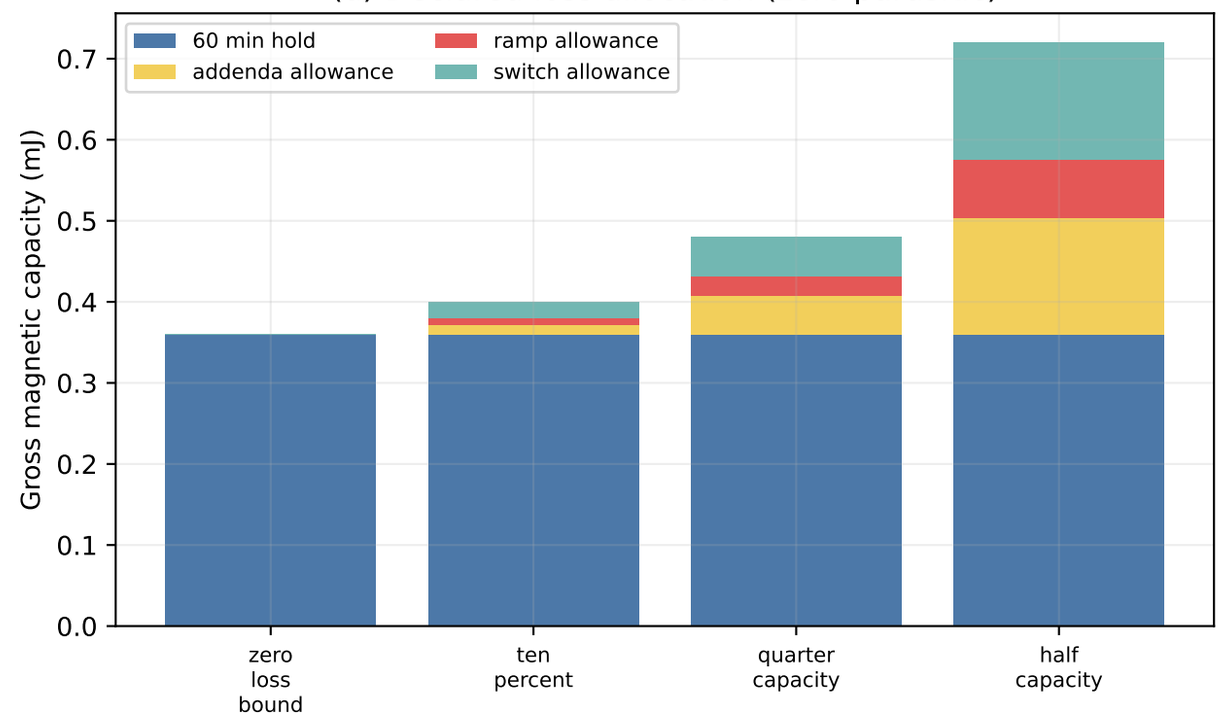
(d) Declared loss allocation (zero parasitic)