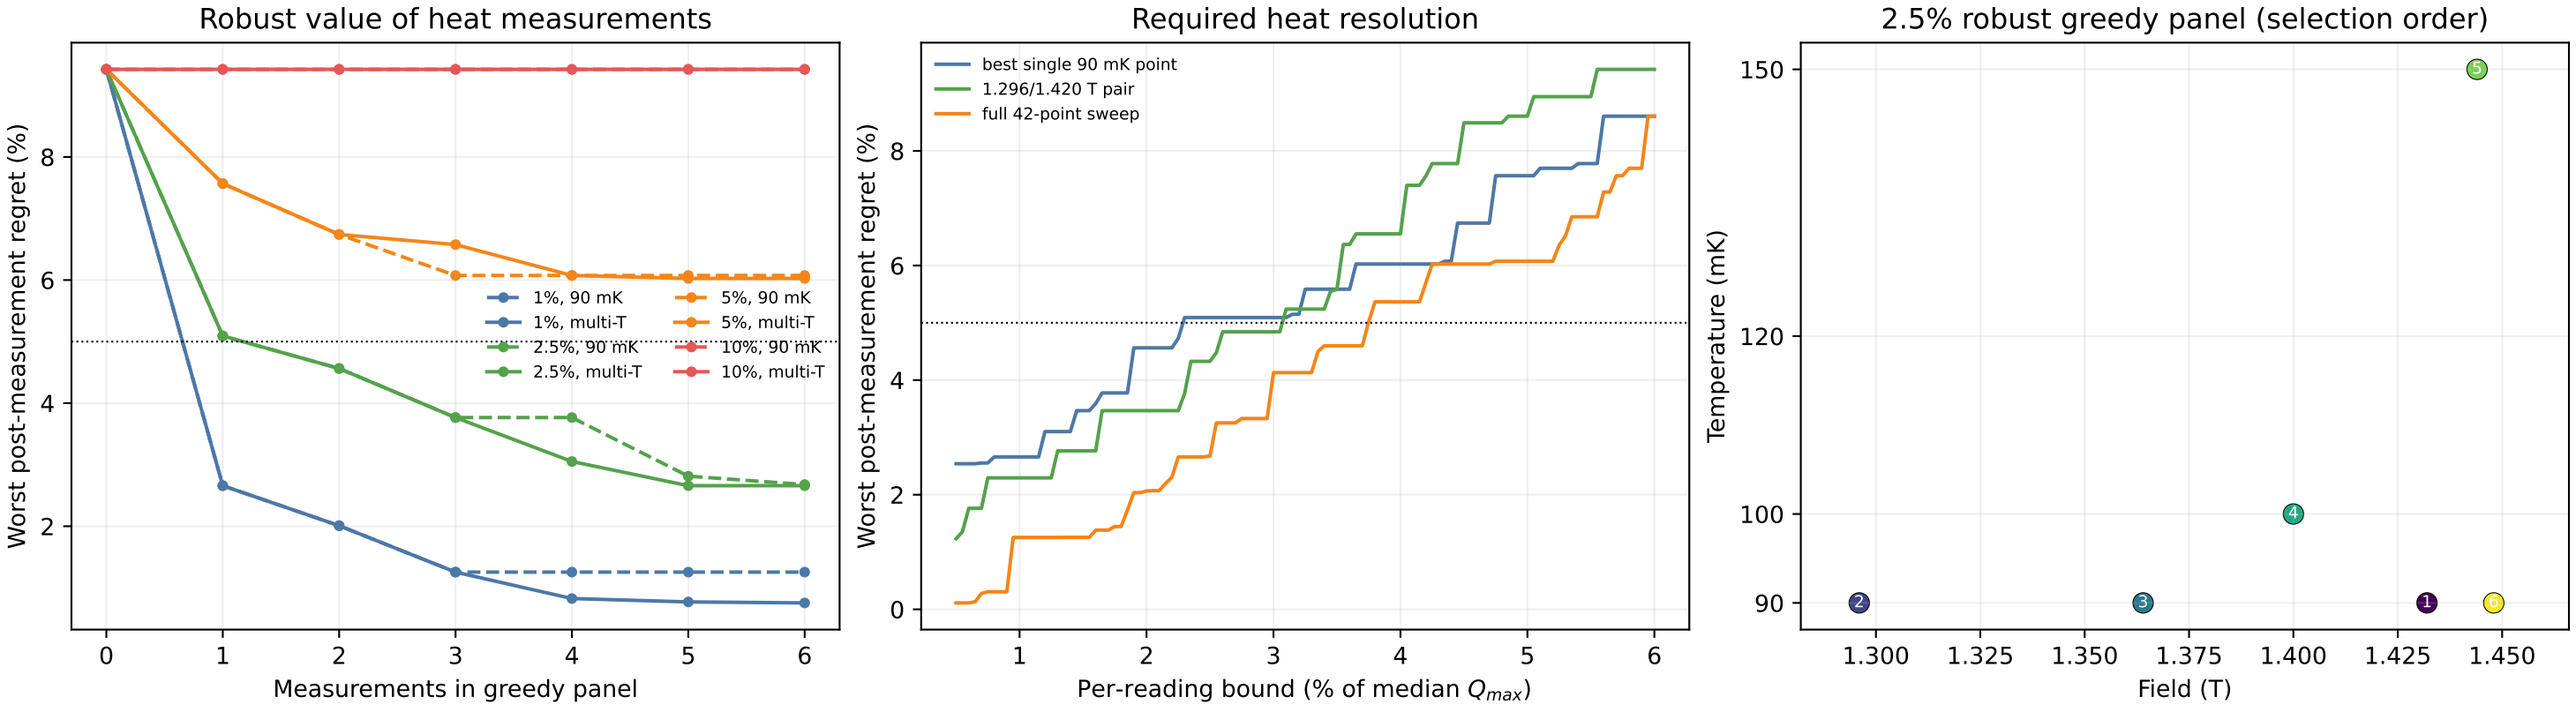
Robust value of heat measurements
Worst post-measurement regret (%)
Measurements in greedy panel
1%, 90 mK
1%, multi-T
2.5%, 90 mK
2.5%, multi-T
5%, 90 mK
5%, multi-T
10%, 90 mK
10%, multi-T
Required heat resolution
best single 90 mK point
1.296/1.420 T pair
full 42-point sweep
Per-reading bound (% of median Q_{max})
2.5% robust greedy panel (selection order)
Temperature (mK)
Field (T)