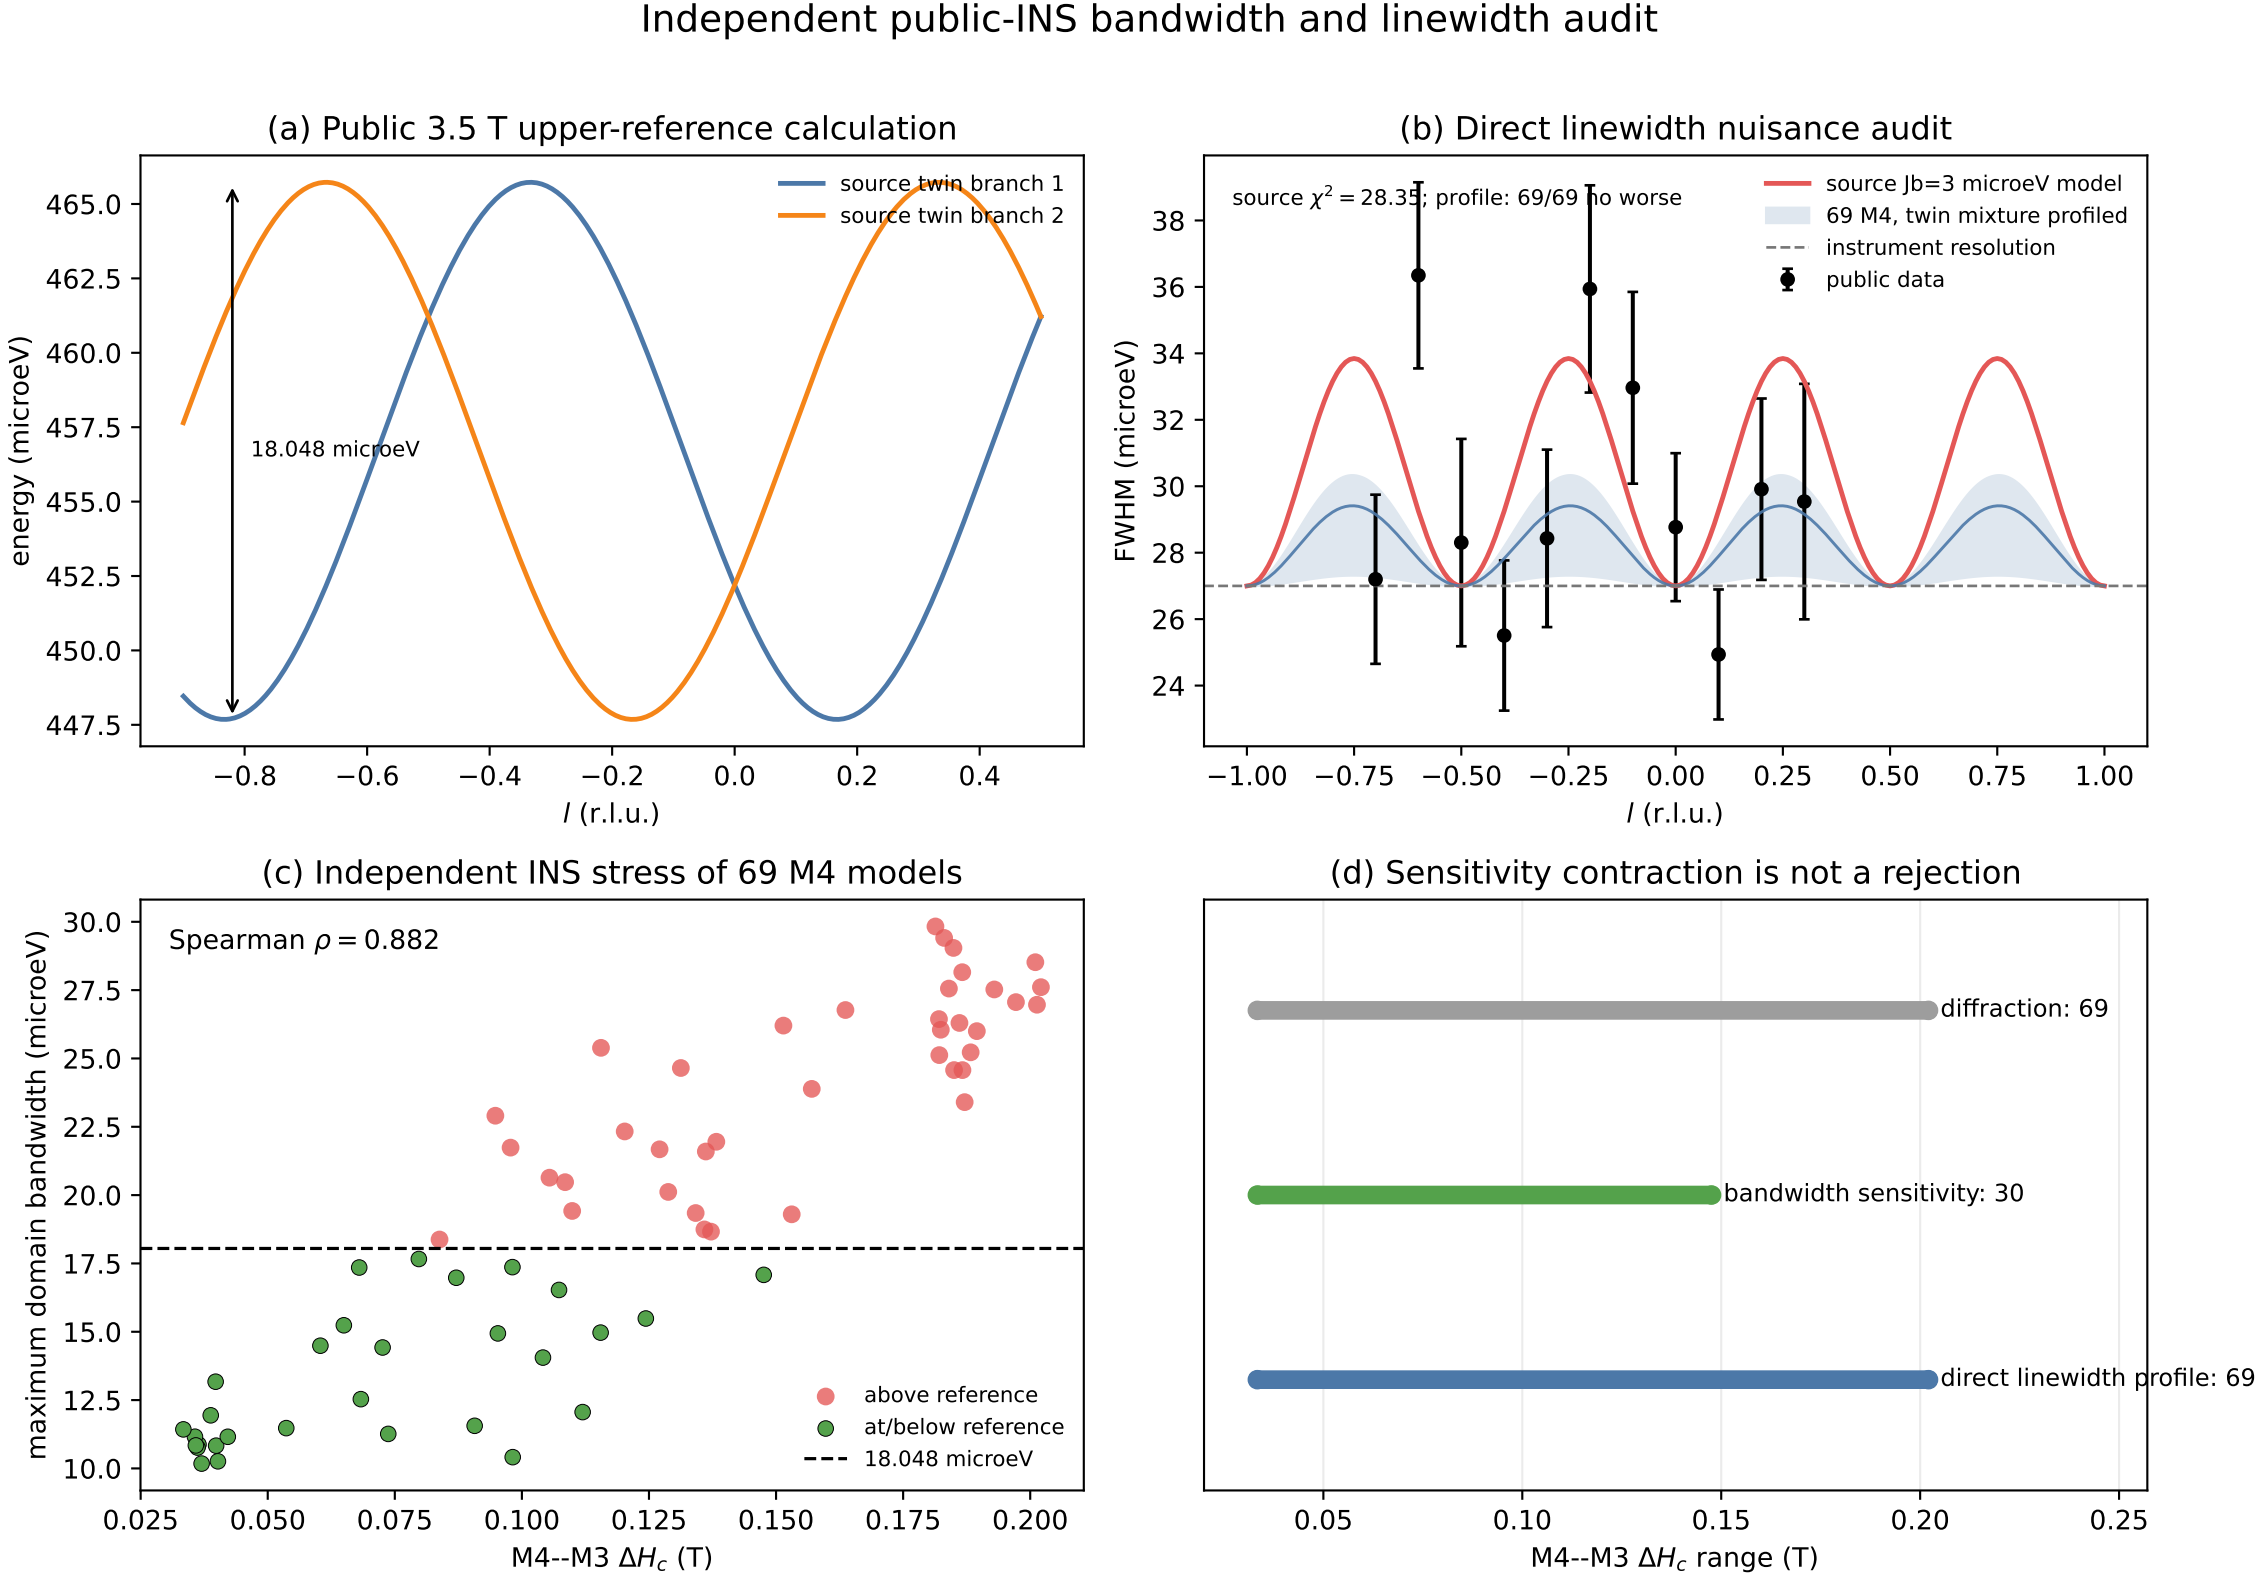
Independent public-INS bandwidth and linewidth audit
(a) Public 3.5 T upper-reference calculation
source twin branch 1
source twin branch 2
18.048 microeV
energy (microeV)
l (r.l.u.)
(b) Direct linewidth nuisance audit
source χ² = 28.35; profile: 69/69 no worse
source Jb=3 microeV model
69 M4, twin mixture profiled
instrument resolution
public data
FWHM (microeV)
l (r.l.u.)
(c) Independent INS stress of 69 M4 models
Spearman ρ = 0.882
above reference
at/below reference
18.048 microeV
maximum domain bandwidth (microeV)
M4--M3 ΔH_c (T)
(d) Sensitivity contraction is not a rejection
diffraction: 69
bandwidth sensitivity: 30
direct linewidth profile: 69
M4--M3 ΔH_c range (T)