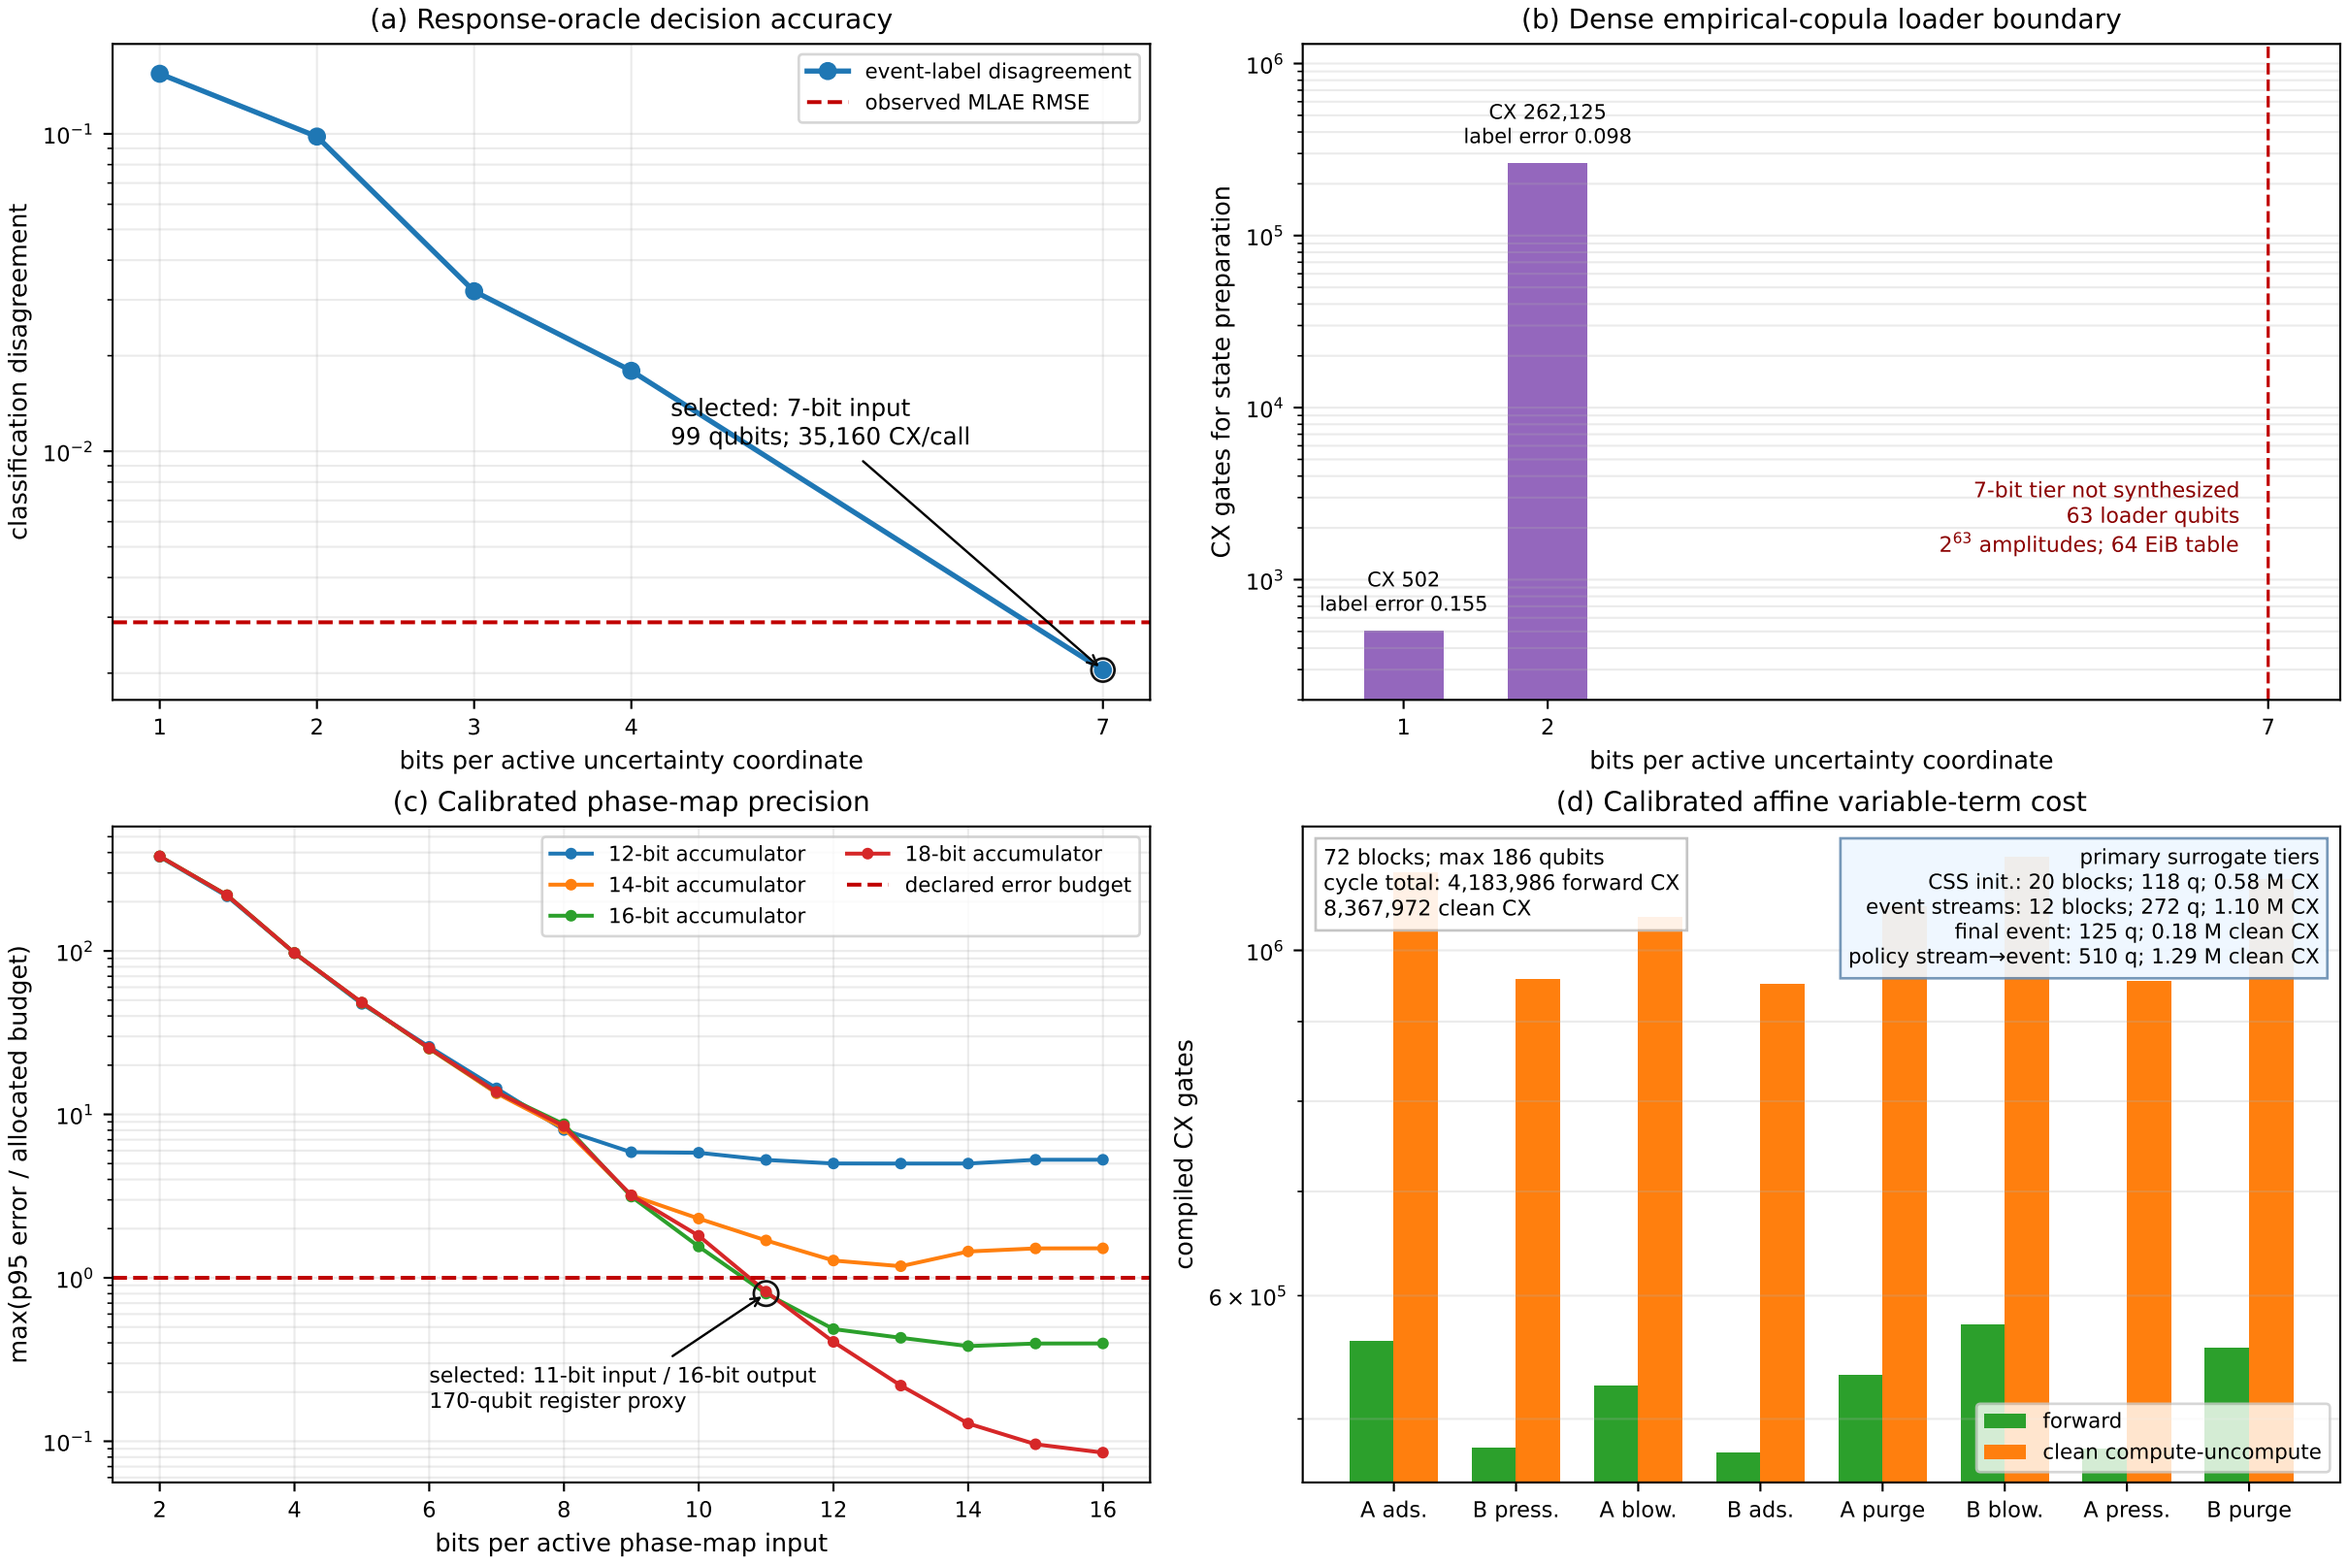
(a) Response-oracle decision accuracy
event-label disagreement
observed MLAE RMSE
classification disagreement
selected: 7-bit input
99 qubits; 35,160 CX/call
bits per active uncertainty coordinate
(b) Dense empirical-copula loader boundary
CX gates for state preparation
CX 262,125
label error 0.098
CX 502
label error 0.155
7-bit tier not synthesized
63 loader qubits
2^63 amplitudes; 64 EiB table
bits per active uncertainty coordinate
(c) Calibrated phase-map precision
12-bit accumulator
14-bit accumulator
16-bit accumulator
18-bit accumulator
declared error budget
max(p95 error / allocated budget)
selected: 11-bit input / 16-bit output
170-qubit register proxy
bits per active phase-map input
(d) Calibrated affine variable-term cost
72 blocks; max 186 qubits
cycle total: 4,183,986 forward CX
8,367,972 clean CX
primary surrogate tiers
CSS init.: 20 blocks; 118 q; 0.58 M CX
event streams: 12 blocks; 272 q; 1.10 M CX
final event: 125 q; 0.18 M clean CX
policy stream→event: 510 q; 1.29 M clean CX
compiled CX gates
forward
clean compute-uncompute
A ads.
B press.
A blow.
B ads.
A purge
B blow.
A press.
B purge